


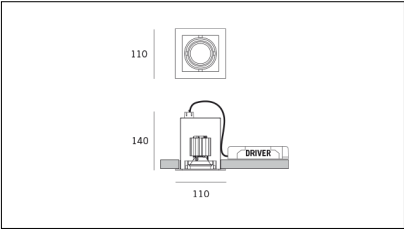






MACROLUX

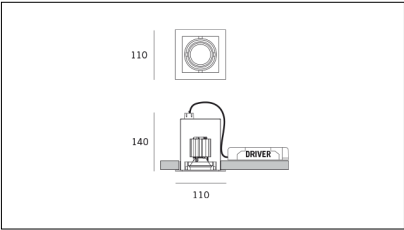



Article code	Article	Colour	Watt (W)	Light Temperature (°K)	Beam angle (°)	Additional colour
1925.0041.01.20.22	EOL_SY1/80/LED-22 6W 350mA 20°	Black (2)	6	3000	20	Black (2)
1925.0041.01.40.22	EOL_SY1/80/LED-22 6W 350mA 40°	Black (2)	6	3000	40	Black (2)
1925.0041.01.4000.40.22	EOL_SY1/80/LED-22 6W 350mA 40° 4000°K	Black (2)	6	4000	40	Black (2)
1925.0041.02.20.22	EOL_SY1/80/LED-22 9W 500mA 20°	Black (2)	9	3000	20	Black (2)
1925.0041.02.34.22	EOL_SY1/80/LED-22 9W 500mA 40°	Black (2)	9	3000	40	Black (2)
1925.0041.02.4000.20.22	*eol_simply	Black (2)	9	4000	20	Black (2)
1925.0041.02.4000.34.22	*eol_simply	Black (2)	9	4000	40	Black (2)



Article code	Article	Colour	Watt (W)	Light Temperature (°K)	Beam angle (°)	Additional colour
1925.0041.01.40.24	EOL_SY1/80/LED-24 6W 350mA 40°	Black (2)	6	3000	40	White (4)
1925.0041.02.20.24	EOL_SY1/80/LED-24 9W 500mA 20°	Black (2)	9	3000	20	White (4)
1925.0041.02.34.24	EOL_SY1/80/LED-24 9W 500mA 40°	Black (2)	9	3000	40	White (4)
1925.0041.02.4000.20.24	*eol_simply	Black (2)	9	4000	20	White (4)
1925.0041.02.4000.34.24	*eol_simply	Black (2)	9	4000	40	White (4)

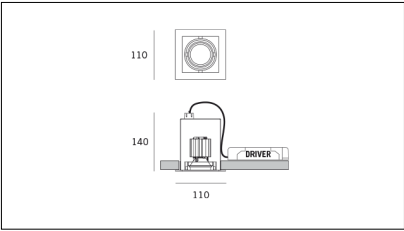

Article code	Article	Colour	Watt (W)	Light Temperature (°K)	Beam angle (°)	Additional colour
1925.0041.01.40.212	EOL_SY1/80/LED-212 6W 350mA 40°	Black (2)	6	3000	40	Grey Texture (12)
1925.0041.02.2700.34.212	EOL_SY1/80/LED-212 9W 500mA 34° 2700°K	Black (2)	9	2700	40	Grey Texture (12)
1925.0041.02.4000.20.212	*eol_simply	Black (2)	9	4000	20	Grey Texture (12)
1925.0041.02.4000.34.212	*eol_simply	Black (2)	9	4000	40	Grey Texture (12)

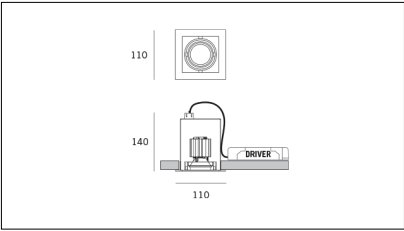

Article code	Article	Colour	Watt (W)	Light Temperature (°K)	Beam angle (°)	Additional colour
1925.0041.01.20.44	EOL_SY1/80/LED-44 6W 350mA 20°	White (4)	6	3000	20	White (4)
1925.0041.01.40.44	EOL_SY1/80/LED-44 6W 350mA 40°	White (4)	6	3000	40	White (4)
1925.0041.02.20.44	EOL_SY1/80/LED-44 9W 500mA 20°	White (4)	9	3000	20	White (4)
1925.0041.02.2700.34.44	EOL_SY1/80/LED-44 9W 500mA 40° 2700°K	White (4)	9	2700	40	White (4)
1925.0041.02.34.44	EOL_SY1/80/LED-44 9W 500mA 40°	White (4)	9	3000	40	White (4)
1925.0041.02.4000.20.44	*eol_simply	White (4)	9	4000	20	White (4)
1925.0041.02.4000.34.44	*eol_simply	White (4)	9	4000	40	White (4)