


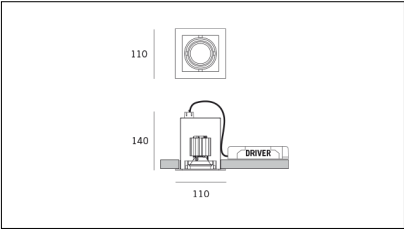






MACROLUX

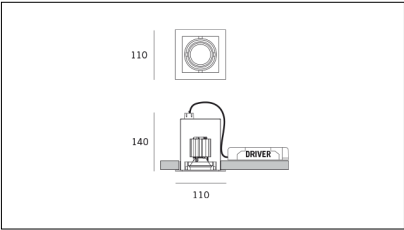



Codice Articolo	Articolo	Colore	Potenza (W)	Temperatura Luce (°K)	Emissione (°)	Colore aggiuntivo
1925.0041.01.20.22	EOL_SY1/80/LED-22 6W 350mA 20°	Nero (2)	6	3000	20	Nero (2)
1925.0041.01.40.22	EOL_SY1/80/LED-22 6W 350mA 40°	Nero (2)	6	3000	40	Nero (2)
1925.0041.01.4000.40.22	EOL_SY1/80/LED-22 6W 350mA 40° 4000°K	Nero (2)	6	4000	40	Nero (2)
1925.0041.02.20.22	EOL_SY1/80/LED-22 9W 500mA 20°	Nero (2)	9	3000	20	Nero (2)
1925.0041.02.34.22	EOL_SY1/80/LED-22 9W 500mA 40°	Nero (2)	9	3000	40	Nero (2)
1925.0041.02.4000.20.22	*eol_simply	Nero (2)	9	4000	20	Nero (2)
1925.0041.02.4000.34.22	*eol_simply	Nero (2)	9	4000	40	Nero (2)



Codice Articolo	Articolo	Colore	Potenza (W)	Temperatura Luce (°K)	Emissione (°)	Colore aggiuntivo
1925.0041.01.40.24	EOL_SY1/80/LED-24 6W 350mA 40°	Nero (2)	6	3000	40	Bianco (4)
1925.0041.02.20.24	EOL_SY1/80/LED-24 9W 500mA 20°	Nero (2)	9	3000	20	Bianco (4)
1925.0041.02.34.24	EOL_SY1/80/LED-24 9W 500mA 40°	Nero (2)	9	3000	40	Bianco (4)
1925.0041.02.4000.20.24	*eol_simply	Nero (2)	9	4000	20	Bianco (4)
1925.0041.02.4000.34.24	*eol_simply	Nero (2)	9	4000	40	Bianco (4)

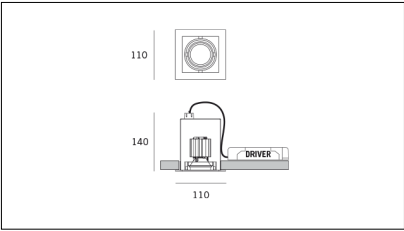

Codice Articolo	Articolo	Colore	Potenza (W)	Temperatura Luce (°K)	Emissione (°)	Colore aggiuntivo
1925.0041.01.40.212	EOL_SY1/80/LED-212 6W 350mA 40°	Nero (2)	6	3000	40	Grigio texturizzato (12)
1925.0041.02.2700.34.212	EOL_SY1/80/LED-212 9W 500mA 34° 2700°K	Nero (2)	9	2700	40	Grigio texturizzato (12)
1925.0041.02.4000.20.212	*eol_simply	Nero (2)	9	4000	20	Grigio texturizzato (12)
1925.0041.02.4000.34.212	*eol_simply	Nero (2)	9	4000	40	Grigio texturizzato (12)

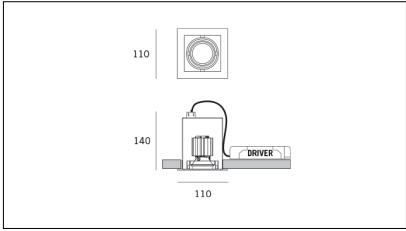

Codice Articolo	Articolo	Colore	Potenza (W)	Temperatura Luce (°K)	Emissione (°)	Colore aggiuntivo
1925.0041.01.20.44	EQL_SY1/80/LED-44 6W 350mA 20°	Bianco (4)	6	3000	20	Bianco (4)
1925.0041.01.40.44	EQL_SY1/80/LED-44 6W 350mA 40°	Bianco (4)	6	3000	40	Bianco (4)
1925.0041.02.20.44	EQL_SY1/80/LED-44 9W 500mA 20°	Bianco (4)	9	3000	20	Bianco (4)
1925.0041.02.2700.34.44	EQL_SY1/80/LED-44 9W 500mA 40° 2700°K	Bianco (4)	9	2700	40	Bianco (4)
1925.0041.02.34.44	EQL_SY1/80/LED-44 9W 500mA 40°	Bianco (4)	9	3000	40	Bianco (4)
1925.0041.02.4000.20.44	*eol_simply	Bianco (4)	9	4000	20	Bianco (4)
1925.0041.02.4000.34.44	*eol_simply	Bianco (4)	9	4000	40	Bianco (4)