


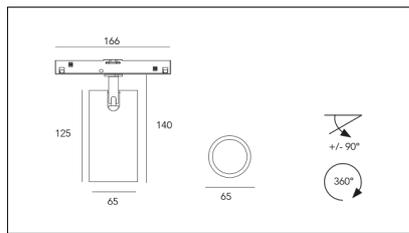




# MACROLUX



| Article code          | Article                     | Colour    | Light Temperature (°K) | Beam angle (°) | Watt (W) |
|-----------------------|-----------------------------|-----------|------------------------|----------------|----------|
| 139.0048.01.14.2      | MICO/48V/DALI/14°-2         | Black (2) | 3000                   | 14             | 8,6      |
| 139.0048.01.25.2      | MICO/48V/DALI/25°-2         | Black (2) | 3000                   | 25             | 8,6      |
| 139.0048.01.2700.14.2 | *MICO/48V/DALI/14°/2700°K-2 | Black (2) | 2700                   | 14             | 8,6      |
| 139.0048.01.2700.25.2 | MICO/48V/DALI/25°/2700°K-2  | Black (2) | 2700                   | 25             | 8,6      |
| 139.0048.01.2700.35.2 | MICO/48V/DALI/35°/2700°K-2  | Black (2) | 2700                   | 34             | 8,6      |
| 139.0048.01.35.2      | MICO/48V/DALI/35°-2         | Black (2) | 3000                   | 34             | 8,6      |
| 139.0048.01.4000.14.2 | *MICO/48V/DALI/14°/4000°K-2 | Black (2) | 4000                   | 14             | 8,6      |
| 139.0048.01.4000.25.2 | MICO/48V/DALI/25°/4000°K-2  | Black (2) | 4000                   | 25             | 8,6      |
| 139.0048.01.4000.35.2 | *MICO/48V/DALI/35°/4000°K-2 | Black (2) | 4000                   | 34             | 8,6      |
| 139.0048.14.2         | MICO/48V/14°-2              | Black (2) | 3000                   | 14             | 8,6      |
| 139.0048.14.2700.2    | *MICO/48V/14°/2700°K-2      | Black (2) | 2700                   | 14             | 8,6      |
| 139.0048.14.4000.2    | *MICO/48V/14°/4000°K-2      | Black (2) | 4000                   | 14             | 8,6      |
| 139.0048.25.2         | MICO/48V/25°-2              | Black (2) | 3000                   | 25             | 8,6      |
| 139.0048.25.2700.2    | MICO/48V/25°/2700°K-2       | Black (2) | 2700                   | 25             | 8,6      |
| 139.0048.25.4000.2    | MICO/48V/25°/4000°K-2       | Black (2) | 4000                   | 25             | 8,6      |
| 139.0048.35.2         | MICO/48V/35°-2              | Black (2) | 3000                   | 34             | 8,6      |
| 139.0048.35.2700.2    | MICO/48V/35°/2700°K-2       | Black (2) | 2700                   | 34             | 8,6      |
| 139.0048.35.4000.2    | MICO/48V/35°/4000°K-2       | Black (2) | 4000                   | 34             | 8,6      |

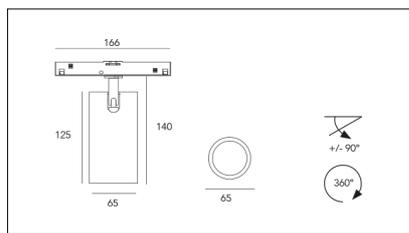

| Article code          | Article                     | Colour    | Light Temperature (°K) | Beam angle (°) | Watt (W) |
|-----------------------|-----------------------------|-----------|------------------------|----------------|----------|
| 139.0048.01.14.4      | *MICO/48V/DALI/14°-4        | White (4) | 3000                   | 14             | 8,6      |
| 139.0048.01.25.4      | MICO/48V/DALI/25°-4         | White (4) | 3000                   | 25             | 8,6      |
| 139.0048.01.2700.25.4 | MICO/48V/DALI/25°/2700°K-4  | White (4) | 2700                   | 25             | 8,6      |
| 139.0048.01.2700.35.4 | MICO/48V/DALI/35°/2700°K-4  | White (4) | 2700                   | 34             | 8,6      |
| 139.0048.01.35.4      | MICO/48V/DALI/35°-4         | White (4) | 3000                   | 34             | 8,6      |
| 139.0048.01.4000.14.4 | *MICO/48V/DALI/14°/4000°K-4 | White (4) | 4000                   | 14             | 8,6      |
| 139.0048.01.4000.25.4 | *MICO/48V/DALI/25°/4000°K-4 | White (4) | 4000                   | 25             | 8,6      |
| 139.0048.01.4000.35.4 | *MICO/48V/DALI/35°/4000°K-4 | White (4) | 4000                   | 34             | 8,6      |
| 139.0048.14.2700.4    | MICO/48V/14°/2700°K-4       | White (4) | 2700                   | 14             | 8,6      |
| 139.0048.14.4         | MICO/48V/14°-4              | White (4) | 3000                   | 14             | 8,6      |
| 139.0048.14.4000.4    | *MICO/48V/14°/4000°K-4      | White (4) | 4000                   | 14             | 8,6      |
| 139.0048.25.2700.4    | MICO/48V/25°/2700°K-4       | White (4) | 2700                   | 25             | 8,6      |
| 139.0048.25.4         | MICO/48V/25°-4              | White (4) | 3000                   | 25             | 8,6      |
| 139.0048.25.4000.4    | *MICO/48V/25°/4000°K-4      | White (4) | 4000                   | 25             | 8,6      |
| 139.0048.35.2700.4    | MICO/48V/35°/2700°K-4       | White (4) | 2700                   | 34             | 8,6      |
| 139.0048.35.4         | MICO/48V/35°-4              | White (4) | 3000                   | 34             | 8,6      |
| 139.0048.35.4000.4    | *MICO/48V/35°/4000°K-4      | White (4) | 4000                   | 34             | 8,6      |

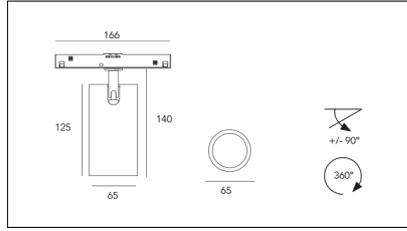


| Article code          | Article                     | Colour    | Beam angle (°) | Light Temperature (°K) | Watt (W) |
|-----------------------|-----------------------------|-----------|----------------|------------------------|----------|
| 139.0048.01.2700.14.4 | *MICO/48V/DALI/14°/2700°K-4 | White (4) | 14             | 2700                   | 8,6      |



| Article code | Name    | Description                         |
|--------------|---------|-------------------------------------|
| 139.01       | MICO/HC | Frangiluce a nido d'ape   Honeycomb |



| Article code | Name    | Description                    |
|--------------|---------|--------------------------------|
| 139.02       | MICO/CB | Schermo a croce   Cross baffle |



| Article code | Name                            | Description   | Colour    | Driver's type | Watt (W) |
|--------------|---------------------------------|---|-----------|---------------|----------|
| 1.1200EN1812 | DALIGATE 48V CASAMBI - Box Nero | Interfaccia Bluetooth-DALI compatibile con sistemi Bluetooth CASAMBI - Consumo 8W | Black (2) | CASAMBI       | 8        |