


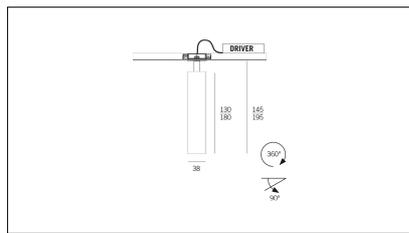




MACROLUX





Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Additional colour	Size (mm)	Watt (W)
2015.0130.05.22	TORCH/T5/130-22 8.6W 250mA 26°	Black (2)	3000	26	Black (2)	130	8,6
2015.0130.05.2700.22	TORCH/T5/130-22 8.6W 250mA 26° 2700°K	Black (2)	2700	26	Black (2)	130	8,6
2015.0130.05.4000.22	TORCH/T5/130-22 8.6W 250mA 26° 4000°K	Black (2)	4000	26	Black (2)	130	8,6
2015.0130.0510.22	TORCH/T5/130-22 8.6W 250mA 26° DALI	Black (2)	3000	26	Black (2)	130	8,6
2015.0130.0510.2700.22	TORCH/T5/130-22 8.6W 250mA 26° 2700°K DALI	Black (2)	2700	26	Black (2)	130	8,6
2015.0130.0510.4000.22	torch t5/26/4000-22#	Black (2)	4000	26	Black (2)	130	8,6

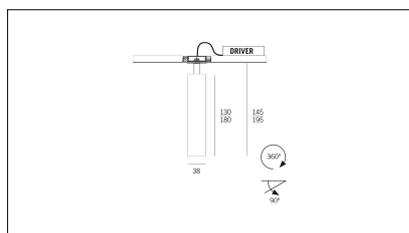



Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Additional colour	Size (mm)	Watt (W)
2015.0130.05.2700.296	TORCH/T5/130-296 8.6W 250mA 26° 2700°K	Black (2)	2700	26	Bronze (96)	130	8,6
2015.0130.05.296	TORCH/T5/130-296 8.6W 250mA 26°	Black (2)	3000	26	Bronze (96)	130	8,6
2015.0130.05.4000.296	*TORCH T5	Black (2)	4000	26	Bronze (96)	130	8,6

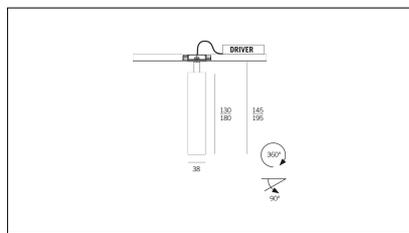



Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Additional colour	Size (mm)	Watt (W)
2015.0130.05.2700.42	TORCH/T5/130-42 8.6W 250mA 26° 2700°K	White (4)	2700	26	Black (2)	130	8,6
2015.0130.05.4000.42	*TORCH T5	White (4)	4000	26	Black (2)	130	8,6
2015.0130.05.42	TORCH/T5/130-42 8.6W 250mA 26°	White (4)	3000	26	Black (2)	130	8,6
2015.0130.0510.2700.42	TORCH/T5/130-42 8.6W 250mA 26° 2700°K DALI	White (4)	2700	26	Black (2)	130	8,6
2015.0130.0510.4000.42	torch t5/26/4000-42#	White (4)	4000	26	Black (2)	130	8,6
2015.0130.0510.42	TORCH/T5/130-42 8.6W 250mA 26° DALI	White (4)	3000	26	Black (2)	130	8,6

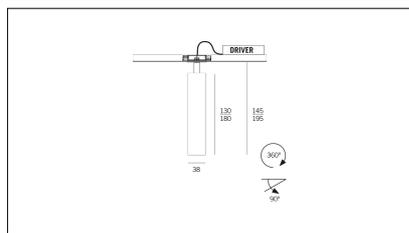



Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Additional colour	Size (mm)	Watt (W)
2015.0130.05.2700.496	TORCH/T5/130-496 8.6W 250mA 26° 2700°K	White (4)	2700	26	Bronze (96)	130	8,6
2015.0130.05.4000.496	*TORCH T5	White (4)	4000	26	Bronze (96)	130	8,6
2015.0130.05.496	TORCH/T5/130-496 8.6W 250mA 26°	White (4)	3000	26	Bronze (96)	130	8,6

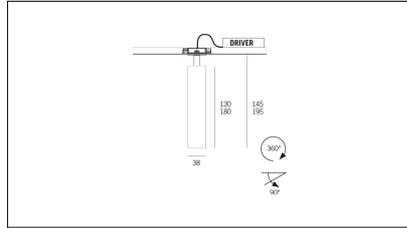

Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Additional colour	Size (mm)	Watt (W)
2015.0180.05.22	TORCH/T5/180-22 8.6W 250mA 26°	Black (2)	3000	26	Black (2)	180	8,6
2015.0180.05.2700.22	TORCH/T5/180-22 8.6W 250mA 26° 2700°K	Black (2)	2700	26	Black (2)	180	8,6
2015.0180.05.4000.22	*TORCH T5	Black (2)	4000	26	Black (2)	180	8,6
2015.0180.0510.22	TORCH/T5/180-22 8.6W 250mA 26° DALI	Black (2)	3000	26	Black (2)	180	8,6
2015.0180.0510.2700.22	torch t5/26/2700-22#	Black (2)	2700	26	Black (2)	180	8,6
2015.0180.0510.4000.22	TORCH/T5/180-22 8.6W 250mA 26° 4000°K DALI	Black (2)	4000	26	Black (2)	180	8,6


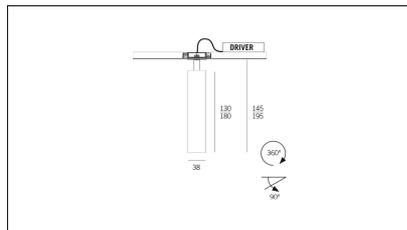


Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Additional colour	Size (mm)	Watt (W)
2015.0130.0510.2700.296	torch t5/26/2700-296#	Black (2)	2700	26	Bronze (96)	130	8,6
2015.0130.0510.296	TORCH/T5/130-296 8.6W 250mA 26° DALI	Black (2)	3000	26	Bronze (96)	130	8,6
2015.0130.0510.4000.296	torch t5/26/4000-296#	Black (2)	4000	26	Bronze (96)	130	8,6
2015.0180.05.2700.296	TORCH/T5/180-296 8.6W 250mA 26° 2700°K	Black (2)	2700	26	Bronze (96)	180	8,6
2015.0180.05.296	TORCH/T5/180-296 8.6W 250mA 26°	Black (2)	3000	26	Bronze (96)	180	8,6
2015.0180.05.4000.296	*TORCH T5	Black (2)	4000	26	Bronze (96)	180	8,6
2015.0180.0510.2700.296	TORCH/T5/180-296 8.6W 250mA 26° 2700°K DALI	Black (2)	2700	26	Bronze (96)	180	8,6
2015.0180.0510.296	torch t5/26/3000-296#	Black (2)	3000	26	Bronze (96)	180	8,6
2015.0180.0510.4000.296	torch t5/26/4000-296#	Black (2)	4000	26	Bronze (96)	180	8,6

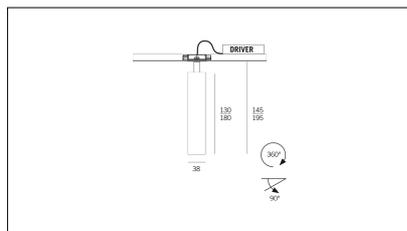


Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Additional colour	Size (mm)	Watt (W)
2015.0180.05.2700.42	TORCH/T5/180-42 8.6W 250mA 26° 2700°K	White (4)	2700	26	Black (2)	180	8,6
2015.0180.05.4000.42	TORCH/T5/180-42 8.6W 250mA 26° 4000°K	White (4)	4000	26	Black (2)	180	8,6
2015.0180.05.42	TORCH/T5/180-42 8.6W 250mA 26°	White (4)	3000	26	Black (2)	180	8,6

Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Additional colour	Size (mm)	Watt (W)
2015.0180.0510.2700.42	torch t5/26/2700-42#	White (4)	2700	26	Black (2)	180	8,6
2015.0180.0510.4000.42	torch t5/26/4000-42#	White (4)	4000	26	Black (2)	180	8,6
2015.0180.0510.42	TORCH/T5/180-42 8.6W 250mA 26° DALI	White (4)	3000	26	Black (2)	180	8,6

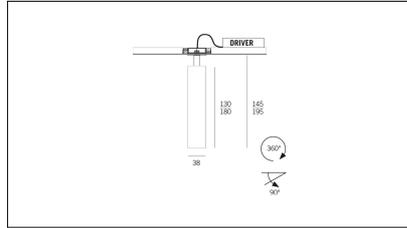

Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Additional colour	Size (mm)	Watt (W)
2015.0130.0510.2700.496	TORCH/T5/130-496 8.6W 250mA 26° 2700°K DALI	White (4)	2700	26	Bronze (96)	130	8,6
2015.0130.0510.4000.496	torch t5/26/4000-496#	White (4)	4000	26	Bronze (96)	130	8,6
2015.0130.0510.496	TORCH/T5/130-496 8.6W 250mA 26° DALI	White (4)	3000	26	Bronze (96)	130	8,6
2015.0180.05.2700.496	*TORCH T5	White (4)	2700	26	Bronze (96)	180	8,6
2015.0180.05.4000.496	*TORCH T5	White (4)	4000	26	Bronze (96)	180	8,6
2015.0180.05.496	TORCH/T5/180-496 8.6W 250mA 26°	White (4)	3000	26	Bronze (96)	180	8,6
2015.0180.0510.2700.496	torch t5/26/2700-496#	White (4)	2700	26	Bronze (96)	180	8,6
2015.0180.0510.4000.496	torch t5/26/4000-496#	White (4)	4000	26	Bronze (96)	180	8,6
2015.0180.0510.496	TORCH/T5/180-496 8.6W 250mA 26° DALI	White (4)	3000	26	Bronze (96)	180	8,6



Article code	Name	Description	Type of recessed
2015.0000	TORCH/PK	Plaster kit per proiettore ad incasso TORCH	Plasterboard