

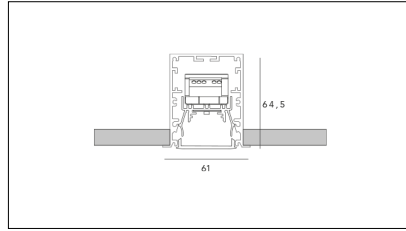



MACROLUX




| Article code | Article | Colour | Type of recessed | Diffuser | Length (mm) |
|------------------|---|------------|------------------|-----------|-------------|
| 1320.0045.00.94 | MT0_45/DO-94 L=max 3 m | White (94) | Plasterboard | Opal | |
| 1320.0045.01.94 | MT0_45/DO/3000-94 L=3m - EMPTY STANDARD | White (94) | Plasterboard | Opal | 3000 |
| 1320.00459.00.94 | MT0_45/DP-94 L=max 3 m | White (94) | Plasterboard | Prismatic | |
| 1320.00459.01.94 | MT0_45/DP/3000-94 L=3m - EMPTY STANDARD | White (94) | Plasterboard | Prismatic | 3000 |



| Article code | Name | Description | Colour |
|-----------------|---------------------|--|------------|
| 1324.5045.94 | MO_45/TC-94 | Testata di chiusura, finitura bianco - Compatibile con MX0_45 e MT0_45 | White (94) |
| 1324.5045.94.10 | MO_45/TC-94 - 10 PZ | Testata di chiusura, finitura bianco - Compatibile con MX0_45 e MT0_45 | White (94) |



| Article code | Name | Description |
|--------------|-----------------|---|
| 134.1145 | M_45/GL | Staffa di giunzione lineare - Compatibile con MX0_45, MX1_45, MT1_45 e MD_45. |
| 134.1145.10 | M_45/GL - 10 PZ | Staffa di giunzione lineare - Compatibile con MX0_45, MX1_45, MT1_45 e MD_45. |




| Article code | Name | Description |
|--------------|----------|-----------------------------|
| 1324.6045 | MO_45/SA | Staffa ancoraggio / Bracket |




| Article code | Name | Description |
|--------------|-------------|--|
| 1320.2045 | MT0_45/G090 | Connessione ad angolo orizzontale 90° / Horizontal connection corner 90° |




| Article code | Name | Description |
|--------------|-------------|--|
| 1320.3045 | MT0_45/GV90 | Connessione ad angolo verticale 90° / Vertical connection corner 90° |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|--------------|------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.300 | MKC_45/300/6,1W/700mA/3000°K | Profilo alluminio L=300 mm 6,1W 700mA 850lm 3000°K CRI>90 - Driver incluso | 6.1 | 3000 | 300 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|------------------|------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.300.4000 | MKC_45/300/6,1W/700mA/4000°K | Profilo alluminio L=300 mm 6,1W 700mA 850lm 4000°K CRI>90 - Driver incluso | 6.1 | 4000 | 300 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|----------------|------------------------------------|---|----------|------------------------|-------------|---------------|
| 1310.45.600.01 | MKC_45/600/12,2W/700mA/3000°K DALI | Profilo alluminio L=600 mm 12,2W 700mA 1700lm 3000°K CRI>90 - Driver DALI incluso | 12,2 | 3000 | 600 | DALI |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|--------------|-------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.600 | MKC_45/600/12,2W/700mA/3000°K | Profilo alluminio L=600 mm 12,2W 700mA 1700lm 3000°K CRI>90 - Driver incluso | 12,2 | 3000 | 600 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|--------------|-------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.900 | MKC_45/900/18,3W/700mA/3000°K | Profilo alluminio L=900 mm 18,3W 700mA 2550lm 3000°K CRI>90 - Driver incluso | 18,3 | 3000 | 900 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|------------------|-------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.900.4000 | MKC_45/900/18,3W/700mA/4000°K | Profilo alluminio L=900 mm 18,3W 700mA 2550lm 4000°K CRI>90 - Driver incluso | 18,3 | 4000 | 900 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|--------------|--------------------------------|---|----------|------------------------|-------------|---------------|
| 1310.45.1200 | MKC_45/1200/24,4W/700mA/3000°K | Profilo alluminio L=1200 mm 24,4W 700mA 3400lm 3000°K CRI>90 - Driver incluso | 24.4 | 3000 | 1200 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|-------------------|--------------------------------|---|----------|------------------------|-------------|---------------|
| 1310.45.1200.4000 | MKC_45/1200/24,4W/700mA/4000°K | Profilo alluminio L=1200 mm 24,4W 700mA 3400lm 4000°K CRI>90 - Driver incluso | 24.4 | 4000 | 1200 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|--------------|--------------------------------|---|----------|------------------------|-------------|---------------|
| 1310.45.1500 | MKC_45/1500/30,5W/700mA/3000°K | Profilo alluminio L=1500 mm 30,5W 700mA 4250lm 3000°K CRI>90 - Driver incluso | 30.5 | 3000 | 1500 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|-------------------|--------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.1500.4000 | MKC_45/1500/30,5W/700mA/4000°K | Profilo alluminio L=1500 mm 30,5W 700mA 4000°K CRI>90 - Driver incluso | 30,5 | 4000 | 1500 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|-----------------|-------------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.1200.01 | MKC_45/1200/24,4W/700mA/3000°K DALI | Profilo alluminio L=1200 mm 24,4W 700mA 3400lm 3000°K CRI>90 - Driver DALI incluso | 24,4 | 3000 | 1200 | DALI |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|---------------------|------------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.600.01.4000 | MKC_45/600/12,2W/700mA/4000°K DALI | Profilo alluminio L=600 mm 12,2W 700mA 4000°K CRI>90 - Driver DALI incluso | 12,2 | 4000 | 600 | DALI |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|----------------|------------------------------------|---|----------|------------------------|-------------|---------------|
| 1310.45.900.01 | MKC_45/900/18,3W/700mA/3000°K DALI | Profilo alluminio L=900 mm 18,3W 700mA 2550lm 3000°K CRI>90 - Driver DALI incluso | 18,3 | 3000 | 900 | DALI |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|---------------------|------------------------------------|---|----------|------------------------|-------------|---------------|
| 1310.45.900.01.4000 | MKC_45/900/18,3W/700mA/4000°K DALI | Profilo alluminio L=900 mm 18,3W 700mA 2550lm 4000°K CRI>90 - Driver DALI incluso | 18,3 | 4000 | 900 | DALI |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|----------------------|-------------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.1200.01.4000 | MKC_45/1200/24,4W/700mA/4000°K DALI | Profilo alluminio L=1200 mm 24,4W 700mA 3400lm 4000°K CRI>90 - Driver DALI incluso | 24,4 | 4000 | 1200 | DALI |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|-----------------|-------------------------------------|--|----------|------------------------|-------------|---------------|
| 1310.45.1500.01 | MKC_45/1500/30,5W/700mA/3000°K DALI | Profilo alluminio L=1500 mm 30,5W 700mA 4250lm 3000°K CRI>90 - Driver DALI incluso | 30.5 | 3000 | 1500 | DALI |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) | Driver's type |
|----------------------|-------------------------------------|---|----------|------------------------|-------------|---------------|
| 1310.45.1500.01.4000 | MKC_45/1500/30,5W/700mA/4000°K DALI | Profilo alluminio L=1500 mm 30,5W 700mA 4000°K CRI>90 - Driver DALI incluso | 30.5 | 4000 | 1500 | DALI |



| Article code | Name | Description | Length (mm) |
|--------------|-----------------------------------|--|-------------|
| 134.0145.01 | M_45/H/3000 L=3m - EMPTY STANDARD | Profilo alluminio H interna, serie M45 - Senza taglio a misura | 3000 |



| Article code | Name | Description |
|--------------|--|---|
| 1324.9145.01 | M_45/Diffusore Opale L=3m - EMPTY STANDARD | Profilo PC Opale / Compatibile con MX_45, MT_45, MD_45, ML_45 - Senza taglio a misura |



| Article code | Name | Description |
|---------------|---|--|
| 1324.91459.01 | M_45/Diffusore Prismatico L=3m - EMPTY STANDARD | Profilo PC Prismatico / Compatibile con MX_45, MT_45, MD_45, ML_45 - Senza taglio a misura |