


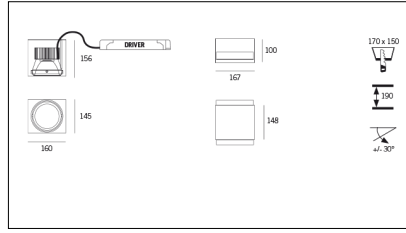


# MACROLUX




Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Watt (W)	Beam angle (°)
618.0061.01.16.2	FR1/160/LED-2 12W 350mA R16°	Black (2)	3000	Plasterboard	12	16
618.0061.01.2700.16.2	*FREE	Black (2)	2700	Plasterboard	12	16
618.0061.01.2700.32.2	FR1/160/LED-2 17W 500mA R32° 2700°K	Black (2)	2700	Plasterboard	12	38
618.0061.01.32.2	FR1/160/LED-2 12W 350mA R32°	Black (2)	3000	Plasterboard	12	38
618.0061.01.4000.16.2	*FREE	Black (2)	4000	Plasterboard	12	16
618.0061.01.4000.32.2	*FREE	Black (2)	4000	Plasterboard	12	38
618.0061.02.16.2	FR1/160/LED-2 17W 500mA R16°	Black (2)	3000	Plasterboard	17	16
618.0061.02.2700.16.2	*FREE	Black (2)	2700	Plasterboard	17	16
618.0061.02.2700.32.2	*FREE	Black (2)	2700	Plasterboard	17	38
618.0061.02.32.2	FR1/160/LED-2 17W 500mA R32°	Black (2)	3000	Plasterboard	17	38
618.0061.02.4000.16.2	FR1/160/LED-2 17W 500mA R16° 4000°K	Black (2)	4000	Plasterboard	17	16
618.0061.02.4000.32.2	FR1/160/LED-2 17W 500mA R32° 4000°K	Black (2)	4000	Plasterboard	17	38
618.0061.03.16.2	*FREE	Black (2)	3000	Plasterboard	17	16
618.0061.03.2700.16.2	*FREE	Black (2)	2700	Plasterboard	17	16
618.0061.03.2700.32.2	FR1/160/LED-2 17W max 500mA R32° 2700°K	Black (2)	2700	Plasterboard	17	38
618.0061.03.32.2	FR1/160/LED-2 17W max 500mA R32°	Black (2)	3000	Plasterboard	17	38
618.0061.03.4000.16.2	*FREE	Black (2)	4000	Plasterboard	17	16
618.0061.03.4000.32.2	*FREE	Black (2)	4000	Plasterboard	17	38
618.0061.08.16.2	*FREE	Black (2)	3000	Plasterboard	17	16
618.0061.08.2700.16.2	*FREE	Black (2)	2700	Plasterboard	17	16
618.0061.08.2700.32.2	*FREE	Black (2)	2700	Plasterboard	17	38
618.0061.08.32.2	FR1/160/LED-2 17W 500mA R32° DALI	Black (2)	3000	Plasterboard	17	38
618.0061.08.4000.16.2	*FREE	Black (2)	4000	Plasterboard	17	16
618.0061.08.4000.32.2	FR1/160/LED-2 17W 500mA R32° 4000°K DALI	Black (2)	4000	Plasterboard	17	38

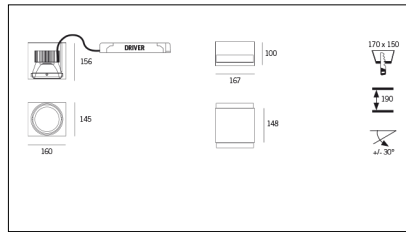


Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Watt (W)	Beam angle (°)
618.0061.01.16.4	*FREE	White (4)	3000	Plasterboard	12	16
618.0061.01.2700.16.4	*FREE	White (4)	2700	Plasterboard	12	16
618.0061.01.2700.32.4	*FREE	White (4)	2700	Plasterboard	12	38
618.0061.01.32.4	FR1/160/LED-4 12W 350mA R32°	White (4)	3000	Plasterboard	12	38
618.0061.01.4000.16.4	*FREE	White (4)	4000	Plasterboard	12	16
618.0061.01.4000.32.4	*FREE	White (4)	4000	Plasterboard	12	38
618.0061.02.16.4	FR1/160/LED-4 17W 500mA R16°	White (4)	3000	Plasterboard	17	16
618.0061.02.2700.16.4	*FREE	White (4)	2700	Plasterboard	17	16
618.0061.02.2700.32.4	FR1/160/LED-4 17W 500mA R32° 2700°K	White (4)	2700	Plasterboard	17	38
618.0061.02.32.4	FR1/160/LED-4 17W 500mA R32°	White (4)	3000	Plasterboard	17	38
618.0061.02.4000.16.4	*FREE	White (4)	4000	Plasterboard	17	16
618.0061.02.4000.32.4	FR1/160/LED-4 17W 500mA R32° 4000°K	White (4)	4000	Plasterboard	17	38
618.0061.03.16.4	FR1/160/LED-4 17W max 500mA R16°	White (4)	3000	Plasterboard	17	16
618.0061.03.2700.16.4	*FREE	White (4)	2700	Plasterboard	17	16
618.0061.03.2700.32.4	*FREE	White (4)	2700	Plasterboard	17	38

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Watt (W)	Beam angle (°)
618.0061.03.32.4	*FREE	White (4)	3000	Plasterboard	17	38
618.0061.03.4000.16.4	*FREE	White (4)	4000	Plasterboard	17	16
618.0061.03.4000.32.4	*FREE	White (4)	4000	Plasterboard	17	38
618.0061.08.16.4	*FREE	White (4)	3000	Plasterboard	17	16
618.0061.08.2700.16.4	*FREE	White (4)	2700	Plasterboard	17	16
618.0061.08.2700.32.4	FR1/160/LED-4 17W 500mA R32° 2700°K DALI	White (4)	2700	Plasterboard	17	38
618.0061.08.32.4	*FREE	White (4)	3000	Plasterboard	17	38
618.0061.08.4000.16.4	*FREE	White (4)	4000	Plasterboard	17	16
618.0061.08.4000.32.4	FR1/160/LED-4 17W 500mA R32° 4000°K DALI	White (4)	4000	Plasterboard	17	38



Article code	Name	Description	Colour	Type of recessed
618.0030.2	FFF1/160-2	Frame for Free 1 AR struttura per l'esecuzione del foro su cartongesso - foro: 170 x 150 mm	Black (2)	Plasterboard



Article code	Name	Description	Colour	Type of recessed
618.0030.4	FFF1/160-4	Frame for Free 1 AR struttura per l'esecuzione del foro su cartongesso - foro: 170 x 150 mm	White (4)	Plasterboard