


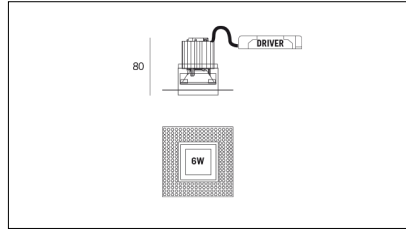




# MACROLUX





Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Watt (W)	Beam angle (°)
1917.0009.01.20.4	SQUA50/FILO/LED-4 6W 350mA 20°	White (4)	3000	Plasterboard	6,1	25
1917.0009.01.2700.20.4	*SQUADRON 50	White (4)	2700	Plasterboard	6,1	25
1917.0009.01.2700.40.4	SQUA50/FILO/LED-4 6W 350mA 40° 2700°K	White (4)	2700	Plasterboard	6,1	34
1917.0009.01.40.4	SQUA50/FILO/LED-4 6W 350mA 40°	White (4)	3000	Plasterboard	6,1	34
1917.0009.01.4000.20.4	*SQUADRON 50	White (4)	4000	Plasterboard	6,1	25
1917.0009.01.4000.40.4	*SQUADRON 50	White (4)	4000	Plasterboard	6,1	34
1917.0013.01.20.4	SQUA50/FILO/PK-4 6W 350mA 20°	White (4)	3000	Bricks	6,1	25
1917.0013.01.2700.20.4	SQUA50/FILO/PK-4 6W 350mA 20° 2700°K	White (4)	2700	Bricks	6,1	25
1917.0013.01.2700.40.4	SQUADRON 50 FILO	White (4)	2700	Bricks	6,1	34
1917.0013.01.40.4	SQUA50/FILO/PK-4 6W 350mA 40°	White (4)	3000	Bricks	6,1	34
1917.0013.01.4000.20.4	SQUADRON 50 FILO	White (4)	4000	Bricks	6,1	25
1917.0013.01.4000.40.4	SQUADRON 50 FILO	White (4)	4000	Bricks	6,1	34
1917.0013.03.20.4	SQUADRON 50 FILO	White (4)	3000	Bricks	6,1	25
1917.0013.03.2700.20.4	SQUADRON 50 FILO	White (4)	2700	Bricks	6,1	25
1917.0013.03.2700.40.4	SQUADRON 50 FILO	White (4)	2700	Bricks	6,1	34
1917.0013.03.40.4	SQUADRON 50 FILO	White (4)	3000	Bricks	6,1	34
1917.0013.03.4000.20.4	SQUADRON 50 FILO	White (4)	4000	Bricks	6,1	25
1917.0013.03.4000.40.4	SQUADRON 50 FILO	White (4)	4000	Bricks	6,1	34

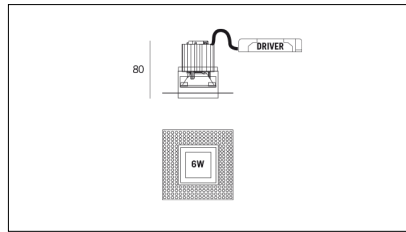


Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Watt (W)	Beam angle (°)
1917.0009.01.20.2	SQUA50/FILO/LED-2 6W 350mA 20°	Black (2)	3000	Plasterboard	6,1	25
1917.0009.01.2700.20.2	*SQUADRON 50	Black (2)	2700	Plasterboard	6,1	25
1917.0009.01.2700.40.2	*SQUADRON 50	Black (2)	2700	Plasterboard	6,1	34
1917.0009.01.40.2	SQUA50/FILO/LED-2 6W 350mA 40°	Black (2)	3000	Plasterboard	6,1	34
1917.0009.01.4000.20.2	*SQUADRON 50	Black (2)	4000	Plasterboard	6,1	25
1917.0009.01.4000.40.2	SQUA50/FILO/LED-2 6W 350mA 40° 4000°K	Black (2)	4000	Plasterboard	6,1	34
1917.0013.01.20.2	SQUA50/FILO/PK-LED-2 6,6W 350mA 20°	Black (2)	3000	Bricks	6,1	25
1917.0013.01.2700.20.2	SQUADRON 50 FILO	Black (2)	2700	Bricks	6,1	25
1917.0013.01.2700.40.2	SQUADRON 50 FILO	Black (2)	2700	Bricks	6,1	34
1917.0013.01.40.2	*SQUADRON 50	Black (2)	3000	Bricks	6,1	34
1917.0013.01.4000.20.2	SQUADRON 50 FILO	Black (2)	4000	Bricks	6,1	25
1917.0013.01.4000.40.2	SQUADRON 50 FILO	Black (2)	4000	Bricks	6,1	34
1917.0013.03.20.2	SQUADRON 50 FILO	Black (2)	3000	Bricks	6,1	25
1917.0013.03.2700.20.2	SQUADRON 50 FILO	Black (2)	2700	Bricks	6,1	25
1917.0013.03.2700.40.2	SQUADRON 50 FILO	Black (2)	2700	Bricks	6,1	34
1917.0013.03.40.2	SQUADRON 50 FILO	Black (2)	3000	Bricks	6,1	34
1917.0013.03.4000.20.2	SQUADRON 50 FILO	Black (2)	4000	Bricks	6,1	25
1917.0013.03.4000.40.2	SQUADRON 50 FILO	Black (2)	4000	Bricks	6,1	34

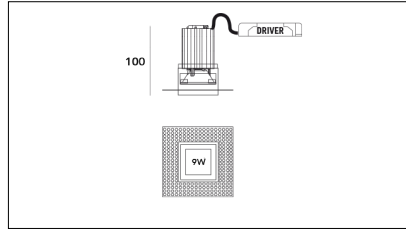

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Watt (W)	Beam angle (°)
1917.0009.02.20.4	SQUA50/FILO/LED-4 9W 500mA 20°	White (4)	3000	Plasterboard	8,9	25
1917.0009.02.2700.20.4	*SQUADRON 50	White (4)	2700	Plasterboard	8,9	25
1917.0009.02.2700.34.4	SQUA50/FILO/LED-4 9W 500mA 40° 2700°K	White (4)	2700	Plasterboard	8,9	34
1917.0009.02.34.4	SQUA50/FILO/LED-4 9W 500mA 40°	White (4)	3000	Plasterboard	8,9	34
1917.0009.02.4000.20.4	SQUA50/FILO/LED-4 9W 500mA 20° 4000°K	White (4)	4000	Plasterboard	8,9	25
1917.0009.02.4000.34.4	*SQUADRON 50	White (4)	4000	Plasterboard	8,9	34
1917.0009.03.20.4	SQUA50/FILO/LED-2 9W max 500mA 20°	White (4)	3000	Plasterboard	8,9	25
1917.0009.03.2700.20.4	*SQUADRON 50	White (4)	2700	Plasterboard	8,9	25
1917.0009.03.2700.34.4	*SQUADRON 50	White (4)	2700	Plasterboard	8,9	34
1917.0009.03.34.4	SQUA50/FILO/LED-4 9W max 500mA 40°	White (4)	3000	Plasterboard	8,9	34
1917.0009.03.4000.20.4	*SQUADRON 50	White (4)	4000	Plasterboard	8,9	25
1917.0009.03.4000.34.4	*SQUADRON 50	White (4)	4000	Plasterboard	8,9	34
1917.0009.08.20.4	SQUA50/FILO/LED-4 9W 500mA 20° DALI	White (4)	3000	Plasterboard	8,9	25
1917.0009.08.2700.20.4	*SQUADRON 50	White (4)	2700	Plasterboard	8,9	25
1917.0009.08.2700.34.4	*SQUADRON 50	White (4)	2700	Plasterboard	8,9	34
1917.0009.08.34.4	SQUA50/FILO/LED-4 9W 500mA 40° DALI	White (4)	3000	Plasterboard	8,9	34
1917.0009.08.4000.20.4	*SQUADRON 50	White (4)	4000	Plasterboard	8,9	25
1917.0009.08.4000.34.4	SQUA50/FILO/LED-4 9W 500mA 40° 4000°K DALI	White (4)	4000	Plasterboard	8,9	34

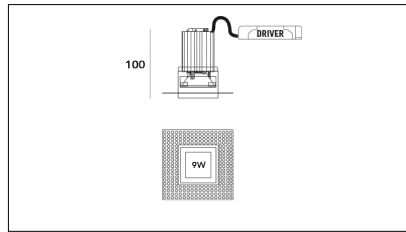

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Watt (W)	Beam angle (°)
1917.0009.02.20.2	SQUA50/FILO/LED-2 9W 500mA 20°	Black (2)	3000	Plasterboard	8,9	25
1917.0009.02.2700.20.2	SQUA50/FILO/LED-2 9W 500mA 20° 2700°K	Black (2)	2700	Plasterboard	8,9	25
1917.0009.02.2700.34.2	SQUA50/FILO/LED-2 9W 500mA 40° 2700°K	Black (2)	2700	Plasterboard	8,9	34
1917.0009.02.34.2	SQUA50/FILO/LED-2 9W 500mA 40°	Black (2)	3000	Plasterboard	8,9	34
1917.0009.02.4000.20.2	*SQUADRON 50	Black (2)	4000	Plasterboard	8,9	25
1917.0009.02.4000.34.2	SQUA50/FILO/LED-2 9W 500mA 40° 4000°K	Black (2)	4000	Plasterboard	8,9	34
1917.0009.03.20.2	*SQUADRON 50	Black (2)	3000	Plasterboard	8,9	25
1917.0009.03.2700.20.2	*SQUADRON 50	Black (2)	2700	Plasterboard	8,9	25
1917.0009.03.2700.34.2	SQUA50/FILO/LED-2 9W max 500mA 40° 2700°K	Black (2)	2700	Plasterboard	8,9	34
1917.0009.03.34.2	*SQUADRON 50	Black (2)	3000	Plasterboard	8,9	34
1917.0009.03.4000.20.2	*SQUADRON 50	Black (2)	4000	Plasterboard	8,9	25
1917.0009.03.4000.34.2	*SQUADRON 50	Black (2)	4000	Plasterboard	8,9	34
1917.0009.08.20.2	*SQUADRON 50	Black (2)	3000	Plasterboard	8,9	25
1917.0009.08.2700.20.2	*SQUADRON 50	Black (2)	2700	Plasterboard	8,9	25
1917.0009.08.2700.34.2	*SQUADRON 50	Black (2)	2700	Plasterboard	8,9	34
1917.0009.08.4000.20.2	*SQUADRON 50	Black (2)	4000	Plasterboard	8,9	25
1917.0009.08.4000.34.2	SQUA50/FILO/LED-2 9W 500mA 40° 4000°K DALI	Black (2)	4000	Plasterboard	8,9	34



Article code	Name	Description
1917.0010.AC	SQUA50/GL-AC	Vetro di protezione satinato/frosted protection glass