


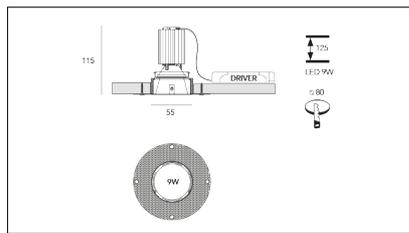




# MACROLUX





Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.1001.02.20.2	RF50/LED-2 8.6W 500mA 25°	Black (2)	3000	Plasterboard	25	8,6
18.1001.02.2700.20.2	RF50/LED-2 8.6W 500mA 25° 2700°K	Black (2)	2700	Plasterboard	25	8,6
18.1001.02.2700.34.2	RF50/LED-2 8.6W 500mA 34° 2700°K	Black (2)	2700	Plasterboard	34	8,6
18.1001.02.34.2	RF50/LED-2 8.6W 500mA 34°	Black (2)	3000	Plasterboard	34	8,6
18.1001.02.4000.20.2	*RF_50	Black (2)	4000	Plasterboard	25	8,6
18.1001.02.4000.34.2	RF50/LED-2 8.6W 500mA 34° 4000°K	Black (2)	4000	Plasterboard	34	8,6
18.1001.03.20.2	RF50/LED-2 8.6W max 500mA 25°	Black (2)	3000	Plasterboard	25	8,6
18.1001.03.2700.20.2	*RF_50	Black (2)	2700	Plasterboard	25	8,6
18.1001.03.2700.34.2	RF50/LED-2 8.6W max 500mA 34° 2700°K	Black (2)	2700	Plasterboard	34	8,6
18.1001.03.34.2	RF50/LED-2 8.6W max 500mA 34°	Black (2)	3000	Plasterboard	34	8,6
18.1001.03.4000.20.2	RF50/LED-2 8.6W max 500mA 25° 4000°K	Black (2)	4000	Plasterboard	25	8,6
18.1001.03.4000.34.2	*RF_50	Black (2)	4000	Plasterboard	34	8,6
18.1001.08.20.2	RF50/LED-2 8.6W 500mA 25° DALI	Black (2)	3000	Plasterboard	25	8,6
18.1001.08.2700.20.2	RF50/LED-2 8.6W 500mA 25° 2700°K DALI	Black (2)	2700	Plasterboard	25	8,6
18.1001.08.2700.34.2	RF50/LED-2 8.6W 500mA 34° 2700°K DALI	Black (2)	2700	Plasterboard	34	8,6
18.1001.08.34.2	RF50/LED-2 8.6W 500mA 34° DALI	Black (2)	3000	Plasterboard	34	8,6
18.1001.08.4000.20.2	RF50/LED-2 8.6W 500mA 25° 4000°K DALI	Black (2)	4000	Plasterboard	25	8,6
18.1001.08.4000.34.2	*RF_50	Black (2)	4000	Plasterboard	34	8,6

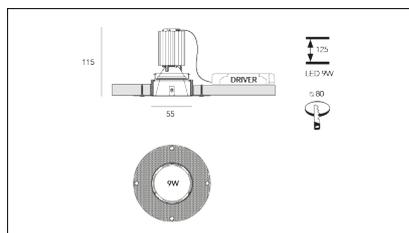


Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.1001.02.20.4	RF50/LED-4 8.6W 500mA 25°	White (4)	3000	Plasterboard	25	8,6
18.1001.02.2700.20.4	RF50/LED-4 8.6W 500mA 25° 2700°K	White (4)	2700	Plasterboard	25	8,6
18.1001.02.2700.34.4	RF50/LED-4 8.6W 500mA 34° 2700°K	White (4)	2700	Plasterboard	34	8,6
18.1001.02.34.4	RF50/LED-4 8.6W 500mA 34°	White (4)	3000	Plasterboard	34	8,6
18.1001.02.4000.20.4	RF50/LED-4 8.6W 500mA 25° 4000°K	White (4)	4000	Plasterboard	25	8,6
18.1001.02.4000.34.4	*RF_50	White (4)	4000	Plasterboard	34	8,6
18.1001.03.20.4	RF50/LED-4 8.6W max 500mA 25°	White (4)	3000	Plasterboard	25	8,6
18.1001.03.2700.20.4	RF50/LED-4 8.6W max 500mA 25° 2700°K	White (4)	2700	Plasterboard	25	8,6
18.1001.03.2700.34.4	RF50/LED-4 8.6W max 500mA 34° 2700°K	White (4)	2700	Plasterboard	34	8,6
18.1001.03.34.4	RF50/LED-4 8.6W max 500mA 34°	White (4)	3000	Plasterboard	34	8,6
18.1001.03.4000.20.4	*RF_50	White (4)	4000	Plasterboard	25	8,6
18.1001.03.4000.34.4	*RF_50	White (4)	4000	Plasterboard	34	8,6
18.1001.08.20.4	RF50/LED-4 8.6W 500mA 25° DALI	White (4)	3000	Plasterboard	25	8,6
18.1001.08.2700.20.4	RF50/LED-4 8.6W 500mA 25° 2700°K DALI	White (4)	2700	Plasterboard	25	8,6
18.1001.08.2700.34.4	RF50/LED-4 8.6W 500mA 34° 2700°K DALI	White (4)	2700	Plasterboard	34	8,6
18.1001.08.34.4	RF50/LED-4 8.6W 500mA 34° DALI	White (4)	3000	Plasterboard	34	8,6
18.1001.08.4000.20.4	RF50/LED-4 8.6W 500mA 25° 4000°K DALI	White (4)	4000	Plasterboard	25	8,6
18.1001.08.4000.34.4	*RF_50	White (4)	4000	Plasterboard	34	8,6

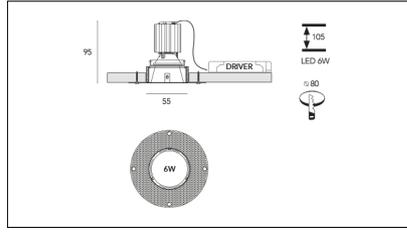

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.1001.01.14.2	*RF50/LED-2 5.8W 350mA 14°	Black (2)	3000	Plasterboard	14	5,8
18.1001.01.20.2	RF50/LED-2 5.8W 350mA 25°	Black (2)	3000	Plasterboard	25	5,8
18.1001.01.2700.20.2	RF50/LED-2 5.8W 350mA 25° 2700°K	Black (2)	2700	Plasterboard	25	5,8
18.1001.01.2700.40.2	RF50/LED-2 5.8W 350mA 34° 2700°K	Black (2)	2700	Plasterboard	34	5,8
18.1001.01.40.2	RF50/LED-2 5.8W 350mA 34°	Black (2)	3000	Plasterboard	34	5,8
18.1001.01.4000.20.2	*RF_50	Black (2)	4000	Plasterboard	25	5,8
18.1001.01.4000.40.2	*RF_50	Black (2)	4000	Plasterboard	34	5,8

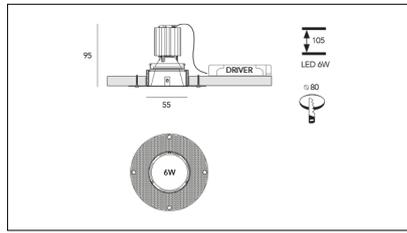

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.1001.01.20.4	RF50/LED-4 5.8W 350mA 25°	White (4)	3000	Plasterboard	25	5,8
18.1001.01.2700.20.4	RF50/LED-4 5.8W 350mA 25° 2700°K	White (4)	2700	Plasterboard	25	5,8
18.1001.01.2700.40.4	RF50/LED-4 5.8W 350mA 34° 2700°K	White (4)	2700	Plasterboard	34	5,8
18.1001.01.40.4	RF50/LED-4 5.8W 350mA 34°	White (4)	3000	Plasterboard	34	5,8
18.1001.01.4000.20.4	*RF_50	White (4)	4000	Plasterboard	25	5,8
18.1001.01.4000.40.4	RF50/LED-4 5.8W 350mA 34° 4000°K	White (4)	4000	Plasterboard	34	5,8



Article code	Name	Description
18.1001.PK	RF50/PK	Plaster kit per proiettore ad incasso RF50