


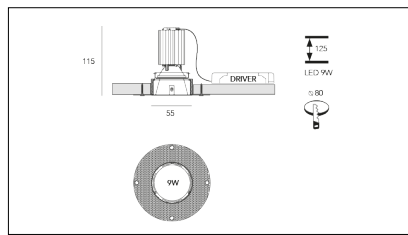




MACROLUX





Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.1001.02.20.2	RF50/LED-2 9W 500mA 25°	Black (2)	3000	Plasterboard	25	8,9
18.1001.02.2700.20.2	RF50/LED-2 9W 500mA 25° 2700°K	Black (2)	2700	Plasterboard	25	8,9
18.1001.02.2700.34.2	RF50/LED-2 9W 500mA 35° 2700°K	Black (2)	2700	Plasterboard	34	8,9
18.1001.02.34.2	RF50/LED-2 9W 500mA 35°	Black (2)	3000	Plasterboard	34	8,9
18.1001.02.4000.20.2	*RF_50	Black (2)	4000	Plasterboard	25	8,9
18.1001.02.4000.34.2	RF50/LED-2 9W 500mA 35° 4000°K	Black (2)	4000	Plasterboard	34	8,9
18.1001.03.20.2	RF50/LED-2 9W max 500mA 25°	Black (2)	3000	Plasterboard	25	8,9
18.1001.03.2700.20.2	*RF_50	Black (2)	2700	Plasterboard	25	8,9
18.1001.03.2700.34.2	RF50/LED-2 9W max 500mA 35° 2700°K	Black (2)	2700	Plasterboard	34	8,9
18.1001.03.34.2	RF50/LED-2 9W max 500mA 35°	Black (2)	3000	Plasterboard	34	8,9
18.1001.03.4000.20.2	RF50/LED-2 9W max 500mA 25° 4000°K	Black (2)	4000	Plasterboard	25	8,9
18.1001.03.4000.34.2	*RF_50	Black (2)	4000	Plasterboard	34	8,9
18.1001.08.20.2	RF50/LED-2 9W 500mA 25° DALI	Black (2)	3000	Plasterboard	25	8,9
18.1001.08.2700.20.2	RF50/LED-2 9W 500mA 25° 2700°K DALI	Black (2)	2700	Plasterboard	25	8,9
18.1001.08.2700.34.2	RF50/LED-2 9W 500mA 35° 2700°K DALI	Black (2)	2700	Plasterboard	34	8,9
18.1001.08.34.2	RF50/LED-2 9W 500mA 35° DALI	Black (2)	3000	Plasterboard	34	8,9
18.1001.08.4000.20.2	RF50/LED-2 9W 500mA 25° 4000°K DALI	Black (2)	4000	Plasterboard	25	8,9
18.1001.08.4000.34.2	*RF_50	Black (2)	4000	Plasterboard	34	8,9

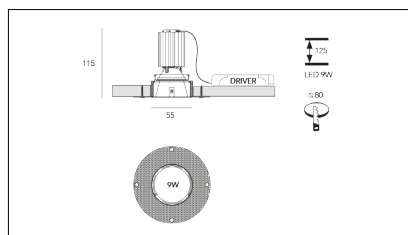


Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.1001.02.20.4	RF50/LED-4 9W 500mA 25°	White (4)	3000	Plasterboard	25	8,9
18.1001.02.2700.20.4	RF50/LED-4 9W 500mA 25° 2700°K	White (4)	2700	Plasterboard	25	8,9
18.1001.02.2700.34.4	RF50/LED-4 9W 500mA 35° 2700°K	White (4)	2700	Plasterboard	34	8,9
18.1001.02.34.4	RF50/LED-4 9W 500mA 35°	White (4)	3000	Plasterboard	34	8,9
18.1001.02.4000.20.4	RF50/LED-4 9W 500mA 25° 4000°K	White (4)	4000	Plasterboard	25	8,9
18.1001.02.4000.34.4	*RF_50	White (4)	4000	Plasterboard	34	8,9
18.1001.03.20.4	RF50/LED-4 9W max 500mA 25°	White (4)	3000	Plasterboard	25	8,9
18.1001.03.2700.20.4	RF50/LED-4 9W max 500mA 25° 2700°K	White (4)	2700	Plasterboard	25	8,9
18.1001.03.2700.34.4	RF50/LED-4 9W max 500mA 35° 2700°K	White (4)	2700	Plasterboard	34	8,9
18.1001.03.34.4	RF50/LED-4 9W max 500mA 35°	White (4)	3000	Plasterboard	34	8,9
18.1001.03.4000.20.4	*RF_50	White (4)	4000	Plasterboard	25	8,9
18.1001.03.4000.34.4	*RF_50	White (4)	4000	Plasterboard	34	8,9
18.1001.08.20.4	RF50/LED-4 9W 500mA 25° DALI	White (4)	3000	Plasterboard	25	8,9
18.1001.08.2700.20.4	RF50/LED-4 9W 500mA 25° 2700°K DALI	White (4)	2700	Plasterboard	25	8,9
18.1001.08.2700.34.4	RF50/LED-4 9W 500mA 35° 2700°K DALI	White (4)	2700	Plasterboard	34	8,9
18.1001.08.34.4	RF50/LED-4 9W 500mA 35° DALI	White (4)	3000	Plasterboard	34	8,9
18.1001.08.4000.20.4	RF50/LED-4 8.6W 500mA 25° 4000°K DALI	White (4)	4000	Plasterboard	25	8,9
18.1001.08.4000.34.4	*RF_50	White (4)	4000	Plasterboard	34	8,9

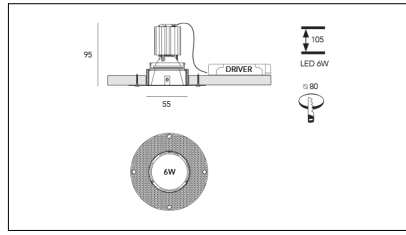

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.1001.01.14.2	*RF50/LED-2 6W 350mA 14°	Black (2)	3000	Plasterboard	14	6,1
18.1001.01.20.2	RF50/LED-2 6W 350mA 25°	Black (2)	3000	Plasterboard	25	6,1
18.1001.01.2700.20.2	*RF_50	Black (2)	2700	Plasterboard	25	6,1
18.1001.01.2700.40.2	RF50/LED-2 6W 350mA 35° 2700°K	Black (2)	2700	Plasterboard	34	6,1
18.1001.01.40.2	RF50/LED-2 6W 350mA 35°	Black (2)	3000	Plasterboard	34	6,1
18.1001.01.4000.20.2	*RF_50	Black (2)	4000	Plasterboard	25	6,1
18.1001.01.4000.40.2	*RF_50	Black (2)	4000	Plasterboard	34	6,1

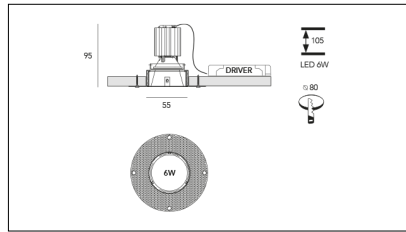

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.1001.01.20.4	RF50/LED-4 6W 350mA 25°	White (4)	3000	Plasterboard	25	6,1
18.1001.01.2700.20.4	RF50/LED-4 6W 350mA 25° 2700°K	White (4)	2700	Plasterboard	25	6,1
18.1001.01.2700.40.4	RF50/LED-4 6W 350mA 35° 2700°K	White (4)	2700	Plasterboard	34	6,1
18.1001.01.40.4	RF50/LED-4 6W 350mA 35°	White (4)	3000	Plasterboard	34	6,1
18.1001.01.4000.20.4	*RF_50	White (4)	4000	Plasterboard	25	6,1
18.1001.01.4000.40.4	RF50/LED-4 6W 350mA 35° 4000°K	White (4)	4000	Plasterboard	34	6,1



Article code	Name	Description
18.1001.PK	RF50/PK	Plaster kit per proiettore ad incasso RF50