


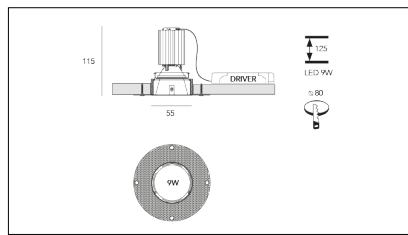




MACROLUX





Codice Articolo	Articolo	Colore	Temperatura Luce (°K)	Tipo di incasso	Emissione (°)	Potenza (W)
18.1001.02.20.2	RF50/LED-2 8.6W 500mA 25°	Nero (2)	3000	Cartongesso	25	8,6
18.1001.02.2700.20.2	RF50/LED-2 8.6W 500mA 25° 2700°K	Nero (2)	2700	Cartongesso	25	8,6
18.1001.02.2700.34.2	RF50/LED-2 8.6W 500mA 34° 2700°K	Nero (2)	2700	Cartongesso	34	8,6
18.1001.02.34.2	RF50/LED-2 8.6W 500mA 34°	Nero (2)	3000	Cartongesso	34	8,6
18.1001.02.4000.20.2	*RF_50	Nero (2)	4000	Cartongesso	25	8,6
18.1001.02.4000.34.2	RF50/LED-2 8.6W 500mA 34° 4000°K	Nero (2)	4000	Cartongesso	34	8,6
18.1001.03.20.2	RF50/LED-2 8.6W max 500mA 25°	Nero (2)	3000	Cartongesso	25	8,6
18.1001.03.2700.20.2	*RF_50	Nero (2)	2700	Cartongesso	25	8,6
18.1001.03.2700.34.2	RF50/LED-2 8.6W max 500mA 34° 2700°K	Nero (2)	2700	Cartongesso	34	8,6
18.1001.03.34.2	RF50/LED-2 8.6W max 500mA 34°	Nero (2)	3000	Cartongesso	34	8,6
18.1001.03.4000.20.2	RF50/LED-2 8.6W max 500mA 25° 4000°K	Nero (2)	4000	Cartongesso	25	8,6
18.1001.03.4000.34.2	*RF_50	Nero (2)	4000	Cartongesso	34	8,6
18.1001.08.20.2	RF50/LED-2 8.6W 500mA 25° DALI	Nero (2)	3000	Cartongesso	25	8,6
18.1001.08.2700.20.2	RF50/LED-2 8.6W 500mA 25° 2700°K DALI	Nero (2)	2700	Cartongesso	25	8,6
18.1001.08.2700.34.2	RF50/LED-2 8.6W 500mA 34° 2700°K DALI	Nero (2)	2700	Cartongesso	34	8,6
18.1001.08.34.2	RF50/LED-2 8.6W 500mA 34° DALI	Nero (2)	3000	Cartongesso	34	8,6
18.1001.08.4000.20.2	RF50/LED-2 8.6W 500mA 25° 4000°K DALI	Nero (2)	4000	Cartongesso	25	8,6
18.1001.08.4000.34.2	*RF_50	Nero (2)	4000	Cartongesso	34	8,6

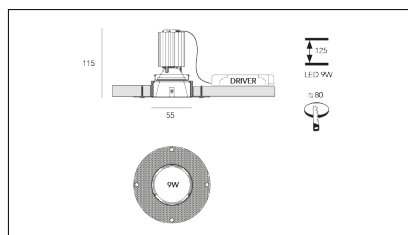


Codice Articolo	Articolo	Colore	Temperatura Luce (°K)	Tipo di incasso	Emissione (°)	Potenza (W)
18.1001.02.20.4	RF50/LED-4 8.6W 500mA 25°	Bianco (4)	3000	Cartongesso	25	8,6
18.1001.02.2700.20.4	RF50/LED-4 8.6W 500mA 25° 2700°K	Bianco (4)	2700	Cartongesso	25	8,6
18.1001.02.2700.34.4	RF50/LED-4 8.6W 500mA 34° 2700°K	Bianco (4)	2700	Cartongesso	34	8,6
18.1001.02.34.4	RF50/LED-4 8.6W 500mA 34°	Bianco (4)	3000	Cartongesso	34	8,6
18.1001.02.4000.20.4	RF50/LED-4 8.6W 500mA 25° 4000°K	Bianco (4)	4000	Cartongesso	25	8,6
18.1001.02.4000.34.4	*RF_50	Bianco (4)	4000	Cartongesso	34	8,6
18.1001.03.20.4	RF50/LED-4 8.6W max 500mA 25°	Bianco (4)	3000	Cartongesso	25	8,6
18.1001.03.2700.20.4	RF50/LED-4 8.6W max 500mA 25° 2700°K	Bianco (4)	2700	Cartongesso	25	8,6
18.1001.03.2700.34.4	RF50/LED-4 8.6W max 500mA 34° 2700°K	Bianco (4)	2700	Cartongesso	34	8,6
18.1001.03.34.4	RF50/LED-4 8.6W max 500mA 34°	Bianco (4)	3000	Cartongesso	34	8,6
18.1001.03.4000.20.4	*RF_50	Bianco (4)	4000	Cartongesso	25	8,6
18.1001.03.4000.34.4	*RF_50	Bianco (4)	4000	Cartongesso	34	8,6
18.1001.08.20.4	RF50/LED-4 8.6W 500mA 25° DALI	Bianco (4)	3000	Cartongesso	25	8,6
18.1001.08.2700.20.4	RF50/LED-4 8.6W 500mA 25° 2700°K DALI	Bianco (4)	2700	Cartongesso	25	8,6
18.1001.08.2700.34.4	RF50/LED-4 8.6W 500mA 34° 2700°K DALI	Bianco (4)	2700	Cartongesso	34	8,6
18.1001.08.34.4	RF50/LED-4 8.6W 500mA 34° DALI	Bianco (4)	3000	Cartongesso	34	8,6
18.1001.08.4000.20.4	RF50/LED-4 8.6W 500mA 25° 4000°K DALI	Bianco (4)	4000	Cartongesso	25	8,6
18.1001.08.4000.34.4	*RF_50	Bianco (4)	4000	Cartongesso	34	8,6

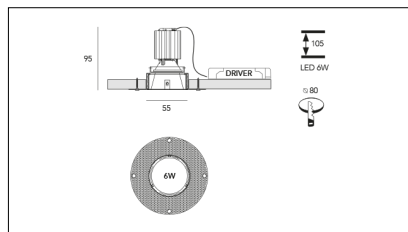

Codice Articolo	Articolo	Colore	Temperatura Luce (°K)	Tipo di incasso	Emissione (°)	Potenza (W)
18.1001.01.14.2	*RF50/LED-2 5.8W 350mA 14°	Nero (2)	3000	Cartongesso	14	5,8
18.1001.01.20.2	RF50/LED-2 5.8W 350mA 25°	Nero (2)	3000	Cartongesso	25	5,8
18.1001.01.2700.20.2	RF50/LED-2 5.8W 350mA 25° 2700°K	Nero (2)	2700	Cartongesso	25	5,8
18.1001.01.2700.40.2	RF50/LED-2 5.8W 350mA 34° 2700°K	Nero (2)	2700	Cartongesso	34	5,8
18.1001.01.40.2	RF50/LED-2 5.8W 350mA 34°	Nero (2)	3000	Cartongesso	34	5,8
18.1001.01.4000.20.2	*RF_50	Nero (2)	4000	Cartongesso	25	5,8
18.1001.01.4000.40.2	*RF_50	Nero (2)	4000	Cartongesso	34	5,8

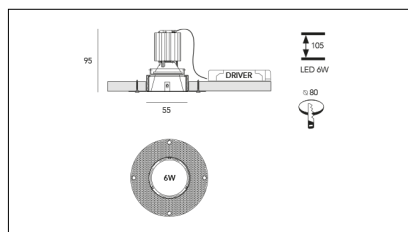

Codice Articolo	Articolo	Colore	Temperatura Luce (°K)	Tipo di incasso	Emissione (°)	Potenza (W)
18.1001.01.20.4	RF50/LED-4 5.8W 350mA 25°	Bianco (4)	3000	Cartongesso	25	5,8
18.1001.01.2700.20.4	RF50/LED-4 5.8W 350mA 25° 2700°K	Bianco (4)	2700	Cartongesso	25	5,8
18.1001.01.2700.40.4	RF50/LED-4 5.8W 350mA 34° 2700°K	Bianco (4)	2700	Cartongesso	34	5,8
18.1001.01.40.4	RF50/LED-4 5.8W 350mA 34°	Bianco (4)	3000	Cartongesso	34	5,8
18.1001.01.4000.20.4	*RF_50	Bianco (4)	4000	Cartongesso	25	5,8
18.1001.01.4000.40.4	RF50/LED-4 5.8W 350mA 34° 4000°K	Bianco (4)	4000	Cartongesso	34	5,8



Codice Articolo	Nome	Descrizione
18.1001.PK	RF50/PK	Plaster kit per proiettore ad incasso RF50