


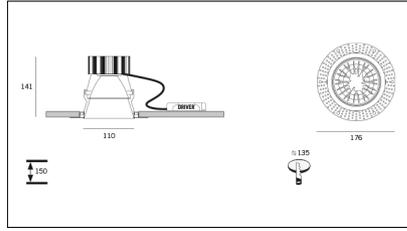


# MACROLUX




Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.2008.01.16.2	RF110/LED-2 12W 350mA 16°	Black (2)	3000	Plasterboard	16	12
18.2008.01.2700.16.2	RF110/LED-2 12W 350mA 16° 2700°K	Black (2)	2700	Plasterboard	16	12
18.2008.01.2700.32.2	RF110	Black (2)	2700	Plasterboard	38	12
18.2008.01.32.2	*RF110	Black (2)	3000	Plasterboard	38	12
18.2008.01.4000.16.2	RF110	Black (2)	4000	Plasterboard	16	12
18.2008.01.4000.32.2	RF110	Black (2)	4000	Plasterboard	38	12
18.2008.02.16.2	RF110/LED-2 17W 500mA 16°	Black (2)	3000	Plasterboard	16	17
18.2008.02.2700.16.2	*RF_110	Black (2)	2700	Plasterboard	16	17
18.2008.02.2700.32.2	*RF_110	Black (2)	2700	Plasterboard	38	17
18.2008.02.32.2	RF110/LED-2 17W 500mA 32°	Black (2)	3000	Plasterboard	38	17
18.2008.02.4000.16.2	*RF_110	Black (2)	4000	Plasterboard	16	17
18.2008.02.4000.32.2	*RF_110	Black (2)	4000	Plasterboard	38	17
18.2008.03.16.2	RF110	Black (2)	3000	Plasterboard	16	17
18.2008.03.2700.16.2	RF110	Black (2)	2700	Plasterboard	16	17
18.2008.03.2700.32.2	RF110	Black (2)	2700	Plasterboard	38	17
18.2008.03.32.2	RF110/LED-2 17W max 500mA 32°	Black (2)	3000	Plasterboard	38	17
18.2008.03.4000.16.2	RF110	Black (2)	4000	Plasterboard	16	17
18.2008.03.4000.32.2	RF110	Black (2)	4000	Plasterboard	38	17
18.2008.08.16.2	RF110	Black (2)	3000	Plasterboard	16	17
18.2008.08.2700.16.2	RF110	Black (2)	2700	Plasterboard	16	17
18.2008.08.2700.32.2	RF110	Black (2)	2700	Plasterboard	38	17
18.2008.08.32.2	RF110/LED-2 17W 500mA 32° DALI	Black (2)	3000	Plasterboard	38	17
18.2008.08.4000.16.2	RF110	Black (2)	4000	Plasterboard	16	17
18.2008.08.4000.32.2	RF110/LED-2 17W 500mA 32° 4000°K DALI	Black (2)	4000	Plasterboard	38	17

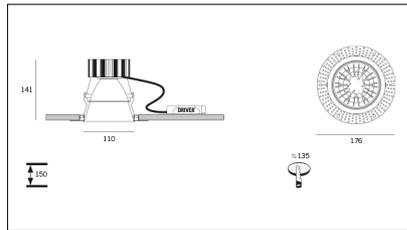

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.2008.01.16.4	RF110/LED-4 12W 350mA 16°	White (4)	3000	Plasterboard	16	12
18.2008.01.2700.16.4	RF110/LED-4 12W 350mA 16° 2700°K	White (4)	2700	Plasterboard	16	12
18.2008.01.2700.32.4	RF110/LED-4 12W 350mA 32° 2700°K	White (4)	2700	Plasterboard	38	12
18.2008.01.32.4	RF110/LED-4 12W 350mA 32°	White (4)	3000	Plasterboard	38	12
18.2008.01.4000.16.4	RF110	White (4)	4000	Plasterboard	16	12
18.2008.01.4000.32.4	RF110	White (4)	4000	Plasterboard	38	12
18.2008.02.16.4	RF110/LED-4 17W 500mA 16°	White (4)	3000	Plasterboard	16	17
18.2008.02.2700.16.4	*RF_110	White (4)	2700	Plasterboard	16	17
18.2008.02.2700.32.4	RF110/LED-4 17W 500mA 32° 2700°K	White (4)	2700	Plasterboard	38	17
18.2008.02.32.4	RF110/LED-4 17W 500mA 32°	White (4)	3000	Plasterboard	38	17
18.2008.02.4000.16.4	*RF_110	White (4)	4000	Plasterboard	16	17
18.2008.02.4000.32.4	*RF_110	White (4)	4000	Plasterboard	38	17
18.2008.03.16.4	RF110	White (4)	3000	Plasterboard	16	17
18.2008.03.2700.16.4	RF110	White (4)	2700	Plasterboard	16	17
18.2008.03.2700.32.4	RF110	White (4)	2700	Plasterboard	38	17

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Beam angle (°)	Watt (W)
18.2008.03.32.4	RF110	White (4)	3000	Plasterboard	38	17
18.2008.03.4000.16.4	RF110	White (4)	4000	Plasterboard	16	17
18.2008.03.4000.32.4	RF110	White (4)	4000	Plasterboard	38	17
18.2008.08.16.4	RF110/LED-4 17W 500mA 16° DALI	White (4)	3000	Plasterboard	16	17
18.2008.08.2700.16.4	RF110	White (4)	2700	Plasterboard	16	17
18.2008.08.2700.32.4	RF110	White (4)	2700	Plasterboard	38	17
18.2008.08.32.4	RF110/LED-4 17W 500mA 32° DALI	White (4)	3000	Plasterboard	38	17
18.2008.08.4000.16.4	RF110	White (4)	4000	Plasterboard	16	17
18.2008.08.4000.32.4	RF110	White (4)	4000	Plasterboard	38	17



Article code	Name	Description
18.2008.PK	RF110-RC110/PK	Plaster kit per proiettore ad incasso RF110 e RC110