


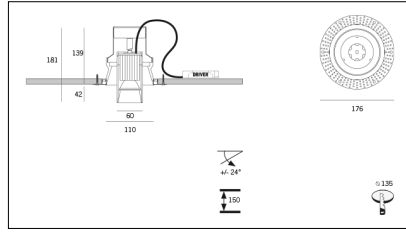




MACROLUX





Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Additional colour	Watt (W)	Beam angle (°)
18.2010.02.20.44	RC110/LED-44 9W 500mA 25°	White (4)	3000	Plasterboard	White (4)	8,9	25
18.2010.02.2700.20.44	RC110/LED-44 9W 500mA 20° 2700°K	White (4)	2700	Plasterboard	White (4)	8,9	25
18.2010.02.2700.34.44	RC110/LED-44 9W 500mA 40° 2700°K	White (4)	2700	Plasterboard	White (4)	8,9	34
18.2010.02.34.44	RC110/LED-44 9W 500mA 40°	White (4)	3000	Plasterboard	White (4)	8,9	34
18.2010.02.4000.20.44	*RC_110	White (4)	4000	Plasterboard	White (4)	8,9	25
18.2010.02.4000.34.44	RC110/LED-44 9W 500mA 40° 4000°K	White (4)	4000	Plasterboard	White (4)	8,9	34
18.2010.03.20.44	RC110/LED-44 9W max 500mA 25°	White (4)	3000	Plasterboard	White (4)	8,9	25
18.2010.03.2700.20.44	RC110/LED-44 9W max 500mA 25° 2700°K	White (4)	2700	Plasterboard	White (4)	8,9	25
18.2010.03.2700.34.44	RC110/LED-44 9W max 500mA 25° 2700°K	White (4)	2700	Plasterboard	White (4)	8,9	34
18.2010.03.34.44	*RC_110	White (4)	3000	Plasterboard	White (4)	8,9	34
18.2010.03.4000.20.44	*RC_110	White (4)	4000	Plasterboard	White (4)	8,9	25
18.2010.03.4000.34.44	*RC_110	White (4)	4000	Plasterboard	White (4)	8,9	34
18.2010.08.20.44	RC110/LED-44 9W 500mA 25° DALI	White (4)	3000	Plasterboard	White (4)	8,9	25
18.2010.08.2700.20.44	RC110/LED-44 9W 500mA 25° 2700°K DALI	White (4)	2700	Plasterboard	White (4)	8,9	25
18.2010.08.2700.34.44	*RC_110	White (4)	2700	Plasterboard	White (4)	8,9	34
18.2010.08.34.44	RC110/LED-44 9W 500mA 40° DALI	White (4)	3000	Plasterboard	White (4)	8,9	34
18.2010.08.4000.20.44	*RC_110	White (4)	4000	Plasterboard	White (4)	8,9	25
18.2010.08.4000.34.44	*RC_110	White (4)	4000	Plasterboard	White (4)	8,9	34

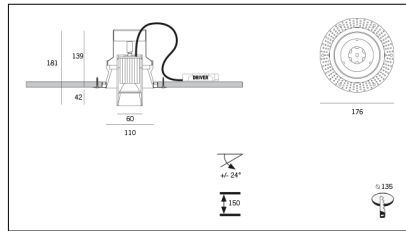


Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Additional colour	Watt (W)	Beam angle (°)
18.2010.02.20.22	RC110/LED-22 9W 500mA 25°	Black (2)	3000	Plasterboard	Black (2)	8,9	25
18.2010.02.2700.20.22	*RC_110	Black (2)	2700	Plasterboard	Black (2)	8,9	25
18.2010.02.2700.34.22	*RC_110	Black (2)	2700	Plasterboard	Black (2)	8,9	34
18.2010.02.34.22	RC110/LED-22 9W 500mA 40°	Black (2)	3000	Plasterboard	Black (2)	8,9	34
18.2010.02.4000.20.22	RC110/LED-22 9W 500mA 25° 4000°K	Black (2)	4000	Plasterboard	Black (2)	8,9	25
18.2010.02.4000.34.22	RC110/LED-22 9W 500mA 40° 4000°K	Black (2)	4000	Plasterboard	Black (2)	8,9	34
18.2010.03.20.22	RC110/LED-22 9W max 500mA 25°	Black (2)	3000	Plasterboard	Black (2)	8,9	25
18.2010.03.2700.20.22	RC110/LED-22 9W max 500mA 25° 2700°K	Black (2)	2700	Plasterboard	Black (2)	8,9	25
18.2010.03.2700.34.22	*RC_110	Black (2)	2700	Plasterboard	Black (2)	8,9	34
18.2010.03.34.22	*RC_110	Black (2)	3000	Plasterboard	Black (2)	8,9	34
18.2010.03.4000.20.22	*RC_110	Black (2)	4000	Plasterboard	Black (2)	8,9	25
18.2010.03.4000.34.22	*RC_110	Black (2)	4000	Plasterboard	Black (2)	8,9	34
18.2010.08.20.22	*RC_110	Black (2)	3000	Plasterboard	Black (2)	8,9	25
18.2010.08.2700.20.22	RC110/LED-22 9W 500mA 25° 2700°K DALI	Black (2)	2700	Plasterboard	Black (2)	8,9	25
18.2010.08.2700.34.22	RC110/LED-22 9W 500mA 40° 2700°K DALI	Black (2)	2700	Plasterboard	Black (2)	8,9	34
18.2010.08.34.22	RC110/LED-22 9W 500mA 40° DALI	Black (2)	3000	Plasterboard	Black (2)	8,9	34
18.2010.08.4000.20.22	*RC_110	Black (2)	4000	Plasterboard	Black (2)	8,9	25
18.2010.08.4000.34.22	*RC_110	Black (2)	4000	Plasterboard	Black (2)	8,9	34

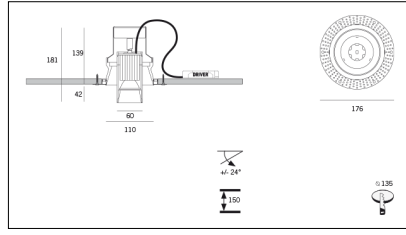

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Additional colour	Watt (W)	Beam angle (°)
18.2010.02.20.42	RC110/LED-42 8.6W 500mA 25°	White (4)	3000	Plasterboard	Black (2)	8,9	25
18.2010.02.2700.20.42	*RC_110	White (4)	2700	Plasterboard	Black (2)	8,9	25
18.2010.02.2700.34.42	RC110/LED-42 9W 500mA 40° 2700°K	White (4)	2700	Plasterboard	Black (2)	8,9	34
18.2010.02.34.42	RC110/LED-42 9W 500mA 40°	White (4)	3000	Plasterboard	Black (2)	8,9	34
18.2010.02.4000.20.42	*RC_110	White (4)	4000	Plasterboard	Black (2)	8,9	25
18.2010.02.4000.34.42	*RC_110	White (4)	4000	Plasterboard	Black (2)	8,9	34
18.2010.03.20.42	*RC_110	White (4)	3000	Plasterboard	Black (2)	8,9	25
18.2010.03.2700.20.42	*RC_110	White (4)	2700	Plasterboard	Black (2)	8,9	25
18.2010.03.2700.34.42	*RC_110	White (4)	2700	Plasterboard	Black (2)	8,9	34
18.2010.03.34.42	*RC_110	White (4)	3000	Plasterboard	Black (2)	8,9	34
18.2010.03.4000.20.42	*RC_110	White (4)	4000	Plasterboard	Black (2)	8,9	25
18.2010.03.4000.34.42	*RC_110	White (4)	4000	Plasterboard	Black (2)	8,9	34
18.2010.08.20.42	RC110/LED-42 9W 500mA 25° DALI	White (4)	3000	Plasterboard	Black (2)	8,9	25
18.2010.08.2700.20.42	*RC_110	White (4)	2700	Plasterboard	Black (2)	8,9	25
18.2010.08.2700.34.42	*RC_110	White (4)	2700	Plasterboard	Black (2)	8,9	34
18.2010.08.34.42	RC110/LED-42 9W 500mA 40° DALI	White (4)	3000	Plasterboard	Black (2)	8,9	34
18.2010.08.4000.20.42	*RC_110	White (4)	4000	Plasterboard	Black (2)	8,9	25
18.2010.08.4000.34.42	*RC_110	White (4)	4000	Plasterboard	Black (2)	8,9	34

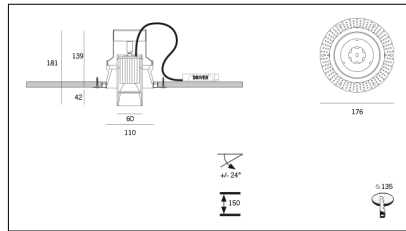

Article code	Article	Colour	Light Temperature (°K)	Type of recessed	Additional colour	Watt (W)	Beam angle (°)
18.2010.02.20.24	RC110/LED-24 9W 500mA 25°	Black (2)	3000	Plasterboard	White (4)	8,9	25
18.2010.02.2700.20.24	*RC_110	Black (2)	2700	Plasterboard	White (4)	8,9	25
18.2010.02.2700.34.24	*RC_110	Black (2)	2700	Plasterboard	White (4)	8,9	34
18.2010.02.34.24	RC110/LED-24 9W 500mA 40°	Black (2)	3000	Plasterboard	White (4)	8,9	34
18.2010.02.4000.20.24	RC110/LED-24 9W 500mA 25° 4000°K	Black (2)	4000	Plasterboard	White (4)	8,9	25
18.2010.02.4000.34.24	*RC_110	Black (2)	4000	Plasterboard	White (4)	8,9	34
18.2010.03.20.24	*RC_110	Black (2)	3000	Plasterboard	White (4)	8,9	25
18.2010.03.2700.20.24	*RC_110	Black (2)	2700	Plasterboard	White (4)	8,9	25
18.2010.03.2700.34.24	*RC_110	Black (2)	2700	Plasterboard	White (4)	8,9	34
18.2010.03.34.24	*RC_110	Black (2)	3000	Plasterboard	White (4)	8,9	34
18.2010.03.4000.20.24	*RC_110	Black (2)	4000	Plasterboard	White (4)	8,9	25
18.2010.03.4000.34.24	*RC_110	Black (2)	4000	Plasterboard	White (4)	8,9	34
18.2010.08.20.24	*RC_110	Black (2)	3000	Plasterboard	White (4)	8,9	25
18.2010.08.2700.20.24	*RC_110	Black (2)	2700	Plasterboard	White (4)	8,9	25
18.2010.08.2700.34.24	RC110/LED-24 9W 500mA 40° 2700°K DALI	Black (2)	2700	Plasterboard	White (4)	8,9	34
18.2010.08.34.24	*RC_110	Black (2)	3000	Plasterboard	White (4)	8,9	34
18.2010.08.4000.20.24	*RC_110	Black (2)	4000	Plasterboard	White (4)	8,9	25
18.2010.08.4000.34.24	*RC_110	Black (2)	4000	Plasterboard	White (4)	8,9	34



Article code	Name	Description
18.2008.PK	RF110-RC110/PK	Plaster kit per proiettore ad incasso RF110 e RC110