


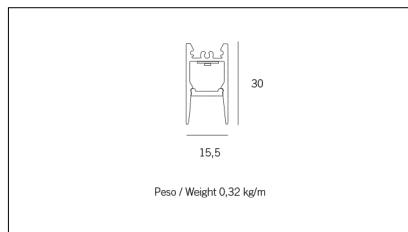






# MACROLUX

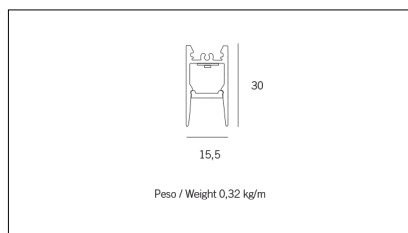


Article code	Article	Colour	Light Temperature (°K)	Watt (W)	Length (mm)
1324.0112.00.92	MX1_12-92 L=max 3 m	Black (92)			
1324.0112.01.92	MX1_12/3000-92 L=3m - EMPTY STANDARD	Black (92)			3000
1324.0112.01.M15.92	MX1_12/3000-92 L=3m - 15x EMPTY STANDARD	Black (92)			3000
1324.0112.1000.2700.92	*MX1_12	Black (92)	2700	19,6	1000
1324.0112.1000.4000.92	*MX1_12	Black (92)	4000	19,6	1000
1324.0112.1000.92	*MX1_12	Black (92)	3000	19,6	1000
1324.0112.120.2700.92	MX1_12/9,6W/2700°K-92	Black (92)	2700	9,6	
1324.0112.120.4000.92	MX1_12/9,6W/4000°K-92	Black (92)	4000	9,6	
1324.0112.120.92	MX1_12/9,6W/3000°K-92	Black (92)	3000	9,6	
1324.0112.1500.2700.92	*MX1_12	Black (92)	2700	29,4	1500
1324.0112.1500.4000.92	*MX1_12	Black (92)	4000	29,4	1500
1324.0112.1500.92	MX1_12-PLAFONE/1500/30W/3000°K-92	Black (92)	3000	29,4	1500
1324.0112.240.2700.92	MX1_12/19.6W/2700°K-92	Black (92)	2700	19,6	
1324.0112.240.4000.92	MX1_12/19.6W/4000°K-92	Black (92)	4000	19,6	
1324.0112.240.92	MX1_12/19.6W/3000°K-92	Black (92)	3000	19,6	
1324.0112.500.2700.92	*MX1_12	Black (92)	2700	9,8	500
1324.0112.500.4000.92	*MX1_12	Black (92)	4000	9,8	500
1324.0112.500.92	MX1_12-PLAFONE/500/10W/3000°K-92	Black (92)	3000	9,8	500




Article code	Article	Colour	Light Temperature (°K)	Watt (W)	Length (mm)
1324.0112.00.94	MX1_12-94 L=max 3 m	White (94)			
1324.0112.01.94	MX1_12/3000-94 L=3m - EMPTY STANDARD	White (94)			3000
1324.0112.01.M15.94	MX1_12/3000-94 L=3m - 15x EMPTY STANDARD	White (94)			3000
1324.0112.1000.2700.94	MX1_12-PLAFONE/1000/19.6W/2700°K-94	White (94)	2700	19,6	1000
1324.0112.1000.4000.94	MX1_12-PLAFONE/1000/19.6W/4000°K-94	White (94)	4000	19,6	1000
1324.0112.1000.94	MX1_12-PLAFONE/1000/19.6W/3000°K-94	White (94)	3000	19,6	1000
1324.0112.120.2700.94	MX1_12/9,6W/2700°K-94	White (94)	2700	9,6	
1324.0112.120.4000.94	MX1_12/9,6W/4000°K-94	White (94)	4000	9,6	
1324.0112.120.94	MX1_12/9,6W/3000°K-94	White (94)	3000	9,6	
1324.0112.1500.2700.94	*MX1_12	White (94)	2700	29,4	1500
1324.0112.1500.4000.94	*MX1_12	White (94)	4000	29,4	1500
1324.0112.1500.94	MX1_12-PLAFONE/1500/27,8W/3000°K-94	White (94)	3000	29,4	1500
1324.0112.240.2700.94	MX1_12/19.6W/2700°K-94	White (94)	2700	19,6	
1324.0112.240.4000.94	MX1_12/19.6W/4000°K-94	White (94)	4000	19,6	
1324.0112.240.94	MX1_12/19,6W/3000°K-94	White (94)	3000	19,6	
1324.0112.500.2700.94	*MX1_12	White (94)	2700	9,8	500
1324.0112.500.4000.94	*MX1_12	White (94)	4000	9,8	500
1324.0112.500.94	MX1_12-PLAFONE/500/9,3W/3000°K-94	White (94)	3000	9,8	500

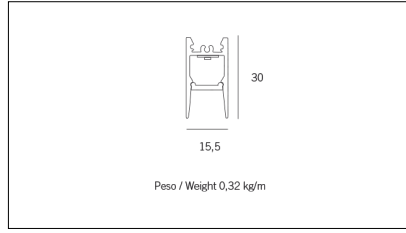


Article code	Article	Colour	Light Temperature (°K)	Watt (W)	Length (mm)
1324.0112.00.98	MX1_12-98 L=max 3 m	Grey anodize (98)			
1324.0112.01.98	MX1_12/3000-98 L=3m - EMPTY STANDARD	Grey anodize (98)			3000
1324.0112.01.M15.98	MX1_12/3000-98 L=3m - 15x EMPTY STANDARD	Grey anodize (98)			3000
1324.0112.1000.2700.98	*MX1_12	Grey anodize (98)	2700	19,6	1000
1324.0112.1000.4000.98	*MX1_12	Grey anodize (98)	4000	19,6	1000
1324.0112.1000.98	*MX1_12	Grey anodize (98)	3000	19,6	1000
1324.0112.120.2700.98	MX1_12/9,6W/2700°K-98	Grey anodize (98)	2700	9,6	
1324.0112.120.4000.98	MX1_12/9,6W/4000°K-98	Grey anodize (98)	4000	9,6	
1324.0112.120.98	MX1_12/9,6W/3000°K-98	Grey anodize (98)	3000	9,6	
1324.0112.1500.2700.98	*MX1_12	Grey anodize (98)	2700	29,4	1500
1324.0112.1500.4000.98	*MX1_12	Grey anodize (98)	4000	29,4	1500
1324.0112.1500.98	MX1_12-PLAFONE/1500/27,8W/3000°K-98	Grey anodize (98)	3000	29,4	1500
1324.0112.240.2700.98	MX1_12/19.6W/2700°K-98	Grey anodize (98)	2700	19,6	
1324.0112.240.4000.98	MX1_12/19.6W/4000°K-98	Grey anodize (98)	4000	19,6	
1324.0112.240.98	MX1_12/19.6W/3000°K-98	Grey anodize (98)	3000	19,6	
1324.0112.500.2700.98	*MX1_12	Grey anodize (98)	2700	9,8	500
1324.0112.500.4000.98	*MX1_12	Grey anodize (98)	4000	9,8	500
1324.0112.500.98	*MX1_12	Grey anodize (98)	3000	9,8	500




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	




Article code	Name	Description
1320.1112	UNIVERSALE M_12 / MB_15	Ancoraggio plafone / giunto lineare - Compatibile con MTO_12, MT1_12, MX1_12 e MB_15
1320.1112.10	UNIVERSALE M_12/MB_15 - 10 PZ	Ancoraggio plafone / giunto lineare




Article code	Name	Description	Watt (W)	Driver's type
1.024015	Driver LED 24V 15W IP20	Dimensioni 45 x 19 x 123 mm	15	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024020	Driver LED 24V 20W IP20	Dimensioni 36 x 16 x 103 mm	20	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024030	Driver LED 24V 30W IP20	Dimensioni 50 x 17 x 156 mm	30	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024050	Driver LED 24V 50W IP20	Dimensioni 59 x 29 x 167 mm	50	On/Off



Article code	Name	Description	Watt (W)	Driver's type
1.024075	Driver LED 24V 75W IP20	Dimensioni 61 x 29 x 184 mm	75	On/Off



Article code	Name	Description	Colour
1324.5112.94	MX1_12/TC-4	Testata di chiusura, finitura bianco / End cap, finishing white (1 pz.)	White (94)
1324.5112.94.10	MX1_12/TC-4 - 10 PZ	Testata di chiusura, finitura bianco / End cap, finishing white	White (94)



Article code	Name	Description	Colour
1324.5112.92	MX1_12/TC-2	Testata di chiusura, finitura nero / End cap, finishing black (1 pz.)	Black (92)
1324.5112.92.10	MX1_12/TC-2 - 10 PZ	Testata di chiusura, finitura nero / End cap, finishing black	Black (92)




Article code	Name	Description
1324.2212	MX2_12/G090 (Solo taglio)	Taglio ad angolo orizzontale 90° / Orizontal corner's cut 90°




Article code	Name	Description
1324.3112	MX1_12/GV90 (Solo taglio)	Connessione ad angolo verticale 90° / Vertical connection corner 90°



Article code	Name	Description
1324.4112	MX1_12/GV270 (Solo taglio)	Connessione ad angolo verticale 270° / Vertical connection corner 270°



Article code	Name	Description	Colour
1324.5112.98	MX1_12/TC-98	Testata di chiusura, finitura grigio alluminio/ End cap, finishing grey aluminium	Grey anodize (98)
1324.5112.98.10	MX1_12/TC-98 - 10 PZ	Testata di chiusura, finitura grigio alluminio/ End cap, finishing grey aluminium	Grey anodize (98)



Article code	Name	Description
1324.9212.01	M2_12/Diffusore Opale L=3m - EMPTY STANDARD	Profilo PC Opale / Compatibile con MX1_12, MT2_12, MX2_12, MC_90 e MC_270 - Senza taglio a misura