


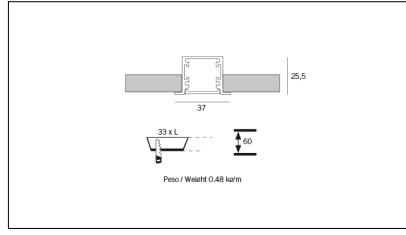



MACROLUX




| Article code | Article | Colour | Diffuser | Type of recessed | Light Temperature (°K) | Watt (W) | Length (mm) |
|------------------------|---|------------|-----------|------------------|------------------------|----------|-------------|
| 1320.0027.00.94 | MT0_27/DO-94 L=max 3 m | White (94) | Opal | | | | |
| 1320.0027.01.94 | MT0_27/DO/3000-94 L=3m - EMPTY STANDARD | White (94) | Opal | Plasterboard | | | 3000 |
| 1320.0027.01.M10.94 | MT0_27/DO/3000-94 L=3m - 10x EMPTY STANDARD | White (94) | Opal | Plasterboard | | | 3000 |
| 1320.0027.120.2700.94 | MT0_27/9,6W/2700°K-94 | White (94) | Opal | Plasterboard | 2700 | 9,6 | |
| 1320.0027.120.4000.94 | mt0_27/4000-94# | White (94) | Opal | Plasterboard | 4000 | 9,6 | |
| 1320.0027.120.94 | MT0_27/9,6W/3000°K-94 | White (94) | Opal | Plasterboard | 3000 | 9,6 | |
| 1320.0027.240.2700.94 | MT0_27/19.6W/2700°K-94 | White (94) | Opal | Plasterboard | 2700 | 19,6 | |
| 1320.0027.240.4000.94 | MT0_27/19.6W/4000°K-94 | White (94) | Opal | Plasterboard | 4000 | 19,6 | |
| 1320.0027.240.94 | MT0_27/19.6W/3000°K-94 | White (94) | Opal | Plasterboard | 3000 | 19,6 | |
| 1320.00279.00.94 | MT0_27/DP-94 L=max 3 m | White (94) | Prismatic | | | | |
| 1320.00279.01.94 | MT0_27/DP/3000-94 L=3m - EMPTY STANDARD | White (94) | Prismatic | Plasterboard | | | 3000 |
| 1320.00279.01.M10.94 | MT0_27/DP/3000-94 L=3m - 10x EMPTY STANDARD | White (94) | Prismatic | Plasterboard | | | 3000 |
| 1320.00279.120.2700.94 | MT0_27/DP/9,6W/2700°K-94 | White (94) | Prismatic | Plasterboard | 2700 | 9,6 | |
| 1320.00279.120.4000.94 | MT0_27/DP/9,6W/4000°K-94 | White (94) | Prismatic | Plasterboard | 4000 | 9,6 | |
| 1320.00279.120.94 | MT0_27/DP/9,6W/3000°K-94 | White (94) | Prismatic | Plasterboard | 3000 | 9,6 | |
| 1320.00279.240.2700.94 | MT0_27/DP/19.6W/2700°K-94 | White (94) | Prismatic | Plasterboard | 2700 | 19,6 | |
| 1320.00279.240.4000.94 | MT0_27/DP/19.6W/4000°K-94 | White (94) | Prismatic | Plasterboard | 4000 | 19,6 | |
| 1320.00279.240.94 | MT0_27/DP/19.6W/3000°K-94 | White (94) | Prismatic | Plasterboard | 3000 | 19,6 | |




| Article code | Name | Description |
|--------------|--|-------------|
| 1324.0000 | STRIP LED/Primer monouso 0,66 ml | |
| 1324.0000.10 | STRIP LED/Primer monouso 0,66 ml - 10 PZ | |




| Article code | Name | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024015 | Driver LED 24V 15W IP20 | | 15 | On/Off |




| Article code | Name | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024020 | Driver LED 24V 20W IP20 | | 20 | On/Off |




| Article code | Name | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024036 | Driver LED 24V 36W IP40 | | 36 | On/Off |




| Article code | Name | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024060C | Driver LED 24V 60W IP40 | | 60 | On/Off |




| Article code | Name | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024075 | Driver LED 24V 75W IP20 | | 75 | On/Off |




| Article code | Name | Description | Watt (W) | Driver's type |
|--------------|--------------------------|-------------|----------|---------------|
| 1.97759 | Driver LED 24V 150W IP67 | | 150 | On/Off |




| Article code | Name | Description | Watt (W) | Driver's type |
|--------------|--------------------------|-----------------------------|----------|---------------|
| 1.97745 | Driver LED 24V 200W IP67 | Dimensioni 69 x 37 x 206 mm | 200 | On/Off |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|------------------------|---|----------|------------------------|-------------|
| 1310.27.300 | MKT_27/300/7,5W/3000°K | Profilo alluminio L=300 mm 7,5W 24V 950lm 3000°K CRI>90 - Driver escluso | 7,5 | 3000 | 300 |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|-----------------------|---|----------|------------------------|-------------|
| 1310.27.600 | MKT_27/600/15W/3000°K | Profilo alluminio L=600 mm 15W 24V 1900lm 3000°K CRI>90 - Driver escluso | 15 | 3000 | 600 |



| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|-------------------------|---|----------|------------------------|-------------|
| 1310.27.900 | MKT_27/900/22,5W/3000°K | Profilo alluminio L=900 mm 22,5W 24V 2850lm 3000°K CRI>90 - Driver escluso | 22,5 | 3000 | 900 |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|------------------------|---|----------|------------------------|-------------|
| 1310.27.1200 | MKT_27/1200/30W/3000°K | Profilo alluminio L=1200 mm 30W 24V 3800lm 3000°K CRI>90 - Driver escluso | 30 | 3000 | 1200 |




| Article code | Name | Description | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|--------------------------|---|----------|------------------------|-------------|
| 1310.27.1500 | MKT_27/1500/37,5W/3000°K | Profilo alluminio L=1500 mm 37,5W 24V 4750lm 3000°K CRI>90 - Driver escluso | 37.5 | 3000 | 1500 |




| Article code | Name | Description | Length (mm) |
|--------------|-----------|------------------------------------|-------------|
| 1310.27.00 | MKT_27/CA | Cavo 24V di alimentazione L=500 mm | 500 |



| Article code | Name | Description | Colour |
|-----------------|---------------------|--------------------------------------|------------|
| 1320.5027.94 | MT0_27/TC-4 | Testata di chiusura, finitura bianco | White (94) |
| 1320.5027.94.10 | MT0_27/TC-4 - 10 PZ | Testata di chiusura finitura bianco | White (94) |



| Article code | Name | Description |
|--------------|-----------|-------------------|
| 1320.6027 | MT0_27/SA | Staffa ancoraggio |




| Article code | Name | Description |
|--------------|----------|---|
| 1324.3027.1 | M_27/GAV | Accessori per giunzione angolare verticale - Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27 |


200 x 200

Powered by HTML.COM


| Article code | Name | Description |
|--------------|------------|--|
| 1324.4027 | M_27/GV270 | Connessione ad angolo verticale 270° per modelli MX0_27, MX1_27, MT1_27 / Vertical connection corner 270° for all models MX0_27, MX1_27, MT1_27. |



| Article code | Name | Description |
|--------------|-----------------|--|
| 1324.1027 | M_27/GL | Staffa di giunzione lineare - Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27. |
| 1324.1027.10 | M_27/GL - 10 PZ | Staffa di giunzione lineare - Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27. |



| Article code | Name | Description |
|--------------|--|---|
| 1324.9127.01 | M_27/Diffusore Opale L=3m - EMPTY STANDARD | Profilo PC Opale / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura |



| Article code | Name | Description |
|---------------|--|---|
| 1324.91279.01 | M_27/Diffusore Prismatico L=3m - EMPTY STANDARD | Profilo PC Prismatico / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura |