


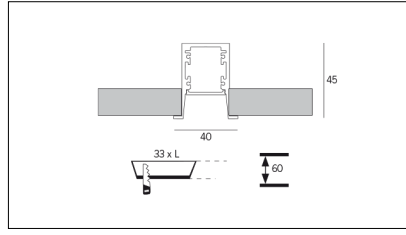



# MACROLUX




| Article code           | Article                                     | Colour     | Type of recessed | Light Temperature (°K) | Watt (W) | Diffuser  | Length (mm) |
|------------------------|---|------------|------------------|------------------------|----------|-----------|-------------|
| 1324.0027.00.94        | MX0_27/DO-94 L=max 3 m                      | White (94) | Plasterboard     |                        |          | Opal      |             |
| 1324.0027.01.94        | MX0_27/DO/3000-94 L=3m - EMPTY STANDARD     | White (94) | Plasterboard     |                        |          | Opal      | 3000        |
| 1324.0027.01.M10.94    | MX0_27/DO/3000-94 L=3m - 10x EMPTY STANDARD | White (94) | Plasterboard     |                        |          | Opal      | 3000        |
| 1324.0027.120.2700.94  | MX0_27/DO/9,6W/2700°K-94                    | White (94) | Plasterboard     | 2700                   | 9,6      |           |             |
| 1324.0027.120.4000.94  | MX0_27/DO/9,6W/4000°K-94                    | White (94) | Plasterboard     | 4000                   | 9,6      |           |             |
| 1324.0027.120.94       | MX0_27/DO/9,6W/3000°K-94                    | White (94) | Plasterboard     | 3000                   | 9,6      |           |             |
| 1324.0027.240.2700.94  | MX0_27/DO/19.6W/2700°K-94                   | White (94) | Plasterboard     | 2700                   | 19,6     |           |             |
| 1324.0027.240.4000.94  | MX0_27/DO/19.6W/4000°K-94                   | White (94) | Plasterboard     | 4000                   | 19,6     |           |             |
| 1324.0027.240.94       | MX0_27/DO/19.6W/3000°K-94                   | White (94) | Plasterboard     | 3000                   | 19,6     |           |             |
| 1324.00279.00.94       | MX0_27/DP-94 L=max 3 m                      | White (94) | Plasterboard     |                        |          | Prismatic |             |
| 1324.00279.01.94       | MX0_27/DP/3000-94 L=3m - EMPTY STANDARD     | White (94) | Plasterboard     |                        |          | Prismatic | 3000        |
| 1324.00279.01.M10.94   | MX0_27/DP/3000-94 L=3m - 10x EMPTY STANDARD | White (94) | Plasterboard     |                        |          | Prismatic | 3000        |
| 1324.00279.120.2700.94 | MX0_27/DP/9,6W/2700°K-94                    | White (94) | Plasterboard     | 2700                   | 9,6      |           |             |
| 1324.00279.120.4000.94 | MX0_27/DP/9,6W/4000°K-94                    | White (94) | Plasterboard     | 4000                   | 9,6      |           |             |
| 1324.00279.120.94      | MX0_27/DP/9,6W/3000°K-94                    | White (94) | Plasterboard     | 3000                   | 9,6      |           |             |
| 1324.00279.240.2700.94 | MX0_27/DP/19.6W/2700°K-94                   | White (94) | Plasterboard     | 2700                   | 19,6     |           |             |
| 1324.00279.240.4000.94 | MX0_27/DP/19.6W/4000°K-94                   | White (94) | Plasterboard     | 4000                   | 19,6     |           |             |
| 1324.00279.240.94      | MX0_27/DP/19.6W/3000°K-94                   | White (94) | Plasterboard     | 3000                   | 19,6     |           |             |




| Article code | Name                                     | Description |
|--------------|--|-------------|
| 1324.0000    | STRIP LED/Primer monouso 0,66 ml         |             |
| 1324.0000.10 | STRIP LED/Primer monouso 0,66 ml - 10 PZ |             |




| Article code | Name                    | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024015     | Driver LED 24V 15W IP20 |             | 15       | On/Off        |



| Article code | Name                    | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024020     | Driver LED 24V 20W IP20 |             | 20       | On/Off        |



| Article code | Name                    | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024036     | Driver LED 24V 36W IP40 |             | 36       | On/Off        |




| Article code | Name                        | Description | Watt (W) | Driver's type |
|--------------|-----------------------------|-------------|----------|---------------|
| 1.024050     | EOL_Driver LED 24V 50W IP20 |             | 50       | On/Off        |


200 x 200

Powered by HTML.COM


| Article code | Name                    | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024075     | Driver LED 24V 75W IP20 |             | 75       | On/Off        |




| Article code | Name                     | Description | Watt (W) |
|--------------|--------------------------|-------------|----------|
| 1.97759      | Driver LED 24V 150W IP67 |             | 150      |




| Article code | Name                     | Description                 | Watt (W) |
|--------------|--------------------------|-----------------------------|----------|
| 1.97745      | Driver LED 24V 200W IP67 | Dimensioni 69 x 37 x 206 mm | 200      |




| Article code | Name                   | Description   | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|------------------------|---|----------|------------------------|-------------|
| 1310.27.300  | MKT_27/300/7,5W/3000°K | Profilo alluminio L=300 mm 7,5W 24V 950lm 3000°K<br>CRI>90 - Driver escluso | 7,5      | 3000                   | 300         |




| Article code | Name                  | Description   | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|-----------------------|---|----------|------------------------|-------------|
| 1310.27.600  | MKT_27/600/15W/3000°K | Profilo alluminio L=600 mm 15W 24V 1900lm 3000°K<br>CRI>90 - Driver escluso | 15       | 3000                   | 600         |



| Article code | Name                    | Description   | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|-------------------------|---|----------|------------------------|-------------|
| 1310.27.900  | MKT_27/900/22,5W/3000°K | Profilo alluminio L=900 mm 22,5W 24V 2850lm<br>3000°K CRI>90 - Driver escluso | 22,5     | 3000                   | 900         |



| Article code | Name                   | Description   | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|------------------------|---|----------|------------------------|-------------|
| 1310.27.1200 | MKT_27/1200/30W/3000°K | Profilo alluminio L=1200 mm 30W 24V 3800lm 3000°K CRI>90 - Driver escluso | 30       | 3000                   | 1200        |



| Article code | Name                     | Description   | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|--------------------------|---|----------|------------------------|-------------|
| 1310.27.1500 | MKT_27/1500/37,5W/3000°K | Profilo alluminio L=1500 mm 37,5W 24V 4750lm 3000°K CRI>90 - Driver escluso | 37.5     | 3000                   | 1500        |



| Article code | Name      | Description                        | Length (mm) |
|--------------|-----------|------------------------------------|-------------|
| 1310.27.00   | MKT_27/CA | Cavo 24V di alimentazione L=500 mm | 500         |

200 x 200


Powered by HTML.COM

| Article code | Name     | Description   |
|--------------|----------|---|
| 1324.3027.1  | M_27/GAV | Accessori per giunzione angolare verticale -<br>Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27 |


200 x 200

Powered by HTML.COM


| Article code | Name       | Description  |
|--------------|------------|--|
| 1324.4027    | M_27/GV270 | Connessione ad angolo verticale 270° per modelli<br>MX0_27, MX1_27, MT1_27 / Vertical connection<br>corner 270° for all models MX0_27, MX1_27, MT1_27. |




| Article code | Name            | Description   |
|--------------|-----------------|---|
| 1324.1027    | M_27/GL         | Staffa di giunzione lineare - Compatibile con MX0_27,<br>MX1_27, MT0_27 e MT1_27. |
| 1324.1027.10 | M_27/GL - 10 PZ | Staffa di giunzione lineare - Compatibile con MX0_27,<br>MX1_27, MT0_27 e MT1_27. |




| Article code    | Name                | Description   | Colour     |
|-----------------|---------------------|---|------------|
| 1324.5027.94    | MX0_27/TC-4         | Testata di chiusura, finitura bianco / End cap, finishing white | White (94) |
| 1324.5027.94.10 | MX0_27/TC-4 - 10 PZ | Testata di chiusura, finitura bianco / End cap, finishing white | White (94) |




| Article code | Name      | Description                 |
|--------------|-----------|-----------------------------|
| 1324.6027    | MX0_27/SA | Staffa ancoraggio / Bracket |



| Article code | Name      | Description  |
|--------------|-----------|--|
| 1324.2027    | M_27/G090 | Connessione ad angolo orizzontale 90° per modelli MX0_27, MX1_27, MT1_27 / Horizontal connection corner 90° for all models MX0_27, MX1_27, MT1_27. |



| Article code | Name                                       | Description   |
|--------------|--|---|
| 1324.9127.01 | M_27/Diffusore Opale L=3m - EMPTY STANDARD | Profilo PC Opale / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura |



| Article code  | Name  | Description  |
|---------------|---|--|
| 1324.91279.01 | M_27/Diffusore Prismatico L=3m - EMPTY STANDARD | Profilo PC Prismatico / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura |