


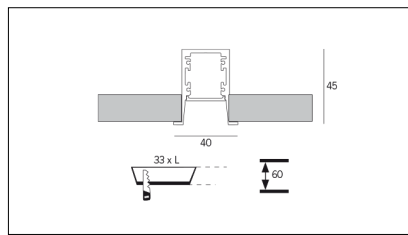



MACROLUX




Article code	Article	Colour	Type of recessed	Light Temperature (°K)	Watt (W)	Length (mm)	Diffuser
1324.0027.00.94	MX0_27/DO-94 L=max 3 m	White (94)	Plasterboard			3000	Opal
1324.0027.01.94	MX0_27/DO/3000-94 L=3m - EMPTY STANDARD	White (94)	Plasterboard			3000	Opal
1324.0027.01.M10.94	MX0_27/DO/3000-94 L=3m - 10x EMPTY STANDARD	White (94)	Plasterboard			3000	Opal
1324.0027.120.2700.94	MX0_27/DO/9,6W/2700°K-94	White (94)	Plasterboard	2700	9,6		
1324.0027.120.4000.94	MX0_27/DO/9,6W/4000°K-94	White (94)	Plasterboard	4000	9,6		
1324.0027.120.94	MX0_27/DO/9,6W/3000°K-94	White (94)	Plasterboard	3000	9,6		
1324.0027.240.2700.94	MX0_27/DO/19.6W/2700°K-94	White (94)	Plasterboard	2700	19,6		
1324.0027.240.4000.94	MX0_27/DO/18.5W/4000°K-94	White (94)	Plasterboard	4000	19,6		
1324.0027.240.94	MX0_27/DO/19.6W/3000°K-94	White (94)	Plasterboard	3000	19,6		
1324.00279.00.94	MX0_27/DP-94 L=max 3 m	White (94)	Plasterboard			3000	Prismatic
1324.00279.01.94	MX0_27/DP/3000-94 L=3m - EMPTY STANDARD	White (94)	Plasterboard			3000	Prismatic
1324.00279.01.M10.94	MX0_27/DP/3000-94 L=3m - 10x EMPTY STANDARD	White (94)	Plasterboard			3000	Prismatic
1324.00279.120.2700.94	MX0_27/DP/9,6W/2700°K-94	White (94)	Plasterboard	2700	9,6		
1324.00279.120.4000.94	MX0_27/DP/9,6W/4000°K-94	White (94)	Plasterboard	4000	9,6		
1324.00279.120.94	MX0_27/DP/9,6W/3000°K-94	White (94)	Plasterboard	3000	9,6		
1324.00279.240.2700.94	MX0_27/DP/19.6W/2700°K-94	White (94)	Plasterboard	2700	19,6		
1324.00279.240.4000.94	MX0_27/DP/19.6W/4000°K-94	White (94)	Plasterboard	4000	19,6		
1324.00279.240.94	MX0_27/DP/19.6W/3000°K-94	White (94)	Plasterboard	3000	19,6		




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	




Article code	Name	Description	Watt (W)	Driver's type
1.024015	Driver LED 24V 15W IP20	Dimensioni 45 x 19 x 123 mm	15	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024020	Driver LED 24V 20W IP20	Dimensioni 36 x 16 x 103 mm	20	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024030	Driver LED 24V 30W IP20	Dimensioni 50 x 17 x 156 mm	30	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024050	Driver LED 24V 50W IP20	Dimensioni 59 x 29 x 167 mm	50	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024075	Driver LED 24V 75W IP20	Dimensioni 61 x 29 x 184 mm	75	On/Off




Article code	Name	Description	Watt (W)
1.97759	Driver LED 24V 150W IP67	Dimensioni 69 x 37 x 206 mm	150




Article code	Name	Description	Watt (W)
1.97745	Driver LED 24V 200W IP67	Dimensioni 69 x 37 x 206 mm	200




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.300	MKT_27/300/7,5W/3000°K	Profilo alluminio L=300 mm 7,5W 24V 950lm 3000°K CRI>90 - Driver escluso	7,5	3000	300




Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.600	MKT_27/600/15W/3000°K	Profilo alluminio L=600 mm 15W 24V 1900lm 3000°K CRI>90 - Driver escluso	15	3000	600



Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.900	MKT_27/900/22,5W/3000°K	Profilo alluminio L=900 mm 22,5W 24V 2850lm 3000°K CRI>90 - Driver escluso	22,5	3000	900



Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.1200	MKT_27/1200/30W/3000°K	Profilo alluminio L=1200 mm 30W 24V 3800lm 3000°K CRI>90 - Driver escluso	30	3000	1200



Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1310.27.1500	MKT_27/1500/37,5W/3000°K	Profilo alluminio L=1500 mm 37,5W 24V 4750lm 3000°K CRI>90 - Driver escluso	37.5	3000	1500



Article code	Name	Description	Length (mm)
1310.27.00	MKT_27/CA	Cavo 24V di alimentazione L=500 mm	500

200 x 200


Powered by HTML.COM

Article code	Name	Description
1324.3027.1	M_27/GAV	Accessori per giunzione angolare verticale - Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27


200 x 200

Powered by HTML.COM


Article code	Name	Description
1324.4027	M_27/GV270 Taglio ad angolo verticale 270°	Connessione ad angolo verticale 270° per modelli MX0_27, MX1_27, MT1_27 / Vertical connection corner 270° for all models MX0_27, MX1_27, MT1_27.



Article code	Name	Description
1324.1027	M_27/GL	Staffa di giunzione lineare - Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27.
1324.1027.10	M_27/GL - 10 PZ	Staffa di giunzione lineare - Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27.




Article code	Name	Description	Colour
1324.5027.94	MX0_27/TC-4	Testata di chiusura, finitura bianco / End cap, finishing white	White (94)
1324.5027.94.10	MX0_27/TC-4 - 10 PZ	Testata di chiusura, finitura bianco / End cap, finishing white	White (94)




Article code	Name	Description
1324.6027	MX0_27/SA	Staffa ancoraggio / Bracket



Article code	Name	Description
1324.2027	M_27/G090	Connessione ad angolo orizzontale 90° per modelli MX0_27, MX1_27, MT1_27 / Horizontal connection corner 90° for all models MX0_27, MX1_27, MT1_27.



Article code	Name	Description
1324.9127.01	M_27/Diffusore Opale L=3m - EMPTY STANDARD	Profilo PC Opale / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura



Article code	Name	Description
1324.91279.01	M_27/Diffusore Prismatico L=3m - EMPTY STANDARD	Profilo PC Prismatico / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura