


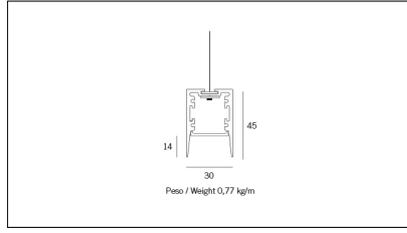




MACROLUX




Article code	Article	Colour	Diffuser	Light Temperature (°K)	Watt (W)	Length (mm)
1324.0127.00.98	MX1_27/DO-98 L=max 3 m	Grey anodize (98)	Opal			
1324.0127.01.98	MX1_27/DO/3000-98 L=3m - EMPTY STANDARD	Grey anodize (98)	Opal			3000
1324.0127.01.M10.98	MX1_27/DO/3000-98 L=3m - 10x EMPTY STANDARD	Grey anodize (98)	Opal			3000
1324.0127.120.2700.98	*MX1_27/DO/2700-98	Grey anodize (98)	Opal	2700	9,6	
1324.0127.120.4000.98	*MX1_27/DO/4000-98	Grey anodize (98)	Opal	4000	9,6	
1324.0127.120.98	MX1_27/DO/9,6W/3000°K-98	Grey anodize (98)	Opal	3000	9,6	
1324.0127.240.2700.98	*MX1_27/DO/2700-98	Grey anodize (98)	Opal	2700	19,6	
1324.0127.240.4000.98	*MX1_27/DO/4000-98	Grey anodize (98)	Opal	4000	19,6	
1324.0127.240.98	MX1_27/DO/19.6W/3000°K-98	Grey anodize (98)	Opal	3000	19,6	
1324.01279.00.98	MX1_27/DP-98 L=max 3 m	Grey anodize (98)	Prismatic			
1324.01279.01.98	MX1_27/DP/3000-98 L=3m - EMPTY STANDARD	Grey anodize (98)	Prismatic			3000
1324.01279.01.M10.98	MX1_27/DP/3000-98 L=3m - 10x EMPTY STANDARD	Grey anodize (98)	Prismatic			3000
1324.01279.120.2700.98	mx1_27 surface/2700-98#	Grey anodize (98)	Prismatic	2700	9,6	
1324.01279.120.4000.98	mx1_27 surface/4000-98#	Grey anodize (98)	Prismatic	4000	9,6	
1324.01279.120.98	mx1_27 surface/3000-98#	Grey anodize (98)	Prismatic	3000	9,6	
1324.01279.240.2700.98	MX1_27/DP/19.6W/2700°K-98	Grey anodize (98)	Prismatic	2700	19,6	
1324.01279.240.4000.98	mx1_27 surface/4000-98#	Grey anodize (98)	Prismatic	4000	19,6	
1324.01279.240.98	mx1_27 surface/3000-98#	Grey anodize (98)	Prismatic	3000	19,6	

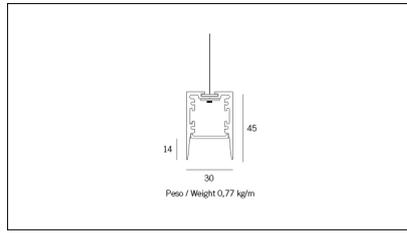


Article code	Article	Colour	Diffuser	Light Temperature (°K)	Watt (W)	Length (mm)
1324.0127.00.94	MX1_27/DO-94 L=max 3 m	White (94)	Opal			
1324.0127.01.94	MX1_27/DO/3000-94 L=3m - EMPTY STANDARD	White (94)	Opal			3000
1324.0127.01.M10.94	MX1_27/DO/3000-94 L=3m - 10x EMPTY STANDARD	White (94)	Opal			3000
1324.0127.120.2700.94	MX1_27/DO/9,6W/2700°K-94	White (94)	Opal	2700	9,6	
1324.0127.120.4000.94	MX1_27/DO/9,6W/4000°K-94	White (94)	Opal	4000	9,6	
1324.0127.120.94	MX1_27/DO/9,6W/3000°K-94	White (94)	Opal	3000	9,6	
1324.0127.240.2700.94	MX1_27/DO/19.6W/2700°K-94	White (94)	Opal	2700	19,6	
1324.0127.240.4000.94	MX1_27/DO/19.6W/4000°K-94	White (94)	Opal	4000	19,6	
1324.0127.240.94	MX1_27/DO/19.6W/3000°K-94	White (94)	Opal	3000	19,6	
1324.01279.00.94	MX1_27/DP-94 L=max 3 m	White (94)	Prismatic			
1324.01279.01.94	MX1_27/DP/3000-94 L=3m - EMPTY STANDARD	White (94)	Prismatic			3000
1324.01279.01.M10.94	MX1_27/DP/3000-94 L=3m - 10x EMPTY STANDARD	White (94)	Prismatic			3000
1324.01279.120.2700.94	MX1_27/DP/9,6W/2700°K-94	White (94)	Prismatic	2700	9,6	
1324.01279.120.4000.94	MX1_27/DP/9,6W/4000°K-94	White (94)	Prismatic	4000	9,6	
1324.01279.120.94	mx1_27 surface/3000-94#	White (94)	Prismatic	3000	9,6	
1324.01279.240.2700.94	MX1_27/DP/19.6W/2700°K-94	White (94)	Prismatic	2700	19,6	
1324.01279.240.4000.94	MX1_27/DP/19.6W/4000°K-94	White (94)	Prismatic	4000	19,6	
1324.01279.240.94	MX1_27/DP/19.6W/3000°K-94	White (94)	Prismatic	3000	19,6	

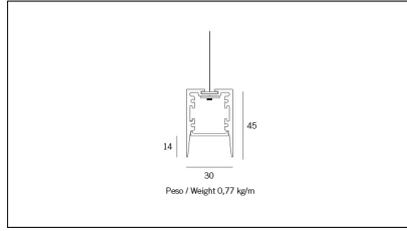


Article code	Article	Colour	Diffuser	Light Temperature (°K)	Watt (W)	Length (mm)
1324.0127.00.92	MX1_27/DO-92 L=max 3 m	Black (92)	Opal			
1324.0127.01.92	MX1_27/DO/3000-92 L=3m - EMPTY STANDARD	Black (92)	Opal			3000
1324.0127.01.M10.92	MX1_27/DO/3000-92 L=3m - 10x EMPTY STANDARD	Black (92)	Opal			3000
1324.0127.120.2700.92	MX1_27/DO/9,6W/2700°K-92	Black (92)	Opal	2700	9,6	
1324.0127.120.4000.92	MX1_27/DO/9,6W/4000°K-92	Black (92)	Opal	4000	9,6	
1324.0127.120.92	MX1_27/DO/9,6W/3000°K-92	Black (92)	Opal	3000	9,6	
1324.0127.240.2700.92	MX1_27/DO/19.6W/2700°K-92	Black (92)	Opal	2700	19,6	
1324.0127.240.4000.92	MX1_27/DO/19.6W/4000°K-92	Black (92)	Opal	4000	19,6	
1324.0127.240.92	MX1_27/DO/19.6W/3000°K-92	Black (92)	Opal	3000	19,6	
1324.01279.00.92	MX1_27/DP-92 L=max 3 m	Black (92)	Prismatic			
1324.01279.01.92	MX1_27/DP/3000-92 L=3m - EMPTY STANDARD	Black (92)	Prismatic			3000
1324.01279.01.M10.92	MX1_27/DP/3000-92 L=3m - 10x EMPTY STANDARD	Black (92)	Prismatic			3000
1324.01279.120.2700.92	mx1_27 surface/2700-92#	Black (92)	Prismatic	2700	9,6	
1324.01279.120.4000.92	mx1_27 surface/4000-92#	Black (92)	Prismatic	4000	9,6	
1324.01279.120.92	mx1_27 surface/3000-92#	Black (92)	Prismatic	3000	9,6	
1324.01279.240.2700.92	MX1_27/DP/19.6W/2700°K-92	Black (92)	Prismatic	2700	19,6	
1324.01279.240.4000.92	mx1_27 surface/4000-92#	Black (92)	Prismatic	4000	19,6	
1324.01279.240.92	MX1_27/DP/19.6W/3000°K-92	Black (92)	Prismatic	3000	19,6	




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	




Article code	Name	Description	Watt (W)	Driver's type
1.024015	Driver LED 24V 15W IP20		15	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024020	Driver LED 24V 20W IP20		20	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024036	Driver LED 24V 36W IP40		36	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024060C	Driver LED 24V 60W IP40		60	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024075	Driver LED 24V 75W IP20		75	On/Off



Article code	Name	Description	Watt (W)	Driver's type
1.97759	Driver LED 24V 150W IP67		150	On/Off



Article code	Name	Description	Watt (W)	Driver's type
1.97745	Driver LED 24V 200W IP67	Dimensioni 69 x 37 x 206 mm	200	On/Off




Article code	Name	Description
1324.3027.1	M_27/GAV	Accessori per giunzione angolare verticale - Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27


200 x 200

Powered by HTML.COM


Article code	Name	Description
1324.4027	M_27/GV270	Connessione ad angolo verticale 270° per modelli MX0_27, MX1_27, MT1_27 / Vertical connection corner 270° for all models MX0_27, MX1_27, MT1_27.




Article code	Name	Description
1324.1027	M_27/GL	Staffa di giunzione lineare - Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27.
1324.1027.10	M_27/GL - 10 PZ	Staffa di giunzione lineare - Compatibile con MX0_27, MX1_27, MT0_27 e MT1_27.




Article code	Name	Description	Colour
1324.9128.4	KA/75/OUT-4	Kit alimentazione con contenitore driver per versione sospesa, MAX 75W, finitura bianco	White (4)




Article code	Name	Description
1324.8127	M_27/KS	Kit sospensione h. 1.8 mt / Hanging kit h. 1.8 mt (1 pz.) - Profilo MX1_27 + MT1_27




Article code	Name	Description
1324.2027	M_27/G090	Connessione ad angolo orizzontale 90° per modelli MX0_27, MX1_27, MT1_27 / Horizontal connection corner 90° for all models MX0_27, MX1_27, MT1_27.




Article code	Name	Description	Colour
1324.6127.98	MX1_27/TC-98	Testata di chiusura, finitura grigio alluminio/ End cap, finishing grey aluminium	Grey anodize (98)
1324.6127.98.10	MX1_27/TC-98 - 10 PZ	Testata di chiusura, finitura grigio alluminio/ End cap, finishing grey aluminium	Grey anodize (98)




Article code	Name	Description	Colour
1324.6127.94	MX1_27/TC-4	Testata di chiusura a vista senza viti, finitura bianco / End cap in sight without screws, finishing white (1 pz.)	White (94)
1324.6127.94.10	MX1_27/TC-4 - 10 PZ	Testata di chiusura finitura bianco	White (94)



Article code	Name	Description	Colour
1324.6127.92	MX1_27/TC-2	Testata di chiusura a vista senza viti, finitura nero / End cap in sight without screws, finishing nero (1 pz.)	Black (92)
1324.6127.92.10	MX1_27/TC-2 - 10 PZ	Testata di chiusura a vista senza viti, finitura nero / End cap in sight without screws, finishing black	Black (92)



Article code	Name	Description
1324.9127.01	M_27/Diffusore Opale L=3m - EMPTY STANDARD	Profilo PC Opale / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura



Article code	Name	Description
1324.91279.01	M_27/Diffusore Prismatico L=3m - EMPTY STANDARD	Profilo PC Prismatico / Compatibile con MX0_27, MT1_27, MT3_27 - Senza taglio a misura