





# MACROLUX

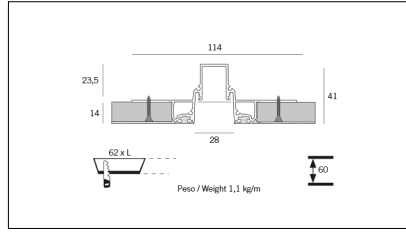


| Article code          | Article                                 | Colour     | Type of recessed | Light Temperature (°K) | Watt (W) | Length (mm) |
|-----------------------|---|------------|------------------|------------------------|----------|-------------|
| 1324.0227.00.94       | MX2_27-94 L=max 3 m                     | White (94) | Plasterboard     |                        |          |             |
| 1324.0227.01.94       | MX2_27/3000-94 L=3m - EMPTY STANDARD    | White (94) | Plasterboard     |                        |          | 3000        |
| 1324.0227.01.M5.94    | MX2_27/3000-94 L=3m - 5x EMPTY STANDARD | White (94) | Plasterboard     |                        |          | 3000        |
| 1324.0227.120.2700.94 | MX2_27/9.6W/2700°K-94                   | White (94) | Plasterboard     | 2700                   | 9,6      |             |
| 1324.0227.120.4000.94 | MX2_27/9.6W/4000°K-94                   | White (94) | Plasterboard     | 4000                   | 9,6      |             |
| 1324.0227.120.94      | MX2_27/9.6W/3000°K-94                   | White (94) | Plasterboard     | 3000                   | 9,6      |             |
| 1324.0227.240.2700.94 | MX2_27/19.6W/2700°K-94                  | White (94) | Plasterboard     | 2700                   | 19,6     |             |
| 1324.0227.240.4000.94 | MX2_27/19.6W/4000°K-94                  | White (94) | Plasterboard     | 4000                   | 19,6     |             |
| 1324.0227.240.94      | MX2_27/19.6W/3000°K-94                  | White (94) | Plasterboard     | 3000                   | 19,6     |             |




| Article code | Name             | Description  |
|--------------|------------------|--|
| 1312.1030    | ML_30/GL         | Staffe di giunzione lineare - Compatibile con ML_30, MT2_27 e MX2_27 |
| 1312.1030.10 | ML_30/GL - 10 PZ | Staffe di giunzione lineare - Compatibile con ML_30, MT2_27 e MX2_27 |




| Article code | Name                                     | Description |
|--------------|--|-------------|
| 1324.0000    | STRIP LED/Primer monouso 0,66 ml         |             |
| 1324.0000.10 | STRIP LED/Primer monouso 0,66 ml - 10 PZ |             |



| Article code | Name                    | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024015     | Driver LED 24V 15W IP20 |             | 15       | On/Off        |




| Article code | Name                    | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024020     | Driver LED 24V 20W IP20 |             | 20       | On/Off        |




| Article code | Name                    | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024036     | Driver LED 24V 36W IP40 |             | 36       | On/Off        |




| Article code | Name                    | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024060C    | Driver LED 24V 60W IP40 |             | 60       | On/Off        |




| Article code | Name                    | Description | Watt (W) | Driver's type |
|--------------|-------------------------|-------------|----------|---------------|
| 1.024075     | Driver LED 24V 75W IP20 |             | 75       | On/Off        |



| Article code | Name                     | Description | Watt (W) | Driver's type |
|--------------|--------------------------|-------------|----------|---------------|
| 1.97759      | Driver LED 24V 150W IP67 |             | 150      | On/Off        |



| Article code | Name                     | Description                 | Watt (W) | Driver's type |
|--------------|--------------------------|-----------------------------|----------|---------------|
| 1.97745      | Driver LED 24V 200W IP67 | Dimensioni 69 x 37 x 206 mm | 200      | On/Off        |



| Article code    | Name                | Description   | Colour     |
|-----------------|---------------------|---|------------|
| 1324.5227.94    | MX2_27/TC-4         | Testata di chiusura, finitura bianco / End cap, finishing white (1 pz.) | White (94) |
| 1324.5227.94.10 | MX2_27/TC-4 - 10 PZ | Testata di chiusura, finitura bianco / End cap, finishing white         | White (94) |



| Article code | Name                      | Description  |
|--------------|---------------------------|--|
| 1324.2227    | MX2_27/G090 (Solo taglio) | Taglio ad angolo orizzontale 90° / Horizontal corner's cut 90° |




| Article code | Name                      | Description  |
|--------------|---------------------------|--|
| 1324.3227    | MX2_27/GV90 (Solo taglio) | Taglio ad angolo verticale 90° / Vertical corner's cut 90° |


200 x 200

Powered by HTML.COM


| Article code | Name                       | Description  |
|--------------|----------------------------|--|
| 1324.4227    | MX2_27/GV270 (Solo taglio) | Taglio ad angolo verticale 270° / Vertical corner's cut 270° |




| Article code | Name                   | Description   | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|------------------------|---|----------|------------------------|-------------|
| 1310.27.300  | MKT_27/300/7,5W/3000°K | Profilo alluminio L=300 mm 7,5W 24V 950lm 3000°K<br>CRI>90 - Driver escluso | 7,5      | 3000                   | 300         |




| Article code | Name                  | Description   | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|-----------------------|---|----------|------------------------|-------------|
| 1310.27.600  | MKT_27/600/15W/3000°K | Profilo alluminio L=600 mm 15W 24V 1900lm 3000°K<br>CRI>90 - Driver escluso | 15       | 3000                   | 600         |



| Article code | Name                    | Description  | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|-------------------------|--|----------|------------------------|-------------|
| 1310.27.900  | MKT_27/900/22,5W/3000°K | Profilo alluminio L=900 mm 22,5W 24V 2850lm 3000°K CRI>90 - Driver escluso | 22.5     | 3000                   | 900         |




| Article code | Name                   | Description   | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|------------------------|---|----------|------------------------|-------------|
| 1310.27.1200 | MKT_27/1200/30W/3000°K | Profilo alluminio L=1200 mm 30W 24V 3800lm 3000°K CRI>90 - Driver escluso | 30       | 3000                   | 1200        |




| Article code | Name                     | Description   | Watt (W) | Light Temperature (°K) | Length (mm) |
|--------------|--------------------------|---|----------|------------------------|-------------|
| 1310.27.1500 | MKT_27/1500/37,5W/3000°K | Profilo alluminio L=1500 mm 37,5W 24V 4750lm 3000°K CRI>90 - Driver escluso | 37.5     | 3000                   | 1500        |



| Article code | Name      | Description                        | Length (mm) |
|--------------|-----------|------------------------------------|-------------|
| 1310.27.00   | MKT_27/CA | Cavo 24V di alimentazione L=500 mm | 500         |



| Article code | Name      | Description                                      |
|--------------|-----------|--|
| 1324.7227.1  | M2_27/KEY | Chiave per fissaggio per MA2_35, MX2_27 e MT2_27 |



| Article code | Name  | Description  |
|--------------|---|--|
| 1324.9227.01 | M2_27/Diffusore Opale L=3m - EMPTY STANDARD | Profilo PC Opale / Compatibile con MX2_27 e MT2_27 - Senza taglio a misura |