MACROLUX
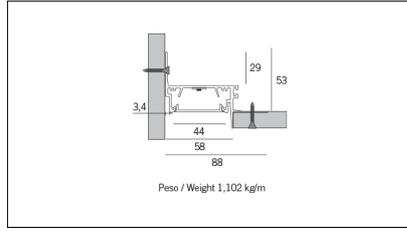

| Article code	Article	Colour	Type of recessed	Light Temperature (°K)	Watt (W)	Length (mm)
1312.0045.00.94	ML_45/DO-94 L=max 3m	White (94)	Plasterboard			
1312.0045.01.94	ML_45/DO/3000-94 L=3m - EMPTY STANDARD	White (94)	Plasterboard			3000
1312.0045.120.2700.94	ML_45/9,6W/2700°K-94	White (94)	Plasterboard	2700	9,6	
1312.0045.120.4000.94	ML_45/9,6W/4000°K-94	White (94)	Plasterboard	4000	9,6	
1312.0045.120.94	ML_45/9,6W/3000°K-94	White (94)	Plasterboard	3000	9,6	
1312.0045.240.2700.94	ML_45/19.6W/2700°K-94	White (94)	Plasterboard	2700	19,6	
1312.0045.240.4000.94	ML_45/DO/19.6W/4000°K-94	White (94)	Plasterboard	4000	19,6	
1312.0045.240.94	ML_45/DO/19,6W/3000°K-94	White (94)	Plasterboard	3000	19,6	

Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	

Article code	Name	Description	Watt (W)	Driver's type
1.024015	Driver LED 24V 15W IP20		15	On/Off

Article code	Name	Description	Watt (W)	Driver's type
1.024020	Driver LED 24V 20W IP20		20	On/Off

Article code	Name	Description	Watt (W)	Driver's type
1.024036	Driver LED 24V 36W IP40		36	On/Off

Article code	Name	Description	Watt (W)	Driver's type
1.024060C	Driver LED 24V 60W IP40		60	On/Off

Article code	Name	Description	Watt (W)	Driver's type
1.024075	Driver LED 24V 75W IP20		75	On/Off

Article code	Name	Description	Watt (W)	Driver's type
1.97759	Driver LED 24V 150W IP67		150	On/Off

| Article code	Name	Description	Watt (W)	Driver's type
1.97745	Driver LED 24V 200W IP67	Dimensioni 69 x 37 x 206 mm	200	On/Off

Article code	Name	Description
1312.1020	ML_20/GL	Staffa di giunzione lineare - Compatibile con ML_45
1312.1020.10	ML_20/GL - 10 PZ	Staffa di giunzione lineare - Compatibile con ML_45

Article code	Name	Description	Colour
1312.5045.94	ML_45/TC-4	Testata di chiusura, finitura bianco / End cap, finishing white	White (94)
1312.5045.94.10	ML_45/TC-4 - 10 PZ	Testata di chiusura, finitura bianco / End cap, finishing white (10 pz.)	White (94)

Article code	Name	Description
1324.9145.01	M_45/Diffusore Opale L=3m - EMPTY STANDARD	Profilo PC Opale / Compatibile con MX_45, MT_45, MD_45, ML_45 - Senza taglio a misura

Article code	Name	Description
1324.91459.01	M_45/Diffusore Prismatizzato L=3m - EMPTY STANDARD	Profilo PC Prismatizzato / Compatibile con MX_45, MT_45, MD_45, ML_45 - Senza taglio a misura