




MACROLUX




Article code	Article	Colour	Light Temperature (°K)	Length (mm)	Watt (W)
1324.0270.1000.2700.94	*MX2_70	White (94)	2700	1000	39,2
1324.0270.1000.4000.94	*MX2_70	White (94)	4000	1000	39,2
1324.0270.1000.94	MX2_70/1020/LED/37W-94	White (94)	3000	1000	39,2
1324.0270.1500.2700.94	*MX2_70	White (94)	2700	1500	58,8
1324.0270.1500.4000.94	*MX2_70	White (94)	4000	1500	58,8
1324.0270.1500.94	MX2_70/1520/LED/56W-94	White (94)	3000	1500	58,8
1324.0270.500.2700.94	*MX2_70	White (94)	2700	500	19,6
1324.0270.500.4000.94	*MX2_70	White (94)	4000	500	19,6
1324.0270.500.94	MX2_70/520/LED/18.5W-94	White (94)	3000	500	19,6
1324.0270.K1200.2700.94	mx2_70/1200/2700-94#	White (94)	2700	1200	24,4
1324.0270.K1200.4000.94	*MX2_70	White (94)	4000	1200	24,4
1324.0270.K1200.94	*MX2_70	White (94)	3000	1200	24,4
1324.0270.K1500.2700.94	mx2_70/1500/2700-94#	White (94)	2700	1500	30,5
1324.0270.K1500.4000.94	*MX2_70	White (94)	4000	1500	30,5
1324.0270.K1500.94	*MX2_70	White (94)	3000	1500	30,5
1324.0270.K600.2700.94	mx2_70/600/2700-94#	White (94)	2700	600	12,2
1324.0270.K600.4000.94	*MX2_70	White (94)	4000	600	12,2
1324.0270.K600.94	MX2_70/620/LED/12.2W-94	White (94)	3000	600	12,2
1324.170.0001.94	MX2_70-94 L=max 3m	White (94)			

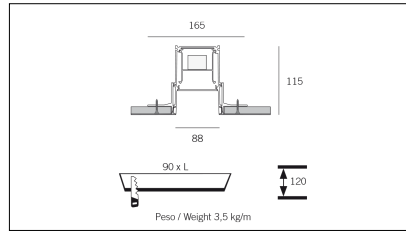


Article code	Name	Description
1324.170.0031	[MX2_70] Taglio ad angolo verticale 90°	Connessione ad angolo verticale 90° / Vertical connection corner 90°




Article code	Name	Description	Light Temperature (°K)	Watt (W)	Length (mm)	Driver's type
1324.0270.K600	MX2_70/600/MKC/12,2W/700mA/3000°K	Profilo alluminio L=600 mm 12,2W 700mA 1700lm 3000°K CRI>90 - Driver incluso	3000	12.2	600	On/Off




Article code	Name	Description	Light Temperature (°K)	Watt (W)	Length (mm)	Driver's type
1324.0270.K600.4000	*MX2_70		4000	12.2	600	On/Off




Article code	Name	Description	Light Temperature (°K)	Watt (W)	Length (mm)	Driver's type
1324.0270.K1200	MX2_70/1200/MKC/24,4W/3000°K	L=1200 mm 24,4W 700mA 3400lm 3000°K CRI>90 - Driver incluso	3000	24.4	1200	On/Off




Article code	Name	Description	Light Temperature (°K)	Watt (W)	Length (mm)	Driver's type
1324.0270.K1200.4000	*MX2_70		4000	24.4	1200	On/Off




Article code	Name	Description	Light Temperature (°K)	Watt (W)	Length (mm)	Driver's type
1324.0270.K1500.2700	mx2_70 mkc		2700	30.5	1500	On/Off




Article code	Name	Description	Light Temperature (°K)	Watt (W)	Length (mm)	Driver's type
1324.0270.K1500	MX2_70/1500/MKC/30,5W/3000°K	L=1500 mm 30,5W 700mA 4250lm 3000°K CRI>90 - Driver incluso	3000	30.5	1500	On/Off




Article code	Name	Description	Light Temperature (°K)	Watt (W)	Length (mm)	Driver's type
1324.0270.K1500.4000	*MX2_70		4000	30.5	1500	On/Off




Article code	Name	Description	Light Temperature (°K)	Watt (W)	Driver's type	Length (mm)
1324.0270.500.2700	mx2_70 Kit elettrico		2700	18.5	On/Off	500




Article code	Name	Description	Light Temperature (°K)	Watt (W)	Driver's type	Length (mm)
1324.0270.500	MX2_70/500/KIT LED/18.5W	Kit led lunghezza L=500, 2x 18.5W/m, 24V, 3000°K - Driver incluso	3000	18.5	On/Off	500



Article code	Name	Description	Light Temperature (°K)	Watt (W)	Driver's type	Length (mm)
1324.0270.1500.4000	*MX2_70		4000	56	On/Off	1500



Article code	Name	Description	Colour
1324.170.0010.94	MX2_70/TC-94	Testata di chiusura, finitura bianco / End cap, finishing white (1 pz.)	White (94)



Article code	Name	Description
1324.170.0020	MX2_70/GL	Staffa di giunzione lineare 180° / Linear bracket connection 180°

200 x 200

Powered by HTML.COM

Article code	Name	Description
1324.170.0030	[MX2_70] Taglio ad angolo orizzontale 90°	Connessione ad angolo orizzontale 90° / Horizontal connection corner 90°