


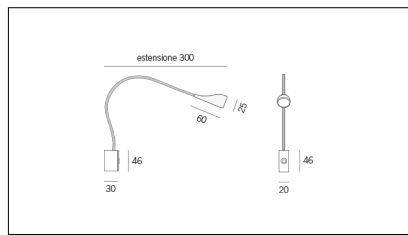



MACROLUX




Article code	Article	Colour	Watt (W)	Light Temperature (°K)	Beam angle (°)	Current
1621.0001.22	PU-22	Black (2)	1,2	3000	30	350mA

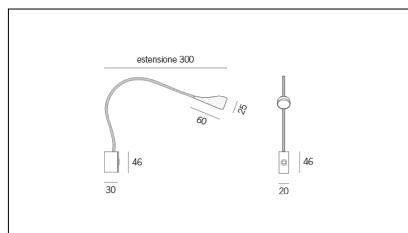


Article code	Article	Colour	Watt (W)	Light Temperature (°K)	Beam angle (°)	Current
1621.0001.44	PU-44	White (4)	1,2	3000	30	350mA




Article code	Name	Description	Watt (W)	Current	Driver's type
1.122426	DC MICRO JOLLY 6W 350mA 1-10V / PUSH	Alimentatore elettronico dimmerabile 1-10V / PUSH in corrente continua costante 350mA max 6W	6	350mA	1...10V - PUSH




Article code	Name	Description	Colour
1621.0010.2	PU/503-2	Punto placca per 503 nero	Black (2)




Article code	Name	Description	Colour
1621.0010.4	PU/503-4	Punto placca per 503 bianco	White (4)



Article code	Name	Description	Colour
1621.0011.2	PU/PR-2	Punto placca per scatola versione tonda "tedesca" nera	Black (2)



Article code	Name	Description	Colour
1621.0011.4	PU/PR-4	Punto placca per scatola versione tonda "tedesca" bianca	White (4)



Article code	Name	Description	Watt (W)	Current	Driver's type
1.122598	DC 8W 350mA BULL/U	Alimentatore Led 350mA 8W - Tensione Nominale 100 ÷ 240 V	8	350mA	On/Off