


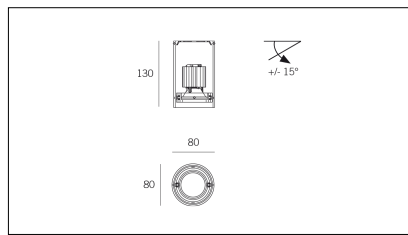




MACROLUX





| Article code | Article | Colour | Light Temperature (°K) | Watt (W) | Beam angle (°) |
|-----------------------|----------------------------------|-----------|------------------------|----------|----------------|
| 321.0022.01.20.2 | CUBE/T-2 6W max 350mA 20° | Black (2) | 3000 | 6 | 20 |
| 321.0022.01.40.2 | CUBE/T-2 6W max 350mA 40° | Black (2) | 3000 | 6 | 40 |
| 321.0022.01.4000.20.2 | *CUBE | Black (2) | 4000 | 6 | 20 |
| 321.0022.01.4000.40.2 | CUBE/T-2 6W max 350mA 40° 4000°K | Black (2) | 4000 | 6 | 40 |

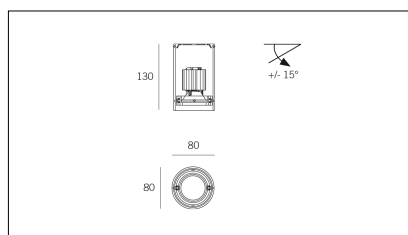


| Article code | Article | Colour | Light Temperature (°K) | Watt (W) | Beam angle (°) |
|-----------------------|---------------------------|-----------|------------------------|----------|----------------|
| 321.0022.01.20.4 | CUBE/T-4 6W max 350mA 20° | White (4) | 3000 | 6 | 20 |
| 321.0022.01.40.4 | CUBE/T-4 6W max 350mA 40° | White (4) | 3000 | 6 | 40 |
| 321.0022.01.4000.20.4 | *CUBE | White (4) | 4000 | 6 | 20 |
| 321.0022.01.4000.40.4 | *CUBE | White (4) | 4000 | 6 | 40 |

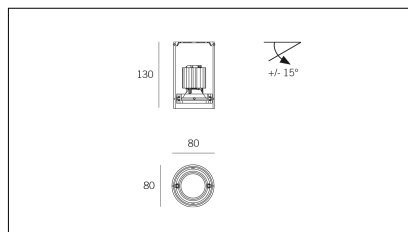

| Article code | Article | Colour | Beam angle (°) | Light Temperature (°K) | Watt (W) |
|-----------------------|---------|-----------|----------------|------------------------|----------|
| 321.0022.01.2700.20.2 | *CUBE | Black (2) | 20 | 2700 | 6 |
| 321.0022.01.2700.40.2 | *CUBE | Black (2) | 40 | 2700 | 6 |

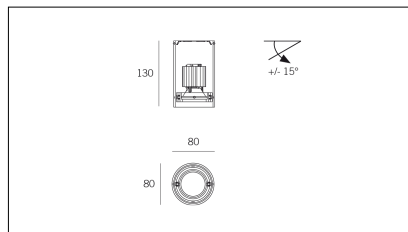

| Article code | Article | Colour | Beam angle (°) | Light Temperature (°K) | Watt (W) |
|-----------------------|----------------------------------|-----------|----------------|------------------------|----------|
| 321.0022.01.2700.20.4 | *CUBE | White (4) | 20 | 2700 | 6 |
| 321.0022.01.2700.40.4 | CUBE/T-4 6W max 350mA 40° 2700°K | White (4) | 40 | 2700 | 6 |



| Article code | Name | Description | Watt (W) | Current |
|--------------|-------------------------|--|----------|---------|
| 1.122426 | DC MICRO JOLLY 6W 350mA | Alimentatore elettronico regolabile in corrente continua 6W 24V 350mA costanti | 6 | 350mA |