


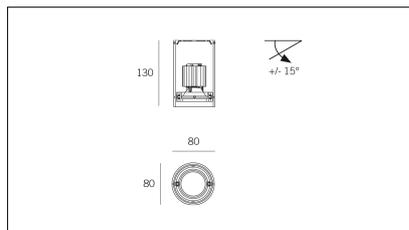




MACROLUX





Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Watt (W)
321.0022.01.20.2	CUBE/T-2 5.8W max 350mA 25°	Black (2)	3000	25	5,8
321.0022.01.40.2	CUBE/T-2 5.8W max 350mA 40°	Black (2)	3000	40	5,8
321.0022.01.4000.20.2	CUBE/T-2 5.8W max 350mA 25° 4000°K	Black (2)	4000	25	5,8
321.0022.01.4000.40.2	CUBE/T-2 5.8W max 350mA 40° 4000°K	Black (2)	4000	40	5,8

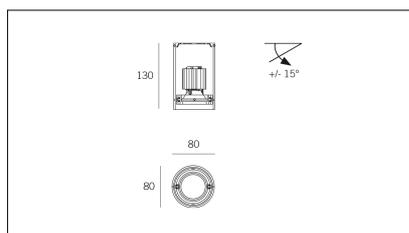


Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Watt (W)
321.0022.01.20.4	CUBE/T-4 5.8W max 350mA 25°	White (4)	3000	25	5,8
321.0022.01.40.4	CUBE/T-4 5.8W max 350mA 40°	White (4)	3000	40	5,8
321.0022.01.4000.20.4	*CUBE	White (4)	4000	25	5,8
321.0022.01.4000.40.4	*CUBE	White (4)	4000	40	5,8

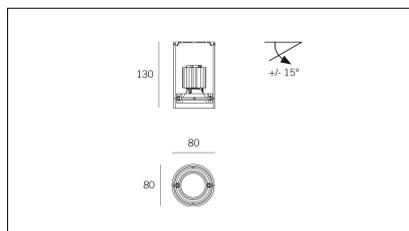


Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Watt (W)
321.0022.01.2700.20.2	*CUBE	Black (2)	2700	25	5,8
321.0022.01.2700.40.2	*CUBE	Black (2)	2700	40	5,8

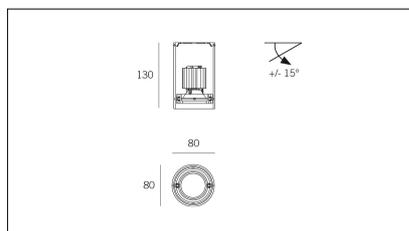

Article code	Article	Colour	Light Temperature (°K)	Beam angle (°)	Watt (W)
321.0022.01.2700.20.4	CUBE/T-4 5.8W max 350mA 25° 2700°K	White (4)	2700	25	5,8
321.0022.01.2700.40.4	CUBE/T-4 5.8W max 350mA 40° 2700°K	White (4)	2700	40	5,8



Article code	Name	Description	Watt (W)	Current	Driver's type
1.122598	DC 8W 350mA BULL/U	Alimentatore Led 350mA 8W - Tensione Nominale 100 ÷ 240 V	8	350mA	On/Off



Article code	Name	Description	Watt (W)	Current	Driver's type
1.125403	MINI JOLLY DALI 20	Alimentatore elettronico multicolorrente-multitensione regolabile in corrente continua per LED 250mA/12W 350mA/17W 500mA/20W Tensione di rete 110-220V Dimmerabile DALI 2 Dimensioni: 110x52 H22	20	Multi-current	DALI 2