


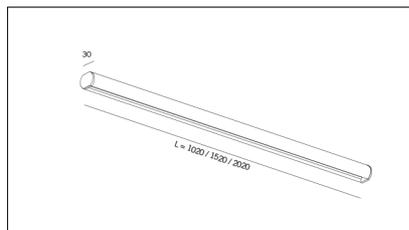



# MACROLUX




Article code	Article	Colour	Light Temperature (°K)	Watt (W)
1318.0012.00.92	MR_12-92 L=max 3 m	Black (92)		
1318.0012.120.2700.92	MR_12/9.6W/2700°K-92	Black (92)	2700	9,6
1318.0012.120.4000.92	MR_12/9.6W/4000°K-92	Black (92)	4000	9,6
1318.0012.120.92	MR_12/9.6W/3000°K-92	Black (92)	3000	9,6
1318.0012.240.2700.92	MR_12/19.6W/2700°K-92	Black (92)	2700	19,6
1318.0012.240.4000.92	MR_12/19.6W/4000°K-92	Black (92)	4000	19,6
1318.0012.240.92	MR_12/19.6W/3000°K-92	Black (92)	3000	19,6

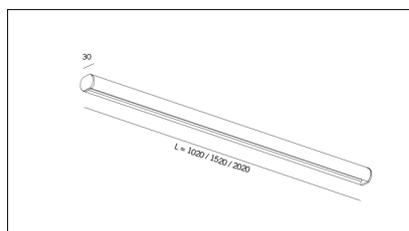

Article code	Article	Colour	Light Temperature (°K)	Watt (W)
1318.0012.00.94	MR_12-94 L=max 3 m	White (94)		
1318.0012.120.2700.94	MR_12/9.6W/2700°K-94	White (94)	2700	9,6
1318.0012.120.4000.94	MR_12/9.6W/4000°K-94	White (94)	4000	9,6
1318.0012.120.94	MR_12/9.6W/3000°K-94	White (94)	3000	9,6
1318.0012.240.2700.94	MR_12/19.6W/2700°K-94	White (94)	2700	19,6
1318.0012.240.4000.94	MR_12/19.6W/4000°K-94	White (94)	4000	19,6
1318.0012.240.94	MR_12/19.6W/3000°K-94	White (94)	3000	19,6

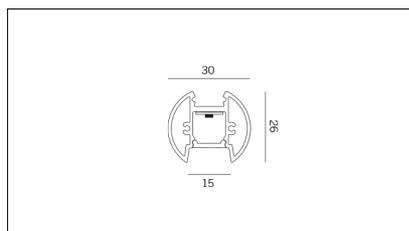


Article code	Article	Colour	Length (mm)
1318.0012.01.92	MR_12/3000-92 L=3m - EMPTY STANDARD	Black (92)	3000
1318.0012.01.M15.92	MR_12/3000-92 L=3m - 15x EMPTY STANDARD	Black (92)	3000

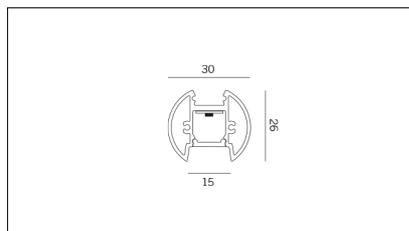


Article code	Article	Colour	Length (mm)
1318.0012.01.94	MR_12/3000-94 L=3m - EMPTY STANDARD	White (94)	3000


Article code	Article	Colour	Length (mm)
1318.0012.01.M15.94	MR_12/3000-94 L=3m - 15x EMPTY STANDARD	White (94)	3000




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	




Article code	Name	Description
1320.1112	UNIVERSALE M_12 / MB_15	Ancoraggio plafone / giunto lineare - Compatibile con MTO_12, MT1_12, MX1_12 e MB_15
1320.1112.10	UNIVERSALE M_12/MB_15 - 10 PZ	Ancoraggio plafone / giunto lineare




Article code	Name	Description	Colour
1318.6012.92	MR_12/TC-2	Testata di chiusura, finitura nera / End cap, finishing black (1 pz.)	Black (92)
1318.6012.92.10	MR_12/TC-2 - 10 PZ	Testata di chiusura, finitura nera / End cap, finishing black	Black (92)




Article code	Name	Description	Colour
1318.6012.94	MR_12/TC-4	Testata di chiusura, finitura bianco / End cap, finishing white (1 pz.)	White (94)
1318.6012.94.10	MR_12/TC-4 - 10 PZ	Testata di chiusura, finitura bianca / End cap, finishing white	White (94)




Article code	Name	Description	Watt (W)	Driver's type
1.024015	Driver LED 24V 15W IP20		15	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024020	Driver LED 24V 20W IP20		20	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024036	Driver LED 24V 36W IP40		36	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024060C	Driver LED 24V 60W IP40		60	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024075	Driver LED 24V 75W IP20		75	On/Off



Article code	Name	Description	Watt (W)	Driver's type
1.97759	Driver LED 24V 150W IP67		150	On/Off



Article code	Name	Description	Watt (W)	Driver's type
1.97745	Driver LED 24V 200W IP67	Dimensioni 69 x 37 x 206 mm	200	On/Off



Article code	Name	Description
1324.9212.01	M2_12/Diffusore Opale L=3m - EMPTY STANDARD	Profilo PC Opale / Compatibile con MT0_12, MT1_12, MX1_12, MT2_12, MX2_12, MC_90 e MC_270 - Senza taglio a misura