


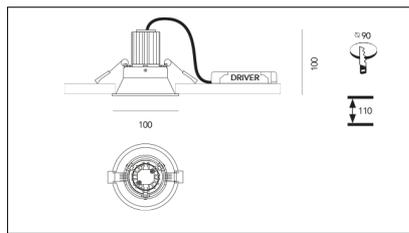


MACROLUX



Article code	Article	Colour	Beam angle (°)	Light Temperature (°K)	Type of recessed	Watt (W)
1518.0001.02.14.2	*ORION	Black (2)	14	3000	Plasterboard	8,6
1518.0001.02.25.2	ORION/LED-2 8.6W 500mA 25°	Black (2)	25	3000	Plasterboard	8,6
1518.0001.02.2700.14.2	*ORION	Black (2)	14	2700	Plasterboard	8,6
1518.0001.02.2700.25.2	ORION/LED-2 8.6W 500mA 25° 2700°K	Black (2)	25	2700	Plasterboard	8,6
1518.0001.02.2700.35.2	ORION/LED-2 8.6W 500mA 34° 2700°K	Black (2)	34	2700	Plasterboard	8,6
1518.0001.02.35.2	ORION/LED-2 8.6W 500mA 34°	Black (2)	34	3000	Plasterboard	8,6
1518.0001.02.4000.14.2	*ORION	Black (2)	14	4000	Plasterboard	8,6
1518.0001.02.4000.25.2	*ORION	Black (2)	25	4000	Plasterboard	8,6
1518.0001.02.4000.35.2	ORION/LED-2 8.6W 500mA 34° 4000°K	Black (2)	34	4000	Plasterboard	8,6
1518.0001.08.14.2	*ORION	Black (2)	14	3000	Plasterboard	8,6
1518.0001.08.25.2	ORION/LED-2 8.6W 500mA 25° DALI	Black (2)	25	3000	Plasterboard	8,6
1518.0001.08.2700.14.2	ORION/LED-2 8.6W 500mA 14° 2700°K DALI	Black (2)	14	2700	Plasterboard	8,6
1518.0001.08.2700.25.2	ORION/LED-2 8.6W 500mA 25° 2700°K DALI	Black (2)	25	2700	Plasterboard	8,6
1518.0001.08.2700.35.2	ORION/LED-2 8.6W 500mA 34° 2700°K DALI	Black (2)	34	2700	Plasterboard	8,6
1518.0001.08.35.2	ORION/LED-2 8.6W 500mA 34° DALI	Black (2)	34	3000	Plasterboard	8,6
1518.0001.08.4000.14.2	*ORION	Black (2)	14	4000	Plasterboard	8,6
1518.0001.08.4000.25.2	*ORION	Black (2)	25	4000	Plasterboard	8,6
1518.0001.08.4000.35.2	*ORION	Black (2)	34	4000	Plasterboard	8,6

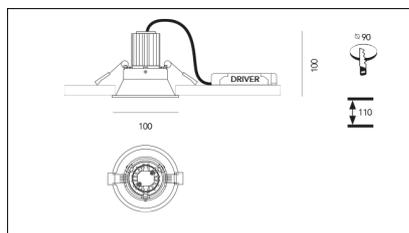

Article code	Article	Colour	Beam angle (°)	Light Temperature (°K)	Type of recessed	Watt (W)
1518.0001.02.14.4	ORION/LED-4 8.6W 500mA 14°	White (4)	14	3000	Plasterboard	8,6
1518.0001.02.25.4	ORION/LED-4 8.6W 500mA 25°	White (4)	25	3000	Plasterboard	8,6
1518.0001.02.2700.14.4	ORION/LED-4 8.6W 500mA 14° 2700°K	White (4)	14	2700	Plasterboard	8,6
1518.0001.02.2700.25.4	*ORION	White (4)	25	2700	Plasterboard	8,6
1518.0001.02.2700.35.4	ORION/LED-4 8.6W 500mA 34° 2700°K	White (4)	34	2700	Plasterboard	8,6
1518.0001.02.35.4	ORION/LED-4 8.6W 500mA 34°	White (4)	34	3000	Plasterboard	8,6
1518.0001.02.4000.14.4	*ORION	White (4)	14	4000	Plasterboard	8,6
1518.0001.02.4000.25.4	*ORION	White (4)	25	4000	Plasterboard	8,6
1518.0001.02.4000.35.4	ORION/LED-4 8.6W 500mA 34° 4000°K	White (4)	34	4000	Plasterboard	8,6
1518.0001.08.14.4	ORION/LED-4 8.6W 500mA 14° DALI	White (4)	14	3000	Plasterboard	8,6
1518.0001.08.25.4	ORION/LED-4 8.6W 500mA 25° DALI	White (4)	25	3000	Plasterboard	8,6
1518.0001.08.2700.14.4	ORION/LED-4 8.6W 500mA 14° 2700°K DALI	White (4)	14	2700	Plasterboard	8,6
1518.0001.08.2700.25.4	ORION/LED-4 8.6W 500mA 25° 2700°K DALI	White (4)	25	2700	Plasterboard	8,6
1518.0001.08.2700.35.4	*ORION	White (4)	34	2700	Plasterboard	8,6
1518.0001.08.35.4	ORION/LED-4 8.6W 500mA 34° DALI	White (4)	34	3000	Plasterboard	8,6
1518.0001.08.4000.14.4	*ORION	White (4)	14	4000	Plasterboard	8,6
1518.0001.08.4000.25.4	*ORION	White (4)	25	4000	Plasterboard	8,6
1518.0001.08.4000.35.4	ORION/LED-4 8.6W 500mA 34° 4000°K DALI	White (4)	34	4000	Plasterboard	8,6