


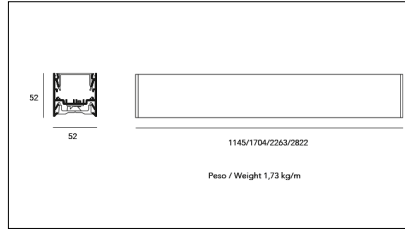



MACROLUX



Article code	Article	Colour	Light Temperature (°K)	Length (mm)	Type Lens	Watt (W)
2211.1145.01.07.92	WL/PL/1145/M60°/3000°K-92	Black (92)	3000	1145	Medium 60° UGR	22
2211.1145.01.4000.07.92	WL/PL/1145/M60°/4000°K-92	Black (92)	4000	1145	Medium 60° UGR	22
2211.1145.08.07.92	WL/PL/1145/M60°/3000°K-92 DALI/PUSH	Black (92)	3000	1145	Medium 60° UGR	22
2211.1145.08.4000.07.92	worklife surface mounted/1145/4000-92#	Black (92)	4000	1145	Medium 60° UGR	22
2211.1704.01.07.92	WL/PL/1704/M60°/3000°K-92	Black (92)	3000	1704	Medium 60° UGR	33
2211.1704.01.4000.07.92	WL/PL/1704/M60°/4000°K-92	Black (92)	4000	1704	Medium 60° UGR	33
2211.1704.08.07.92	WL/PL/1704/M60°/3000°K-92 DALI/PUSH	Black (92)	3000	1704	Medium 60° UGR	33
2211.1704.08.4000.07.92	worklife surface mounted/1704/4000-92#	Black (92)	4000	1704	Medium 60° UGR	33
2211.2263.01.07.92	WL/PL/2263/M60°/3000°K-92	Black (92)	3000	2263	Medium 60° UGR	44
2211.2263.01.4000.07.92	WL/PL/2263/M60°/4000°K-92	Black (92)	4000	2263	Medium 60° UGR	44
2211.2263.08.07.92	WL/PL/2263/M60°/3000°K-92 DALI/PUSH	Black (92)	3000	2263	Medium 60° UGR	44
2211.2263.08.4000.07.92	worklife surface mounted/2263/4000-92#	Black (92)	4000	2263	Medium 60° UGR	44
2211.2822.01.07.92	WL/PL/2822/M60°/3000°K-92	Black (92)	3000	2822	Medium 60° UGR	55
2211.2822.01.4000.07.92	WL/PL/2822/M60°/4000°K-92	Black (92)	4000	2822	Medium 60° UGR	55
2211.2822.08.07.92	WL/PL/2822/M60°/3000°K-92 DALI/PUSH	Black (92)	3000	2822	Medium 60° UGR	55
2211.2822.08.4000.07.92	WL/PL/2822/M60°/4000°K-92 DALI/PUSH	Black (92)	4000	2822	Medium 60° UGR	55

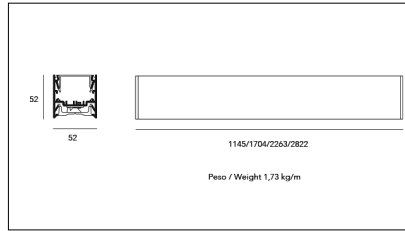

Article code	Article	Colour	Light Temperature (°K)	Length (mm)	Type Lens	Watt (W)
2211.1145.01.07.94	WL/PL/1145/M60°/3000°K-94	White (94)	3000	1145	Medium 60° UGR	22
2211.1145.01.4000.07.94	WL/PL/1145/M60°/4000°K-94	White (94)	4000	1145	Medium 60° UGR	22
2211.1145.08.07.94	WL/PL/1145/M60°/3000°K-94 DALI/PUSH	White (94)	3000	1145	Medium 60° UGR	22
2211.1145.08.4000.07.94	worklife surface mounted/1145/4000-94#	White (94)	4000	1145	Medium 60° UGR	22
2211.1704.01.07.94	WL/PL/1704/M60°/3000°K-94	White (94)	3000	1704	Medium 60° UGR	33
2211.1704.01.4000.07.94	WL/PL/1704/M60°/4000°K-94	White (94)	4000	1704	Medium 60° UGR	33
2211.1704.08.07.94	WL/PL/1704/M60°/3000°K-94 DALI/PUSH	White (94)	3000	1704	Medium 60° UGR	33
2211.1704.08.4000.07.94	worklife surface mounted/1704/4000-94#	White (94)	4000	1704	Medium 60° UGR	33
2211.2263.01.07.94	WL/PL/2263/M60°/3000°K-94	White (94)	3000	2263	Medium 60° UGR	44
2211.2263.01.4000.07.94	worklife surface mounted/2263/4000-94#	White (94)	4000	2263	Medium 60° UGR	44
2211.2263.08.07.94	WL/PL/2263/M60°/3000°K-94 DALI/PUSH	White (94)	3000	2263	Medium 60° UGR	44
2211.2263.08.4000.07.94	worklife surface mounted/2263/4000-94#	White (94)	4000	2263	Medium 60° UGR	44
2211.2822.01.07.94	WL/PL/2822/M60°/3000°K-94	White (94)	3000	2822	Medium 60° UGR	55
2211.2822.01.4000.07.94	WL/PL/2822/M60°/4000°K-94	White (94)	4000	2822	Medium 60° UGR	55
2211.2822.08.07.94	WL/PL/2822/M60°/3000°K-94 DALI/PUSH	White (94)	3000	2822	Medium 60° UGR	55
2211.2822.08.4000.07.94	worklife surface mounted/2822/4000-94#	White (94)	4000	2822	Medium 60° UGR	55