




# MACROLUX

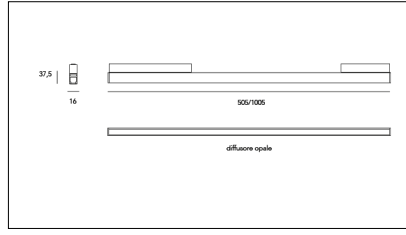

Codice Articolo	Articolo	Colore	Lunghezza (mm)	Temperatura Luce (°K)	Potenza (W)
411.0648.1000.01.2700.92	MINILINE/1000/2700°K-92 DALI	Nero (92)	1005	2700	24,6
411.0648.1000.01.92	MINILINE/1000/3000°K-92 DALI	Nero (92)	1005	3000	24,6
411.0648.1000.2700.92	*MINILINE/1000/2700°K-92	Nero (92)	1005	2700	24,6
411.0648.1000.92	MINILINE/1000/3000°K-92	Nero (92)	1005	3000	24,6
411.0648.500.01.2700.92	MINILINE/500/2700°K-92 DALI	Nero (92)	505	2700	12,3
411.0648.500.01.92	MINILINE/500/3000°K-92 DALI	Nero (92)	505	3000	12,3
411.0648.500.2700.92	MINILINE/500/2700°K-92	Nero (92)	505	2700	12,3
411.0648.500.92	MINILINE/500/3000°K-92	Nero (92)	505	3000	12,3

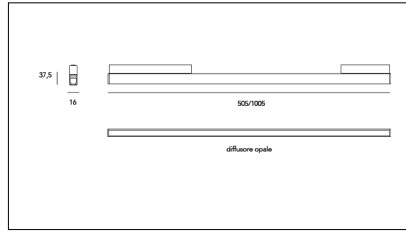

Codice Articolo	Articolo	Colore	Temperatura Luce (°K)	Lunghezza (mm)	Potenza (W)
411.0648.1000.01.2700.94	MINILINE/1000/2700°K-94 DALI	Bianco (94)	2700	1005	24,6
411.0648.1000.01.94	MINILINE/1000/3000°K-94 DALI	Bianco (94)	3000	1005	24,6
411.0648.1000.2700.94	MINILINE/1000/2700°K-94	Bianco (94)	2700	1005	24,6
411.0648.1000.94	MINILINE/1000/3000°K-94	Bianco (94)	3000	1005	24,6
411.0648.500.01.2700.94	*MINILINE/500/2700°K-94 DALI	Bianco (94)	2700	505	12,3
411.0648.500.01.94	MINILINE/500/3000°K-94 DALI	Bianco (94)	3000	505	12,3
411.0648.500.2700.94	*MINILINE/500/2700°K-94	Bianco (94)	2700	505	12,3
411.0648.500.94	MINILINE/500/3000°K-94	Bianco (94)	3000	505	12,3



Codice Articolo	Nome	Descrizione	Potenza (W)	Tipo di Driver	Colore
1.048100.H	Driver Constant Voltage 100W/48V IP20 BLACK	Driver Costant Voltage 48V: 220-240V/100W   Driver "invisibile" per alimentazione diretta completo di cablaggio	100	On/Off	Nero (92)