

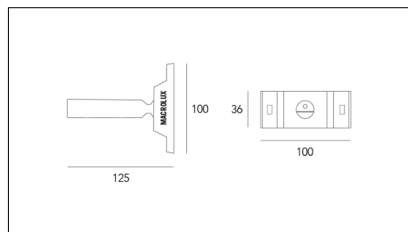




# MACROLUX

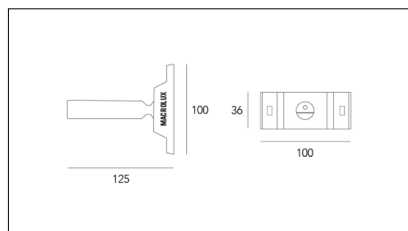


Article code	Article	Colour	Light Temperature (°K)	Watt (W)	Length (mm)
201.0005.2	TRATTO/5M/IP65/3000°K-2	Black (2)	3000	60	5000
201.0005.2700.2	TRATTO/5M/IP65/2700°K-2	Black (2)	2700	60	5000
201.0010.2	TRATTO/10M/IP65/3000°K-2	Black (2)	3000	120	10000
201.0010.2700.2	TRATTO/10M/IP65/2700°K-2	Black (2)	2700	120	10000
201.0015.2	TRATTO/15M/IP65/3000°K-2	Black (2)	3000	180	15000
201.0015.2700.2	TRATTO/15M/IP65/2700°K-2	Black (2)	2700	180	15000
201.0020.2	TRATTO/20M/IP65/3000°K-2	Black (2)	3000	240	20000
201.0020.2700.2	TRATTO/20M/IP65/2700°K-2	Black (2)	2700	240	20000




Article code	Article	Light Temperature (°K)	Watt (W)	Length (mm)	Colour
201.0005.2700.4	TRATTO/5M/IP65/2700°K-4	2700	60	5000	White (4)
201.0005.4	TRATTO/5M/IP65/3000°K-4	3000	60	5000	White (4)
201.0010.2700.4	TRATTO/10M/IP65/2700°K-4	2700	120	10000	White (4)
201.0010.4	TRATTO/10M/IP65/3000°K-4	3000	120	10000	White (4)
201.0015.2700.4	*TRATTO/15M/IP65/2700°K-4	2700	180	15000	White (4)
201.0015.4	*TRATTO/15M/IP65/3000°K-4	3000	180	15000	White (4)
201.0020.2700.4	*TRATTO/20M/IP65/2700°K-4	2700	240	20000	White (4)
201.0020.4	*TRATTO/20M/IP65/3000°K-4	3000	240	20000	White (4)




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	



Article code	Name	Description	Watt (W)	Driver's type
1.048075DA	Driver Constant Voltage 75W/48V IP67 DALI		75	DALI 2



Article code	Name	Description	Watt (W)	Driver's type
1.048150DA	Driver Constant Voltage 150W/48V IP67 DALI		150	DALI 2




Article code	Name	Description	Watt (W)	Driver's type
1.28003843	LC 200W 48V one4all NF SC EXC SP	Driver 48V 200W IP20 dimmerabile DALI 2/PUSH - Dimensioni 43 x 30 x 325mm	200	DALI 2 - PUSH




Article code	Name	Description
1.1335.0001	[STRIP LED 10MM] Connettore WIRE/BOARD	Connettore "Wire to Board" - Compatibile solo con Strip led 10mm IP20/IP65-NANO




Article code	Name	Description
1.1335.0002	[STRIP LED 10MM] Connettore BOARD/BOARD	Connettore "Board to Board" - Compatibile solo con Strip led 10mm IP20/IP65-NANO




Article code	Name	Description
201.0000	TRATTO/FORBICE	




Article code	Name	Description	Watt (W)	Driver's type
1.28003842	LC 100W 48V one4all NF SC EXC SP	Driver 48V 100W IP20 dimmerabile DALI 2/PUSH - Dimensioni 43 x 30 x 225mm	100	DALI 2 - PUSH




Article code	Name	Description	Watt (W)	Driver's type
1.186691	Driver Constant Voltage 75W/48V IP20	Driver Costant Voltage 48V: 220-240V/75W I Dimensions: 180x52x30mm	75	On/Off



Article code	Name	Description	Watt (W)	Driver's type
1.186692	Driver Constant Voltage 120W/48V IP20	Driver Costant Voltage 48V: 220-240V/120W I Dimensions: 300x40x30mm	120	On/Off



Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1.01.012.2700.IP65N.48	BOBINA LED L= 5m 12W/m 2700°K IP65 NANO 48V	Striscia LED flessibile, larghezza 10mm, divisibile per multipli di 25mm, base bianca, temperatura di colore 2700°K, angolo di emissione 120°, 160LED/m, potenza 12W/m, 48V, IP65/NANO, CRI maggiore o uguale 80	12	2700	5000



Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1.01.012.3000.IP65N.48	BOBINA LED L= 5m 12W/m 3000°K IP65 NANO 48V	Striscia LED flessibile, larghezza 10mm, divisibile per multipli di 25mm, base bianca, temperatura di colore 3000°K, angolo di emissione 120°, 160LED/m, potenza 12W/m, 48V, IP65/NANO, CRI maggiore o uguale 80	12	3000	5000