

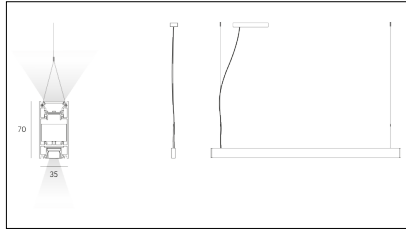





MACROLUX

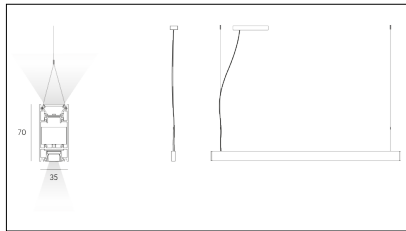

Article code	Article	Colour	Beam angle (°)	Light Temperature (°K)	Watt (W)	Length (mm)	UGR
82.1400.01.4000.92	*HB/S/1410/64W/4000°K-92 DALI	Black (92)	54	4000	64	1410	UGR<19
82.1400.01.92	*HB/S/1410/64W/3000°K-92 DALI	Black (92)	54	3000	64	1410	UGR<19
82.1400.02.4000.92	*HB/S/1410/64W/4000°K-92 PUSH	Black (92)	54	4000	64	1410	UGR<19
82.1400.02.92	HB/S/1410/64W/3000°K-92 PUSH	Black (92)	54	3000	64	1410	UGR<19
82.1400.4000.92	*HB/S/1410/64W/4000°K-92	Black (92)	54	4000	64	1410	UGR<19
82.1400.92	HB/S/1410/64W/3000°K-92	Black (92)	54	3000	64	1410	UGR<19
82.1680.01.4000.92	*HB/S/1690/77W/4000°K-92 DALI	Black (92)	54	4000	77	1680	UGR<19
82.1680.01.92	HB/S/1690/77W/3000°K-92 DALI	Black (92)	54	3000	77	1680	UGR<19
82.1680.02.4000.92	HB/S/1690/77W/4000°K-92 PUSH	Black (92)	54	4000	77	1680	UGR<19
82.1680.02.92	HB/S/1690/77W/3000°K-92 PUSH	Black (92)	54	3000	77	1680	UGR<19
82.1680.4000.92	*HB/S/1690/77W/4000°K-92	Black (92)	54	4000	77	1680	UGR<19
82.1680.92	HB/S/1690/77W/3000°K-92	Black (92)	54	3000	77	1680	UGR<19
82.2240.01.4000.92	*HB/S/2250/103W/4000°K-92 DALI	Black (92)	54	4000	103	2240	UGR<19
82.2240.01.92	HB/S/2250/103W/3000°K-92 DALI	Black (92)	54	3000	103	2240	UGR<19
82.2240.02.4000.92	*HB/S/2250/103W/4000°K-92 PUSH	Black (92)	54	4000	103	2240	UGR<19
82.2240.02.92	HB/S/2250/103W/3000°K-92 PUSH	Black (92)	54	3000	103	2240	UGR<19
82.2240.4000.92	*HB/S/2250/103W/4000°K-92	Black (92)	54	4000	103	2240	UGR<19
82.2240.92	HB/S/2250/103W/3000°K-92	Black (92)	54	3000	103	2240	UGR<19



Article code	Article	Colour	Beam angle (°)	Light Temperature (°K)	Watt (W)	Length (mm)	UGR
82.1400.01.4000.94	*HB/S/1410/64W/4000°K-94 DALI	White (94)	54	4000	64	1410	UGR<19
82.1400.01.94	*HB/S/1410/64W/3000°K-94 DALI	White (94)	54	3000	64	1410	UGR<19
82.1400.02.4000.94	*HB/S/1410/64W/4000°K-94 PUSH	White (94)	54	4000	64	1410	UGR<19
82.1400.02.94	*HB/S/1410/64W/3000°K-94 PUSH	White (94)	54	3000	64	1410	UGR<19
82.1400.4000.94	HB/S/1410/64W/4000°K-94	White (94)	54	4000	64	1410	UGR<19
82.1400.94	HB/S/1410/64W/3000°K-94	White (94)	54	3000	64	1410	UGR<19
82.1680.01.4000.94	*HB/S/1690/77W/4000°K-94 DALI	White (94)	54	4000	77	1680	UGR<19
82.1680.01.94	HB/S/1690/77W/3000°K-94 DALI	White (94)	54	3000	77	1680	UGR<19
82.1680.02.4000.94	*HB/S/1690/77W/4000°K-94 PUSH	White (94)	54	4000	77	1680	UGR<19
82.1680.02.94	HB/S/1690/77W/3000°K-94 PUSH	White (94)	54	3000	77	1680	UGR<19
82.1680.4000.94	*HB/S/1690/77W/4000°K-94	White (94)	54	4000	77	1680	UGR<19
82.1680.94	HB/S/1690/77W/3000°K-94	White (94)	54	3000	77	1680	UGR<19
82.2240.01.4000.94	*HB/S/2250/103W/4000°K-94 DALI	White (94)	54	4000	103	2240	UGR<19
82.2240.01.94	HB/S/2250/103W/3000°K-94 DALI	White (94)	54	3000	103	2240	UGR<19
82.2240.02.4000.94	*HB/S/2250/103W/4000°K-94 PUSH	White (94)	54	4000	103	2240	UGR<19
82.2240.02.94	HB/S/2250/103W/3000°K-94 PUSH	White (94)	54	3000	103	2240	UGR<19
82.2240.4000.94	*HB/S/2250/103W/4000°K-94	White (94)	54	4000	103	2240	UGR<19
82.2240.94	*HB/S/2250/103W/3000°K-94	White (94)	54	3000	103	2240	UGR<19

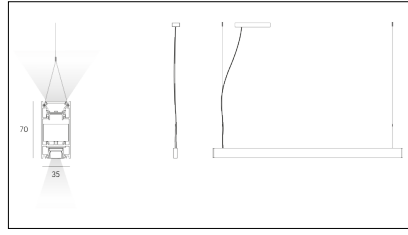

Article code	Article	Colour	Beam angle (°)	Light Temperature (°K)	Watt (W)	Length (mm)	UGR
82.1400.01.4000.96	*HB/S/1410/64W/4000°K-96 DALI	Bronze (96)	54	4000	64	1410	UGR<19
82.1400.01.96	*HB/S/1410/64W/3000°K-96 DALI	Bronze (96)	54	3000	64	1410	UGR<19
82.1400.02.4000.96	*HB/S/1410/64W/4000°K-96 PUSH	Bronze (96)	54	4000	64	1410	UGR<19
82.1400.02.96	HB/S/1410/64W/3000°K-96 PUSH	Bronze (96)	54	3000	64	1410	UGR<19
82.1400.4000.96	*HB/S/1410/64W/4000°K-96	Bronze (96)	54	4000	64	1410	UGR<19
82.1400.96	HB/S/1410/64W/3000°K-96	Bronze (96)	54	3000	64	1410	UGR<19
82.1680.01.4000.96	*HB/S/1690/77W/4000°K-96 DALI	Bronze (96)	54	4000	77	1680	UGR<19
82.1680.01.96	HB/S/1690/77W/3000°K-96 DALI	Bronze (96)	54	3000	77	1680	UGR<19
82.1680.02.4000.96	*HB/S/1690/77W/4000°K-96 PUSH	Bronze (96)	54	4000	77	1680	UGR<19
82.1680.02.96	HB/S/1690/77W/3000°K-96 PUSH	Bronze (96)	54	3000	77	1680	UGR<19
82.1680.4000.96	*HB/S/1690/77W/4000°K-96	Bronze (96)	54	4000	77	1680	UGR<19
82.1680.96	HB/S/1690/77W/3000°K-96	Bronze (96)	54	3000	77	1680	UGR<19
82.2240.01.4000.96	HB/S/2250/103W/4000°K-96 DALI	Bronze (96)	54	4000	103	2240	UGR<19
82.2240.01.96	*HB/S/2250/103W/3000°K-96 DALI	Bronze (96)	54	3000	103	2240	UGR<19
82.2240.02.4000.96	*HB/S/2250/103W/4000°K-96 PUSH	Bronze (96)	54	4000	103	2240	UGR<19
82.2240.02.96	HB/S/2250/103W/3000°K-96 PUSH	Bronze (96)	54	3000	103	2240	UGR<19
82.2240.4000.96	*HB/S/2250/103W/4000°K-96	Bronze (96)	54	4000	103	2240	UGR<19
82.2240.96	HB/S/2250/103W/3000°K-96	Bronze (96)	54	3000	103	2240	UGR<19