

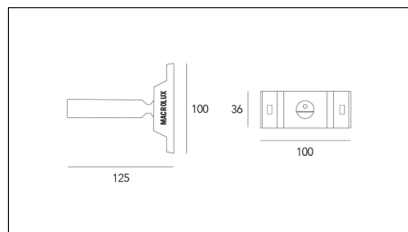




# MACROLUX

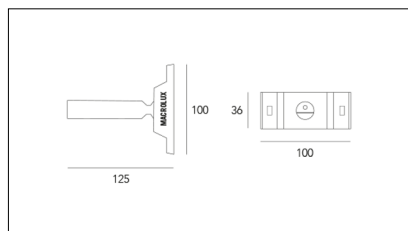


| Article code    | Article                  | Colour    | Light Temperature (°K) | Length (mm) | Watt (W) |
|-----------------|--------------------------|-----------|------------------------|-------------|----------|
| 201.2005.2      | TRATTO/5M/IP20/3000°K-2  | Black (2) | 3000                   | 5000        | 50       |
| 201.2005.2700.2 | TRATTO/5M/IP20/2700°K-2  | Black (2) | 2700                   | 5000        | 50       |
| 201.2010.2      | TRATTO/10M/IP20/3000°K-2 | Black (2) | 3000                   | 10000       | 100      |
| 201.2010.2700.2 | TRATTO/10M/IP20/2700°K-2 | Black (2) | 2700                   | 10000       | 100      |
| 201.2015.2      | TRATTO/15M/IP20/3000°K-2 | Black (2) | 3000                   | 15000       | 150      |
| 201.2015.2700.2 | TRATTO/15M/IP20/2700°K-2 | Black (2) | 2700                   | 15000       | 150      |
| 201.2020.2      | TRATTO/20M/IP20/3000°K-2 | Black (2) | 3000                   | 20000       | 200      |
| 201.2020.2700.2 | TRATTO/20M/IP20/2700°K-2 | Black (2) | 2700                   | 20000       | 200      |




| Article code    | Article                   | Light Temperature (°K) | Length (mm) | Watt (W) | Colour    |
|-----------------|---------------------------|------------------------|-------------|----------|-----------|
| 201.2005.2700.4 | TRATTO/5M/IP20/2700°K-4   | 2700                   | 5000        | 50       | White (4) |
| 201.2005.4      | TRATTO/5M/IP20/3000°K-4   | 3000                   | 5000        | 50       | White (4) |
| 201.2010.2700.4 | *TRATTO/10M/IP20/2700°K-4 | 2700                   | 10000       | 100      | White (4) |
| 201.2010.4      | TRATTO/10M/IP20/3000°K-4  | 3000                   | 10000       | 100      | White (4) |
| 201.2015.2700.4 | *TRATTO/15M/IP20/2700°K-4 | 2700                   | 15000       | 150      | White (4) |
| 201.2015.4      | *TRATTO/15M/IP20/3000°K-4 | 3000                   | 15000       | 150      | White (4) |
| 201.2020.2700.4 | *TRATTO/20M/IP20/2700°K-4 | 2700                   | 20000       | 200      | White (4) |
| 201.2020.4      | *TRATTO/20M/IP20/3000°K-4 | 3000                   | 20000       | 200      | White (4) |




| Article code | Name                                     | Description |
|--------------|--|-------------|
| 1324.0000    | STRIP LED/Primer monouso 0,66 ml         |             |
| 1324.0000.10 | STRIP LED/Primer monouso 0,66 ml - 10 PZ |             |



| Article code | Name                                      | Description | Watt (W) | Driver's type |
|--------------|---|-------------|----------|---------------|
| 1.048075DA   | Driver Constant Voltage 75W/48V IP67 DALI |             | 75       | DALI 2        |




| Article code | Name                                       | Description | Watt (W) | Driver's type |
|--------------|--|-------------|----------|---------------|
| 1.048150DA   | Driver Constant Voltage 150W/48V IP67 DALI |             | 150      | DALI 2        |




| Article code | Name                             | Description   | Watt (W) | Driver's type |
|--------------|----------------------------------|---|----------|---------------|
| 1.28003843   | LC 200W 48V one4all NF SC EXC SP | Driver 48V 200W IP20 dimmerabile DALI 2/PUSH - Dimensioni 43 x 30 x 325mm | 200      | DALI 2 - PUSH |




| Article code | Name                                    | Description  |
|--------------|---|--|
| 1.1335.0002  | [STRIP LED 10MM] Connettore BOARD/BOARD | Connettore "Board to Board" - Compatibile solo con Strip led 10mm IP20/IP65-NANO |




| Article code | Name           | Description |
|--------------|----------------|-------------|
| 201.0000     | TRATTO/FORBICE |             |



| Article code | Name                             | Description   | Watt (W) | Driver's type |
|--------------|----------------------------------|---|----------|---------------|
| 1.28003842   | LC 100W 48V one4all NF SC EXC SP | Driver 48V 100W IP20 dimmerabile DALI 2/PUSH - Dimensioni 43 x 30 x 225mm | 100      | DALI 2 - PUSH |



| Article code | Name                                 | Description   | Watt (W) | Driver's type |
|--------------|--------------------------------------|---|----------|---------------|
| 1.186691     | Driver Constant Voltage 75W/48V IP20 | Driver Costant Voltage 48V: 220-240V/75W I<br>Dimensions: 180x52x30mm | 75       | On/Off        |



| Article code | Name                                  | Description  | Watt (W) | Driver's type |
|--------------|---------------------------------------|--|----------|---------------|
| 1.186692     | Driver Constant Voltage 120W/48V IP20 | Driver Costant Voltage 48V: 220-240V/120W I<br>Dimensions: 300x40x30mm | 120      | On/Off        |