

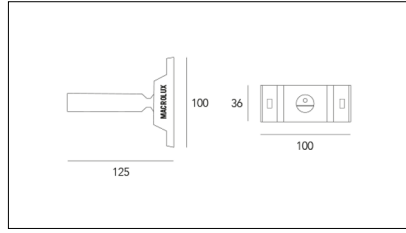




MACROLUX

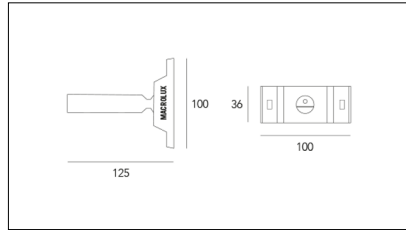


Article code	Article	Colour	Light Temperature (°K)	Length (mm)	Watt (W)
201.2005.2	TRATTO/5M/IP20/3000°K-2	Black (2)	3000	5000	50
201.2005.2700.2	TRATTO/5M/IP20/2700°K-2	Black (2)	2700	5000	50
201.2010.2	TRATTO/10M/IP20/3000°K-2	Black (2)	3000	10000	100
201.2010.2700.2	TRATTO/10M/IP20/2700°K-2	Black (2)	2700	10000	100
201.2015.2	TRATTO/15M/IP20/3000°K-2	Black (2)	3000	15000	150
201.2015.2700.2	TRATTO/15M/IP20/2700°K-2	Black (2)	2700	15000	150
201.2020.2	TRATTO/20M/IP20/3000°K-2	Black (2)	3000	20000	200
201.2020.2700.2	TRATTO/20M/IP20/2700°K-2	Black (2)	2700	20000	200




Article code	Article	Light Temperature (°K)	Length (mm)	Watt (W)	Colour
201.2005.2700.4	TRATTO/5M/IP20/2700°K-4	2700	5000	50	White (4)
201.2005.4	TRATTO/5M/IP20/3000°K-4	3000	5000	50	White (4)
201.2010.2700.4	TRATTO/10M/IP20/2700°K-4	2700	10000	100	White (4)
201.2010.4	TRATTO/10M/IP20/3000°K-4	3000	10000	100	White (4)
201.2015.2700.4	*TRATTO/15M/IP20/2700°K-4	2700	15000	150	White (4)
201.2015.4	*TRATTO/15M/IP20/3000°K-4	3000	15000	150	White (4)
201.2020.2700.4	*TRATTO/20M/IP20/2700°K-4	2700	20000	200	White (4)
201.2020.4	*TRATTO/20M/IP20/3000°K-4	3000	20000	200	White (4)




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	
1324.0000.10	STRIP LED/Primer monouso 0,66 ml - 10 PZ	



Article code	Name	Description	Watt (W)	Driver's type
1.048075DA	Driver Constant Voltage 75W/48V IP67 DALI		75	DALI 2




Article code	Name	Description	Watt (W)	Driver's type
1.048150DA	Driver Constant Voltage 150W/48V IP67 DALI		150	DALI 2




Article code	Name	Description	Watt (W)	Driver's type
1.28003843	LC 200W 48V one4all NF SC EXC SP	Driver 48V 200W IP20 dimmerabile DALI 2/PUSH - Dimensioni 43 x 30 x 325mm	200	DALI 2 - PUSH




Article code	Name	Description
1.1335.0002	[STRIP LED 10MM] Connettore BOARD/BOARD	Connettore "Board to Board" - Compatibile solo con Strip led 10mm IP20/IP65-NANO




Article code	Name	Description
201.0000	TRATTO/FORBICE	




Article code	Name	Description	Watt (W)	Driver's type
1.28003842	LC 100W 48V one4all NF SC EXC SP	Driver 48V 100W IP20 dimmerabile DALI 2/PUSH - Dimensioni 43 x 30 x 225mm	100	DALI 2 - PUSH



Article code	Name	Description	Watt (W)	Driver's type
1.186691	Driver Constant Voltage 75W/48V IP20	Driver Costant Voltage 48V: 220-240V/75W I Dimensions: 180x52x30mm	75	On/Off



Article code	Name	Description	Watt (W)	Driver's type
1.186692	Driver Constant Voltage 120W/48V IP20	Driver Costant Voltage 48V: 220-240V/120W I Dimensions: 300x40x30mm	120	On/Off



Article code	Name	Description	Watt (W)	Light Temperature (°K)	Length (mm)
1.01.010.3000.IP20.48	BOBINA LED L= 5m 10W/m 3000°K IP20 48V	Striscia LED flessibile, larghezza 10mm, divisibile per multipli di 100mm, base bianca, temperatura di colore 3000°K, angolo di emissione 120°, 150LED/m, potenza 10W/m, 48V, IP20, CRI maggiore o uguale 90	10	3000	5000