




MACROLUX

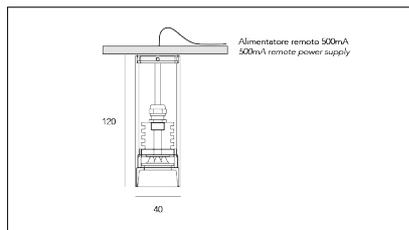


Article code	Article	Colour	Beam angle (°)	Light Temperature (°K)	Watt (W)
1912.0120.15.22	SLY/PLAFONE-22 4.3W max 500mA 15° IP67	Black/Black (22)	15	3000	4.3
1912.0120.15.2700.22	*SLY/PLAFONE-22 4.3W max 500mA 15° 2700°K	Black/Black (22)	15	2700	4.3
1912.0120.15.4000.22	*SLY/PLAFONE-22 4.3W max 500mA 15° 4000°K	Black/Black (22)	15	4000	4.3
1912.0120.25.22	SLY/PLAFONE-22 4.3W max 500mA 25° IP67	Black/Black (22)	25	3000	4.3
1912.0120.25.2700.22	SLY/PLAFONE-22 4.3W max 500mA 25° 2700°K	Black/Black (22)	25	2700	4.3
1912.0120.25.4000.22	*SLY/PLAFONE-22 4.3W max 500mA 25° 4000°K	Black/Black (22)	25	4000	4.3

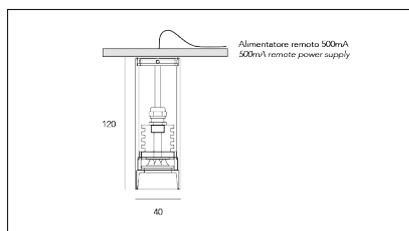


Article code	Article	Colour	Beam angle (°)	Light Temperature (°K)	Watt (W)
1912.0120.15.2700.42	*SLY/PLAFONE-42 4.3W max 500mA 15° 2700°K	White/Black (42)	15	2700	4.3
1912.0120.15.4000.42	*SLY/PLAFONE-42 4.3W max 500mA 15° 4000°K	White/Black (42)	15	4000	4.3
1912.0120.15.42	SLY/PLAFONE-42 4.3W max 500mA 15° IP67	White/Black (42)	15	3000	4.3
1912.0120.25.2700.42	SLY/PLAFONE-42 4.3W max 500mA 25° 2700°K	White/Black (42)	25	2700	4.3
1912.0120.25.4000.42	*SLY/PLAFONE-42 4.3W max 500mA 25° 4000°K	White/Black (42)	25	4000	4.3
1912.0120.25.42	SLY/PLAFONE-42 4.3W max 500mA 25° IP67	White/Black (42)	25	3000	4.3

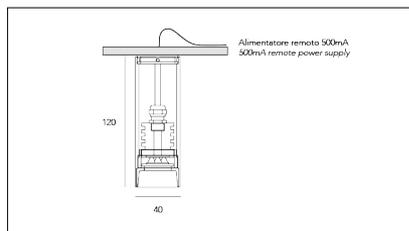


Article code	Article	Colour	Beam angle (°)	Light Temperature (°K)	Watt (W)
1912.0120.15.2700.296	*SLY/PLAFONE-296 4.3W max 500mA 15° 2700°K	Black/Bronze (296)	15	2700	4.3
1912.0120.15.296	*SLY/PLAFONE-296 4.3W max 500mA 15°	Black/Bronze (296)	15	3000	4.3
1912.0120.15.4000.296	*SLY/PLAFONE-296 4.3W max 500mA 15° 4000°K	Black/Bronze (296)	15	4000	4.3
1912.0120.25.2700.296	SLY/PLAFONE-296 4.3W max 500mA 25° 2700°K	Black/Bronze (296)	25	2700	4.3
1912.0120.25.296	*SLY/PLAFONE-296 4.3W max 500mA 25°	Black/Bronze (296)	25	3000	4.3
1912.0120.25.4000.296	*SLY/PLAFONE-296 4.3W max 500mA 25° 4000°K	Black/Bronze (296)	25	4000	4.3

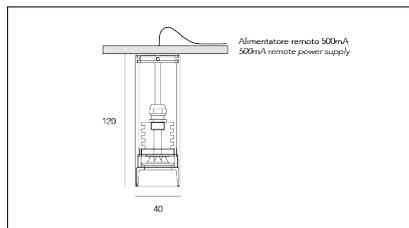


Article code	Article	Colour	Beam angle (°)	Light Temperature (°K)	Watt (W)
1912.0120.15.2700.496	*SLY/PLAFONE-496 4.3W max 500mA 15° 2700°K	White/Bronze (496)	15	2700	4.3
1912.0120.15.4000.496	*SLY/PLAFONE-496 4.3W max 500mA 15° 4000°K	White/Bronze (496)	15	4000	4.3
1912.0120.15.496	SLY/PLAFONE-496 4.3W max 500mA 15° IP67	White/Bronze (496)	15	3000	4.3
1912.0120.25.2700.496	*SLY/PLAFONE-496 4.3W max 500mA 25° 2700°K	White/Bronze (496)	25	2700	4.3
1912.0120.25.4000.496	*SLY/PLAFONE-496 4.3W max 500mA 25° 4000°K	White/Bronze (496)	25	4000	4.3
1912.0120.25.496	*SLY/PLAFONE-496 4.3W max 500mA 25°	White/Bronze (496)	25	3000	4.3

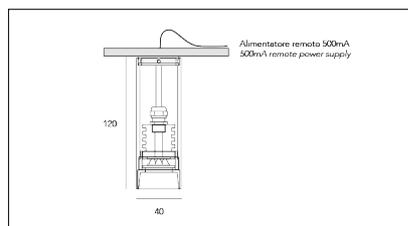


Article code	Article	Beam angle (°)	Light Temperature (°K)	Watt (W)	Colour
1912.0120.15.2700.96	*SLY/PLAFONE-96 4.3W max 500mA 15° 2700°K	15	2700	4.3	Bronze (96)
1912.0120.15.2700.962	*SLY/PLAFONE-962 4.3W max 500mA 15° 2700°K	15	2700	4.3	Bronze/Black (962)
1912.0120.15.4000.96	*SLY/PLAFONE-96 4.3W max 500mA 15° 4000°K	15	4000	4.3	Bronze (96)
1912.0120.15.4000.962	*SLY/PLAFONE-962 4.3W max 500mA 15° 4000°K	15	4000	4.3	Bronze/Black (962)
1912.0120.15.96	SLY/PLAFONE-96 4.3W max 500mA 15°	15	3000	4.3	Bronze (96)
1912.0120.15.962	SLY/PLAFONE-962 4.3W max 500mA 15° IP67	15	3000	4.3	Bronze/Black (962)
1912.0120.25.2700.96	*SLY/PLAFONE-96 4.3W max 500mA 25° 2700°K	25	2700	4.3	Bronze (96)
1912.0120.25.2700.962	*SLY/PLAFONE-962 4.3W max 500mA 25° 2700°K	25	2700	4.3	Bronze/Black (962)
1912.0120.25.4000.96	*SLY/PLAFONE-96 4.3W max 500mA 25° 4000°K	25	4000	4.3	Bronze (96)
1912.0120.25.4000.962	*SLY/PLAFONE-962 4.3W max 500mA 25° 4000°K	25	4000	4.3	Bronze/Black (962)
1912.0120.25.96	*SLY/PLAFONE-96 4.3W max 500mA 25°	25	3000	4.3	Bronze (96)
1912.0120.25.962	SLY/PLAFONE-962 4.3W max 500mA 25° IP67	25	3000	4.3	Bronze/Black (962)



Article code	Name	Description	Watt (W)	Current	Driver's type
1.122602	DC 6W 500mA BULL/U	Alimentatore Led 500mA 6W - Tensione Nominale 100 ÷ 240 V	6	500mA	On/Off



Article code	Name	Description	Watt (W)	Current	Driver's type
1.127711	DCC 12W 500mA HPFU	Alimentatore elettronico in corrente continua per LED 12W/500mA - Dimensioni 34x19x115mm	12	500mA	On/Off



Article code	Name	Description	Watt (W)	Current	Driver's type
1.141060	STCP 6W 500mA HPFU IP54	Alimentatore IP54 6W 500mA	6	500mA	On/Off