


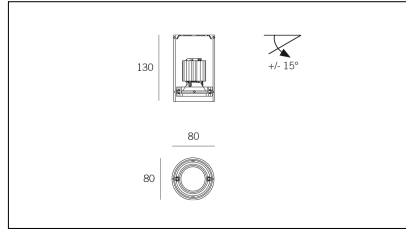




# MACROLUX





Codice Articolo	Articolo	Colore	Temperatura Luce (°K)	Potenza (W)	Emissione (°)
321.0022.01.20.2	CUBE/T-2 5.8W max 350mA 25°	Nero (2)	3000	6,1	25
321.0022.01.40.2	CUBE/T-2 5.8W max 350mA 34°	Nero (2)	3000	6,1	34
321.0022.01.4000.20.2	CUBE/T-2 5.8W max 350mA 25° 4000°K	Nero (2)	4000	6,1	25
321.0022.01.4000.40.2	CUBE/T-2 5.8W max 350mA 34° 4000°K	Nero (2)	4000	6,1	34

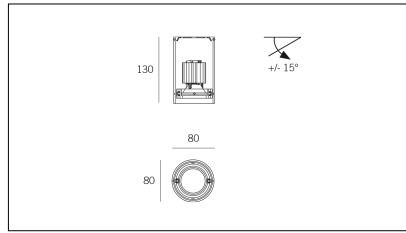


Codice Articolo	Articolo	Colore	Temperatura Luce (°K)	Potenza (W)	Emissione (°)
321.0022.01.20.4	CUBE/T-4 5.8W max 350mA 25°	Bianco (4)	3000	6,1	25
321.0022.01.40.4	CUBE/T-4 5.8W max 350mA 34°	Bianco (4)	3000	6,1	34
321.0022.01.4000.20.4	*CUBE	Bianco (4)	4000	6,1	25
321.0022.01.4000.40.4	*CUBE	Bianco (4)	4000	6,1	34

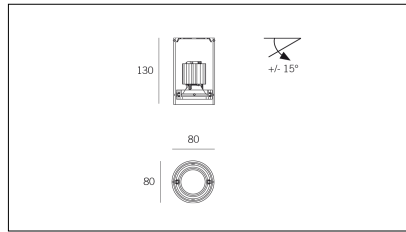

Codice Articolo	Articolo	Colore	Temperatura Luce (°K)	Potenza (W)	Emissione (°)
321.0022.01.2700.20.2	*CUBE	Nero (2)	2700	6,1	25
321.0022.01.2700.40.2	*CUBE	Nero (2)	2700	6,1	34

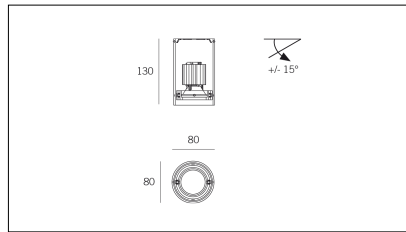

Codice Articolo	Articolo	Colore	Temperatura Luce (°K)	Potenza (W)	Emissione (°)
321.0022.01.2700.20.4	CUBE/T-4 5.8W max 350mA 25° 2700°K	Bianco (4)	2700	6,1	25
321.0022.01.2700.40.4	CUBE/T-4 5.8W max 350mA 34° 2700°K	Bianco (4)	2700	6,1	34



Codice Articolo	Nome	Descrizione	Potenza (W)	Corrente	Tipo di Driver
1.122598	DC 8W 350mA BULL/U	Alimentatore Led 350mA 8W - Tensione Nominale 100 ÷ 240 V	8	350mA	On/Off